


OCTA NORM

EXTRUSIONS

COMBINE
WITH A SYSTEM

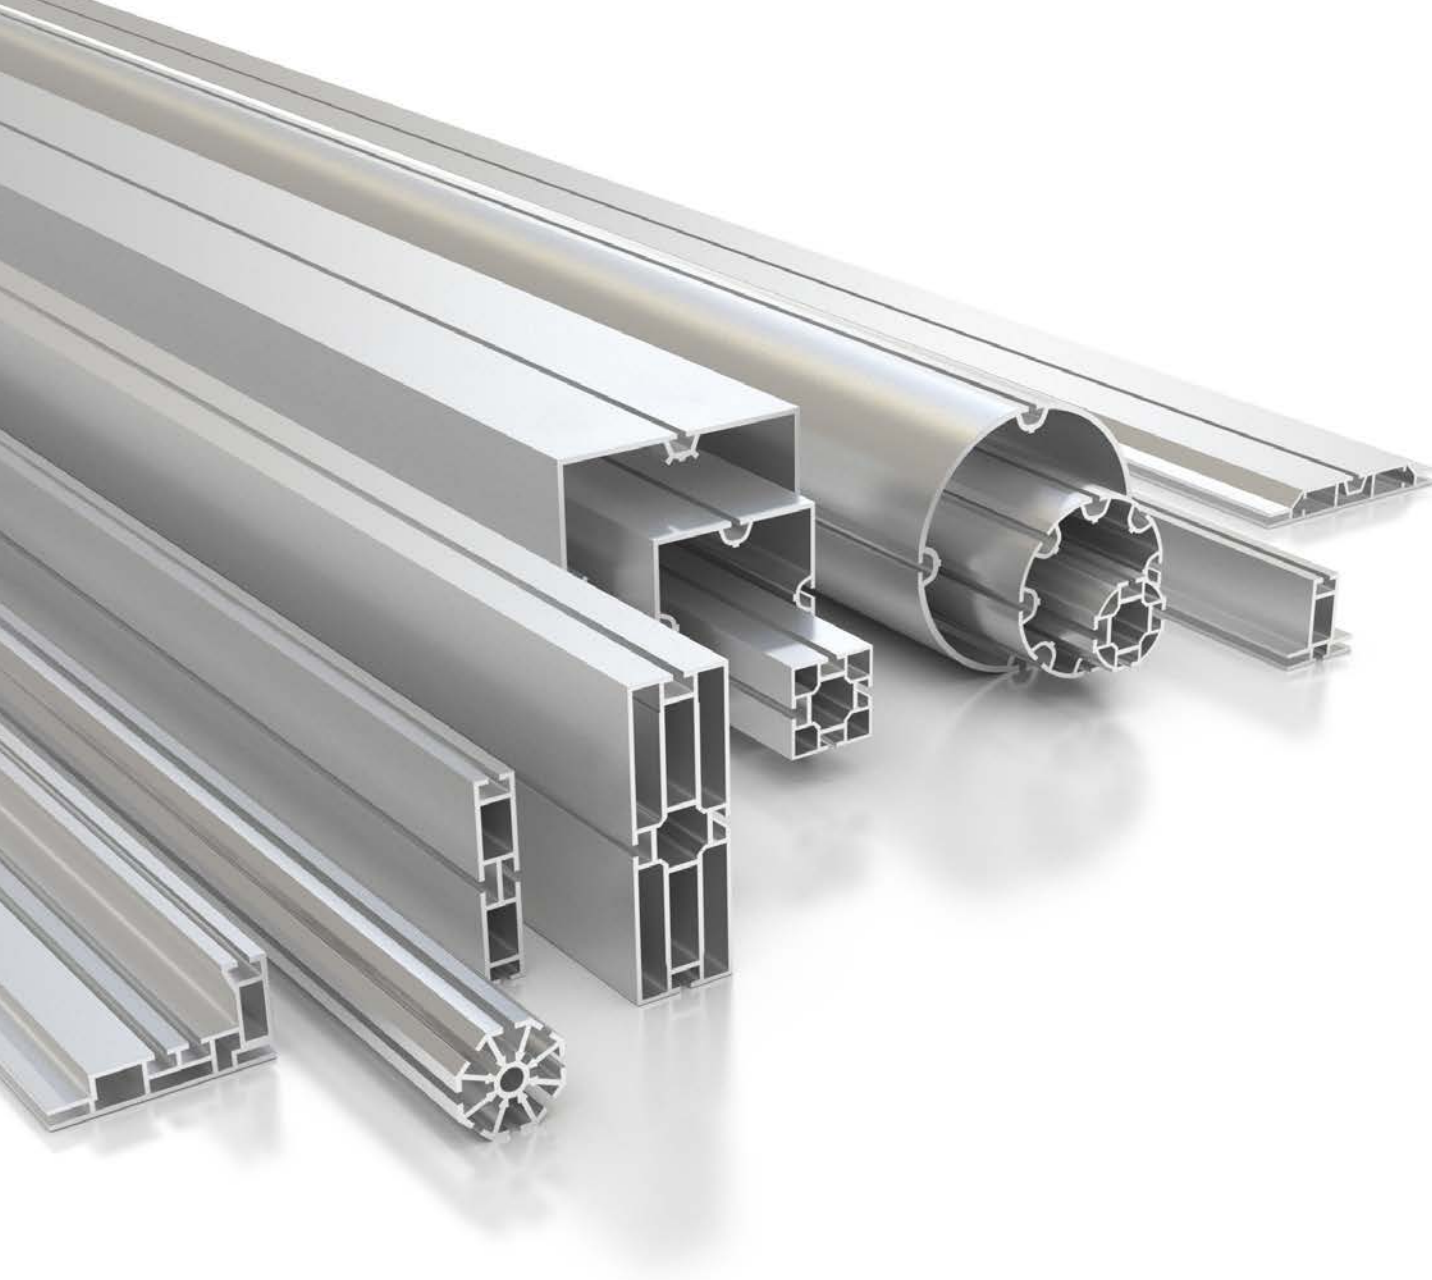

- This brochure is a collection of extrusions, sorted by function and form for your convenience
- All drawings are true to size, unless stated otherwise
- Standard length are 5000 mm and 6000 mm depending on product line. Special lengths are available to a maximum of 6930 mm. All custom lengths are special order only
- All extrusions can be supplied fully assembled
- All extrusions are available either raw, matt anodized (E6/EV1), polished anodized (E4/EV1), protective anodized or with RAL powder coating
- Most articles displayed are readily available, depending on demand and finish
- Articles marked with * are only available on request in minimum order quantities with a certain lead time
- Non-standard extrusions, made for your requirements, can be realized on demand

CONTENT

ALUMINIUM EXTRUSIONS	5
UPRIGHTS AND BEAMS	7
Square Extrusions	9
Rectangular Extrusion	15
Octagonal Extrusions	27
Triangular Extrusions	29
Corner Extrusions	31
Hinged Extrusions	33
Round Extrusions	35
Oval Extrusions	37
FABRIC MOUNTING	39
Tension Fabric Extrusions	41
Fabric Suspension Extrusions	53
SPECIAL TYPE EXTRUSIONS	55
Cover Extrusions	57
Wall Panel Retainer	59
Skirting Extrusions	61
Other Extrusions	63
CLEANROOM EXTRUSIONS	65
Wall Extrusions	67
Ceiling Extrusions	73
Door Extrusions	75
PLASTIC EXTRUSIONS	81
INDEX	87





ALU MIN IUM




The OCTANORM® systems consist of an extremely wide range of aluminium extrusions. The high specific strength of our premium quality aluminum alloy makes it an ideal material for our OCTANORM® components and guarantees decades of reusability. The light weight makes for short assembly times and also reduces transport costs and CO2 emissions.

UP RIGHTS AND BEAMS

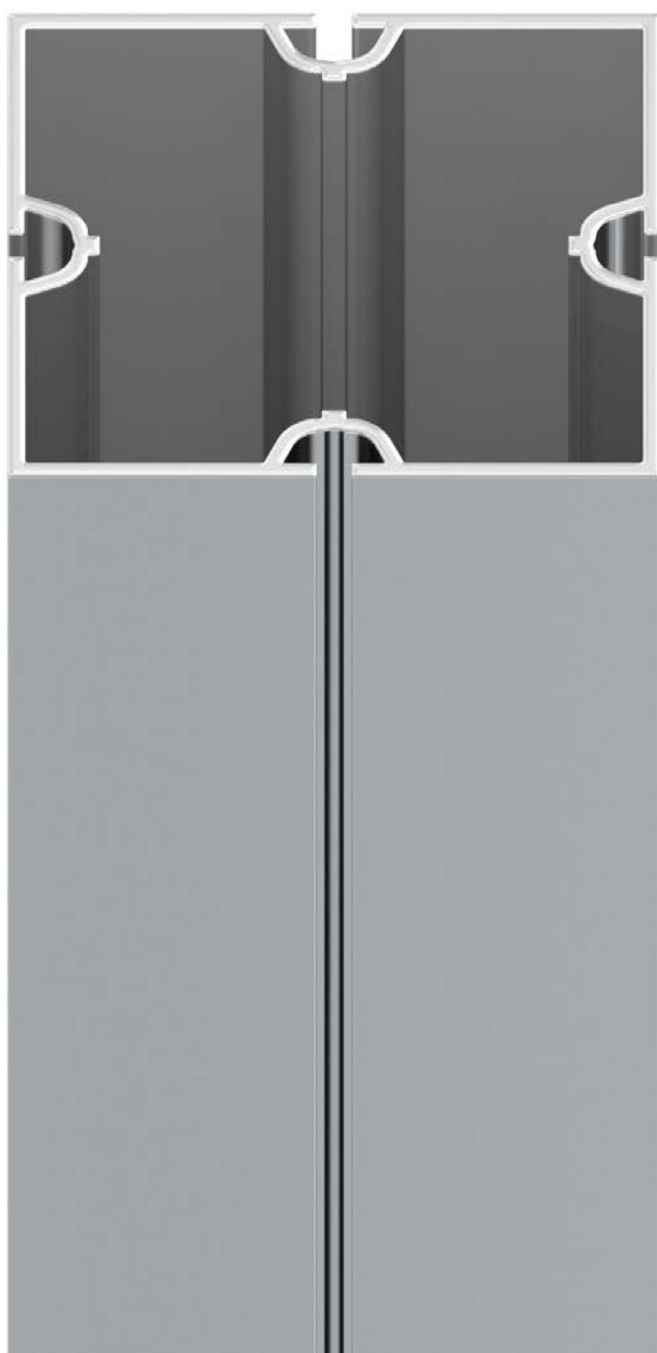





M 1618 Square extrusion 18 mm
1.99 kg | 5000 mm




M 1625 Square extrusion 22 mm
2.15 kg | 5000 mm




M 1400 Square extrusion 26.3 mm
2.17 kg | 5000 mm




V 2000 Square extrusion 25 mm
2.89 kg | 5000 mm



S 10* Square extrusion 25 mm
3.08 kg | 5000 mm




S 1123 Square extrusion 32 mm
3.77 kg | 5000 mm

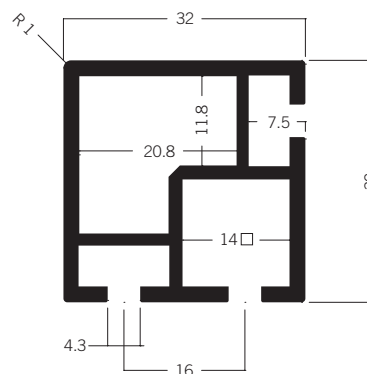

S 1125 Square extrusion 32 mm
4.03 kg | 5000 mm


UPRIGHTS AND BEAMS

Square Extrusions

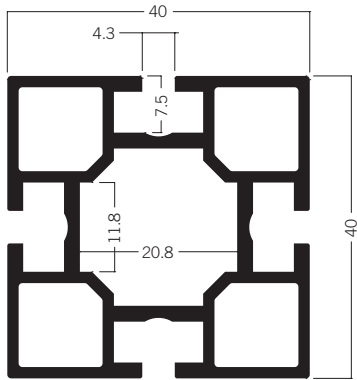


M 1000 Square extrusion 40 mm
5.78 kg | 5000 mm

M 1001 Square extrusion 40 mm
6.97 kg | 6000 mm

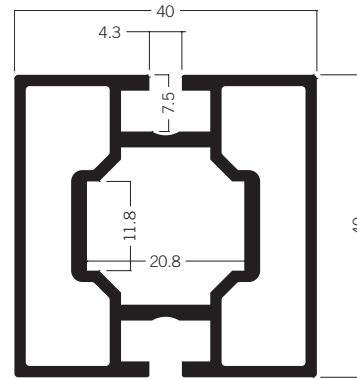


M 1002 Square extrusion 40 mm
5.55 kg | 5000 mm


M 1003 Square extrusion 40 mm
6.92 kg | 6000 mm

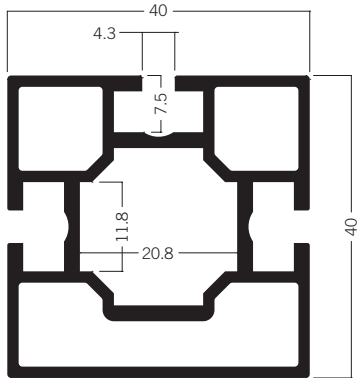


M 1005 Square extrusion 40 mm
6.66 kg | 6000 mm

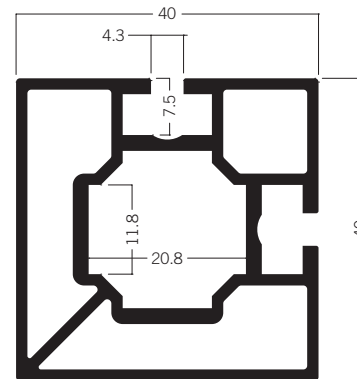


M 1007 Square extrusion 40 mm
7.17 kg | 6000 mm

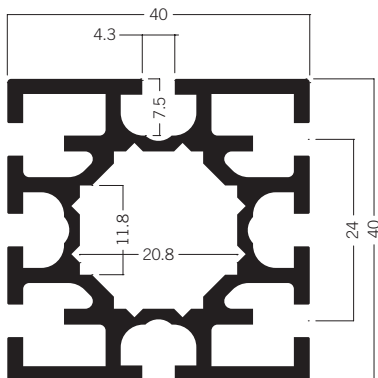

S 209 Square extrusion 40 mm
8.05 kg | 6000 mm

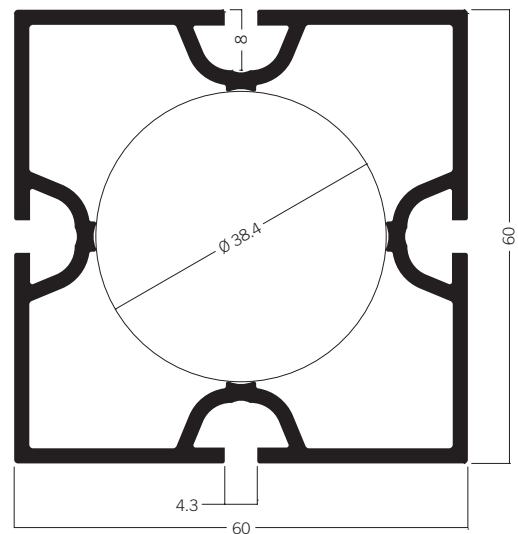


M 1010 Square extrusion 60 mm
8.13 kg | 5000 mm

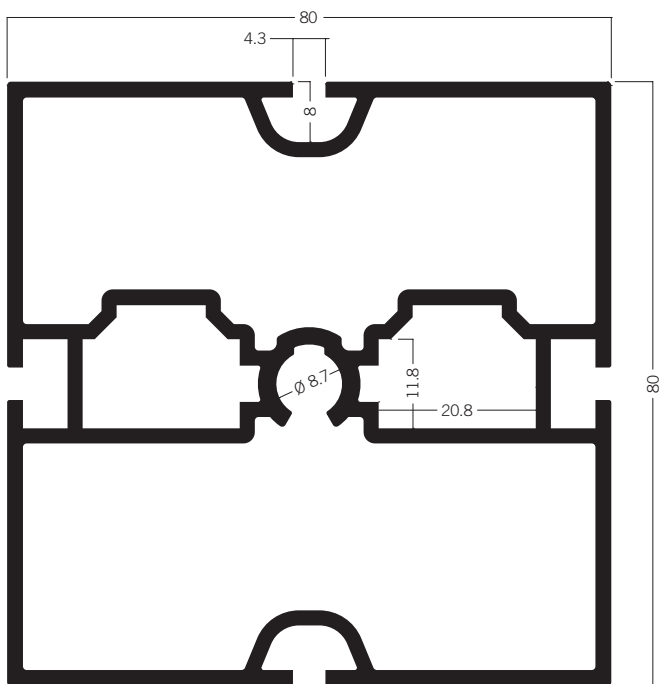


M 1018 Square extrusion 80 mm
14.91 kg | 5000 mm

M 1019 Square extrusion 80 mm
17.80 kg | 6000 mm

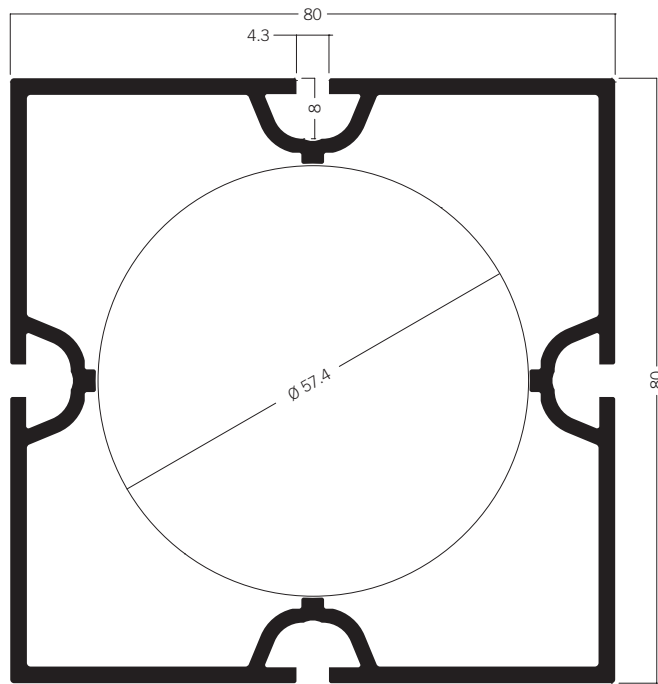


M 1020 Square extrusion 80 mm
11.51 kg | 5000 mm

M 1021 Square extrusion 80 mm
12.89 kg | 6000 mm

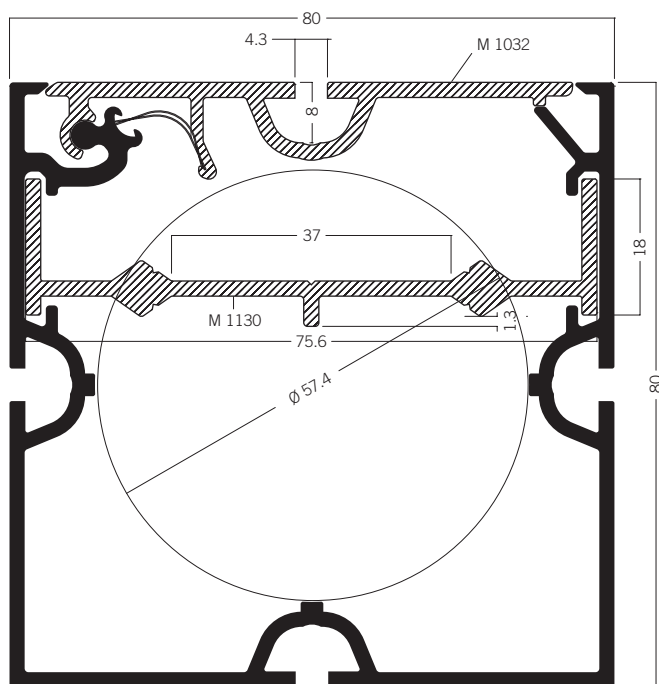

M 1022* Square extrusion 80 mm
15.66 kg | 5000 mm


M 1023 Square extrusion 80 mm
17.24 kg | 6000 mm

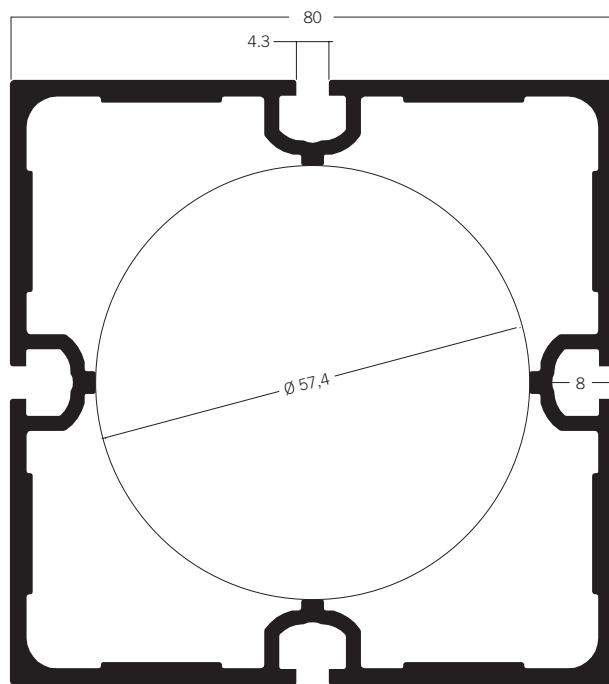

U 1020 Square extrusion 80 mm
15.50 kg | 6000 mm


UPRIGHTS AND BEAMS

Square Extrusions

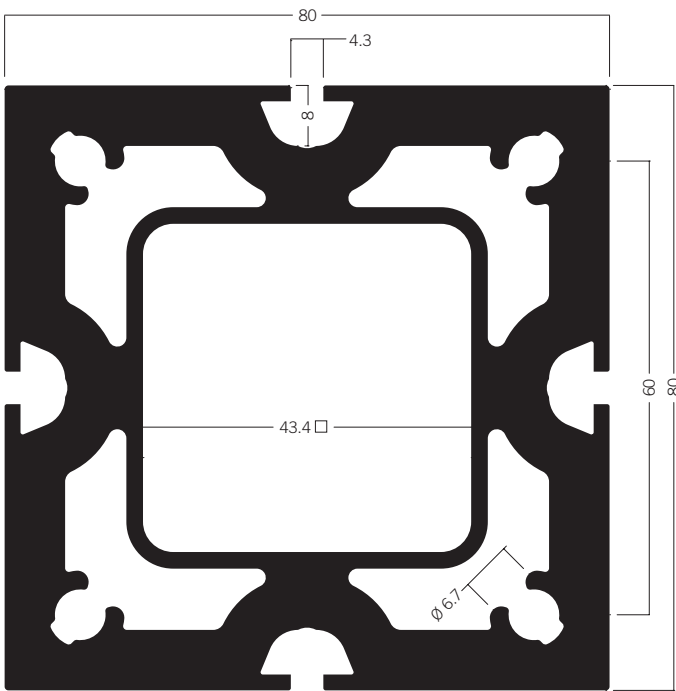


DFS 84 Upright extrusion 80 mm
38.95 kg | 5040 mm


DFS 84/6000 Upright extrusion 80 mm
46.28 kg | 6000 mm

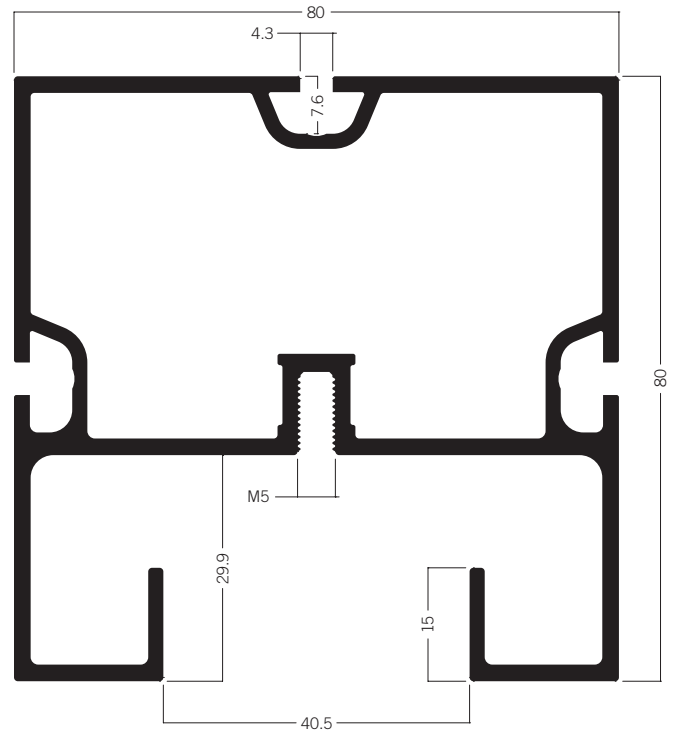


M 1059 Light track mounting extrusion 80 mm
15.92 kg | 6000 mm

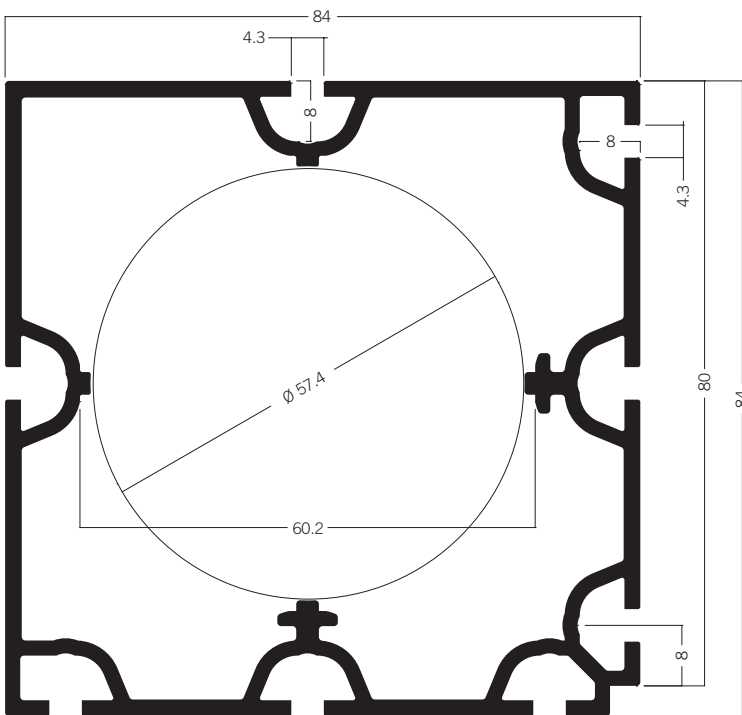

M 1017 Square extrusion 84 mm
12.05 kg | 5000 mm

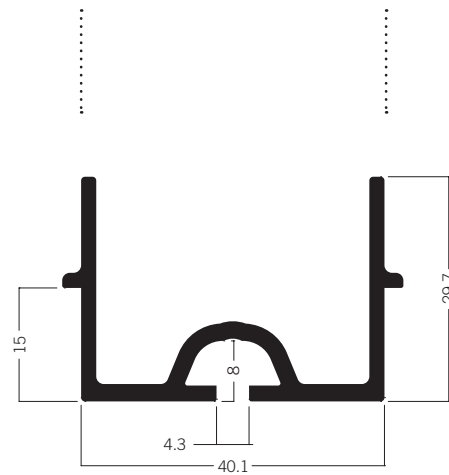

M 1155 Cover extrusion for M 1059
3.46 kg | 5000 mm

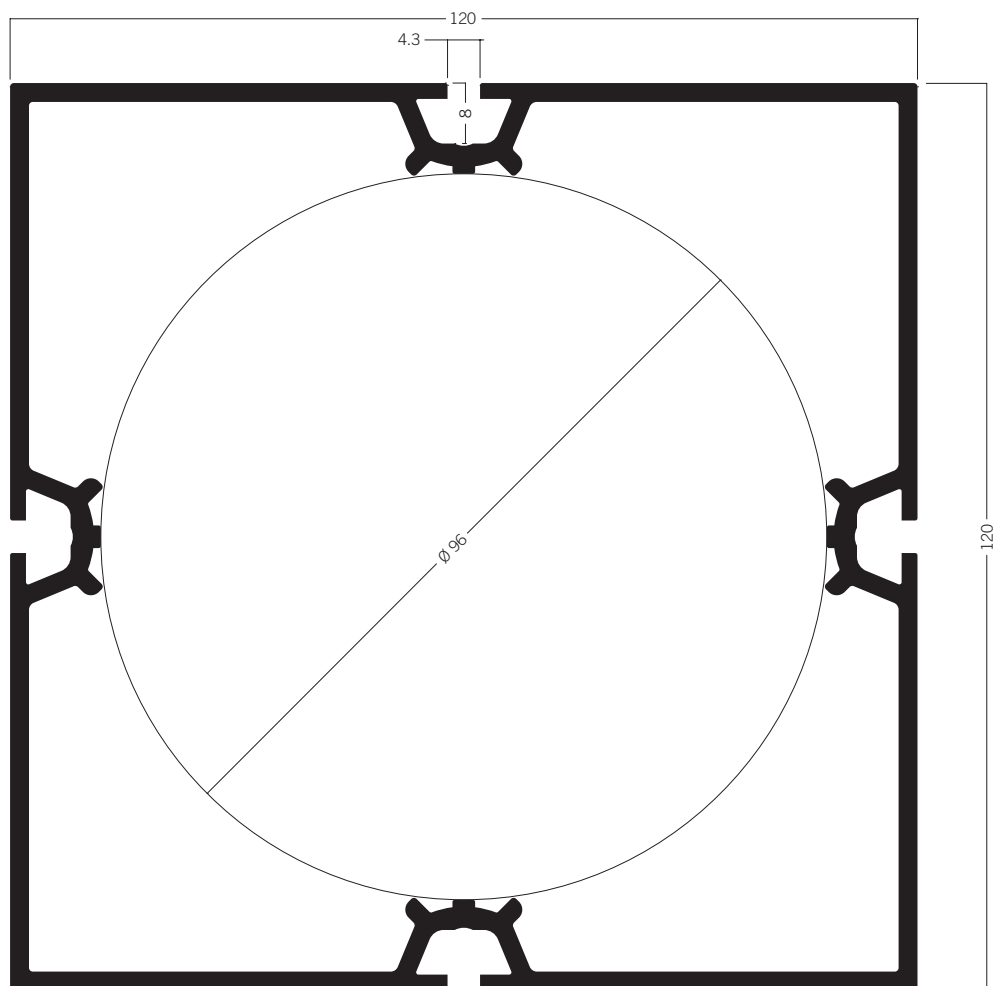


M 225 Square extrusion 120 mm
19.81 kg | 5000 mm

M 226 Square extrusion 120 mm
22.71 kg | 6000 mm


UPRIGHTS AND BEAMS

Square Extrusions

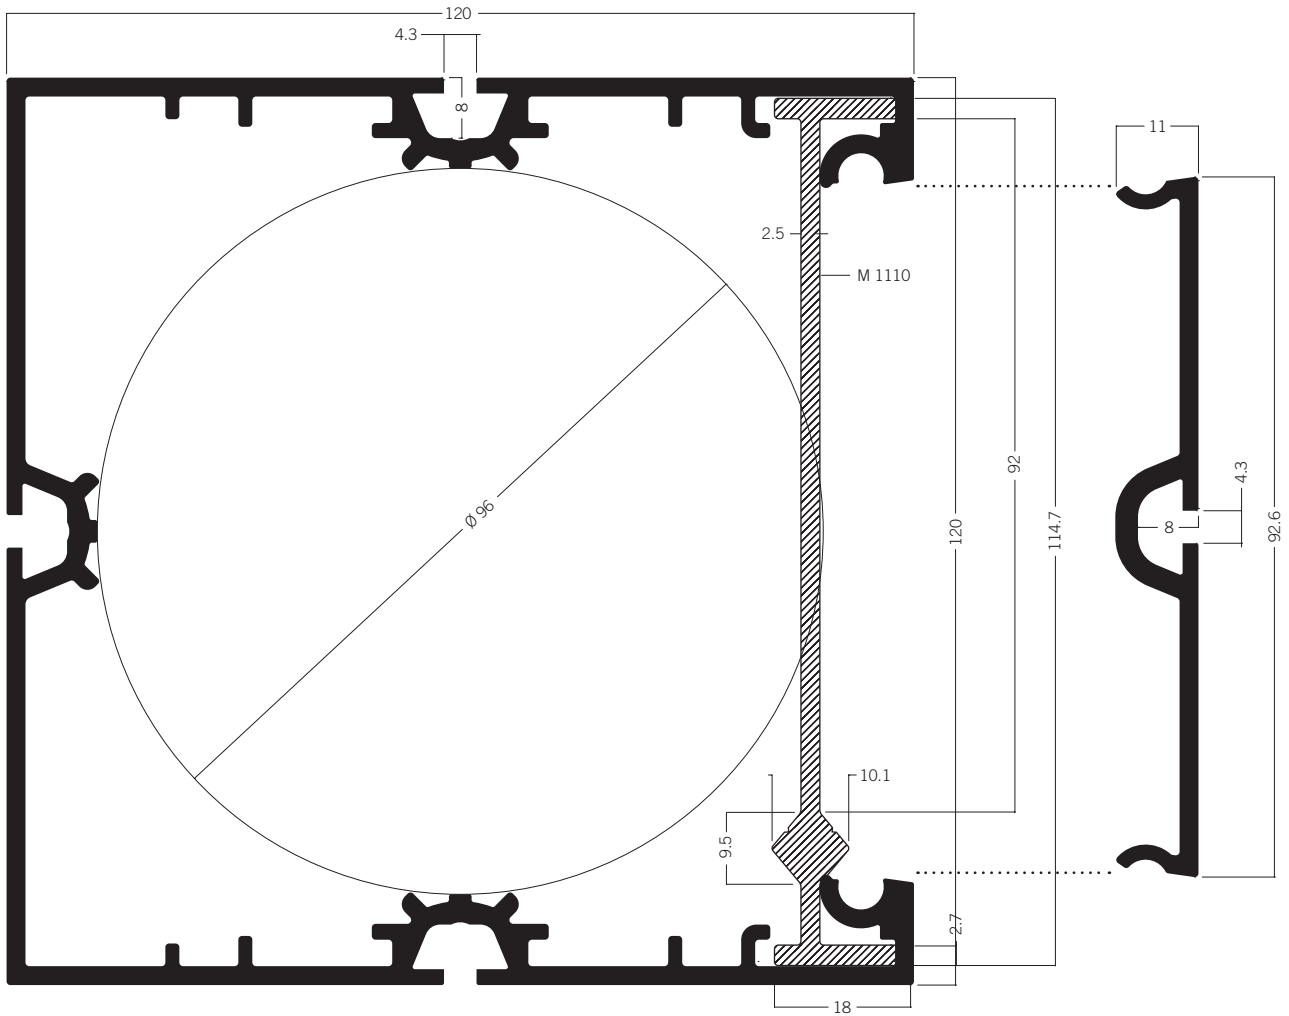


M 1041 Square extrusion open 120 mm
21.85 kg | 6000 mm


M 1046 Cover extrusion
5.30 kg | 6000 mm




W 416 Insert extrusion 16 mm
1.05 kg | 5000 mm

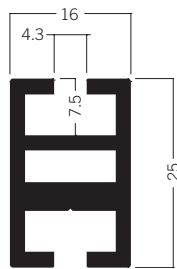


M 1602 Beam extrusion 25 mm
2.72 kg | 5000 mm




M 1603* Beam extrusion 25 mm
2.74 kg | 5000 mm




Z 305 Beam extrusion 25 mm
1.72 kg | 5000 mm




V 2040 Upright extrusion 25 mm
2.41 kg | 5000 mm




Z 300 Beam extrusion 25 mm
2.05 kg | 5000 mm

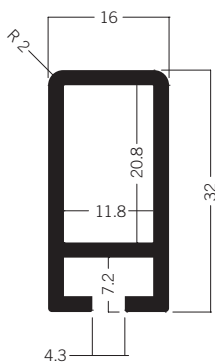

Z 303 Beam extrusion 32 mm
2.70 kg | 5000 mm

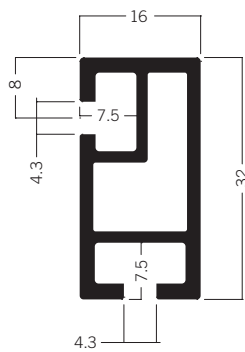


Z 307 Beam extrusion 32 mm
2.53 kg | 5000 mm

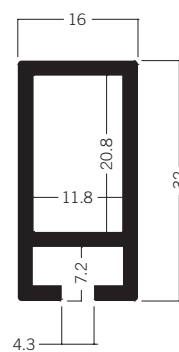


Z 308 Beam extrusion 32 mm
2.68 kg | 5000 mm

UPRIGHTS AND BEAMS


Rectangular Extrusions

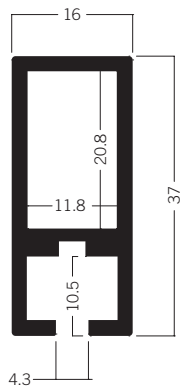


Z 310 Beam extrusion 37 mm
2.96 kg | 5000 mm

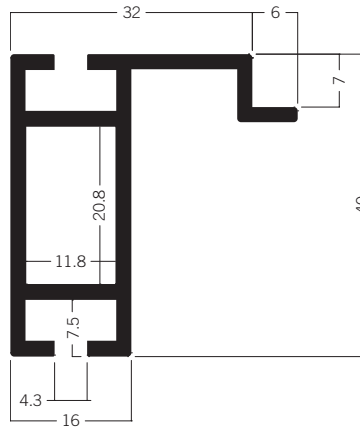


Z 4100 Beam extrusion 40 mm
4.14 kg | 5000 mm

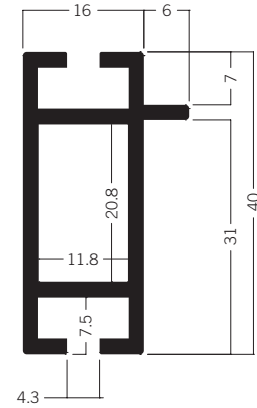


Z 4300 Beam extrusion 40 mm
3.54 kg | 5000 mm

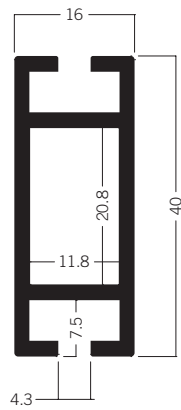

Z 4400 Beam extrusion 40 mm
3.20 kg | 5000 mm

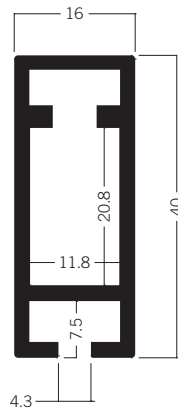


Z 4401 Beam extrusion 40 mm
3.38 kg | 5000 mm

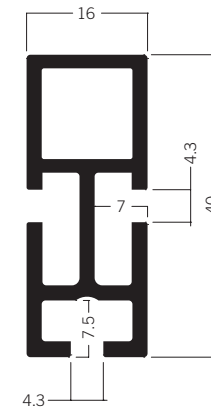


Z 4700 Rectangular extrusion 40 mm
3.49 kg | 5000 mm




Z 100 Beam extrusion 43 mm
3.14 kg | 5000 mm

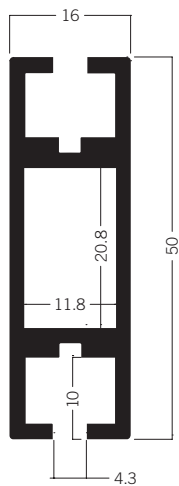


Z 400 Beam extrusion 50 mm
4.39 kg | 5000 mm

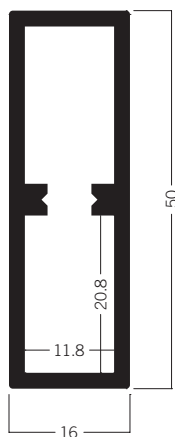


Z 402 Beam extrusion 50 mm
3.76 kg | 5000 mm

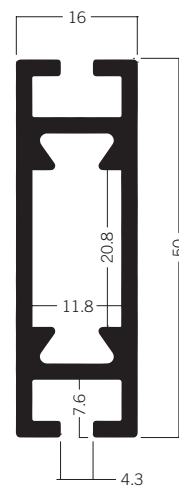

Z 408* Beam extrusion 50 mm
4.39 kg | 5000 mm

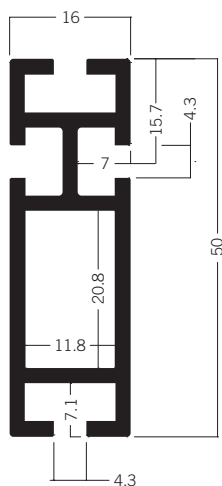


Z 460 Beam extrusion 50 mm
3.96 kg | 5000 mm

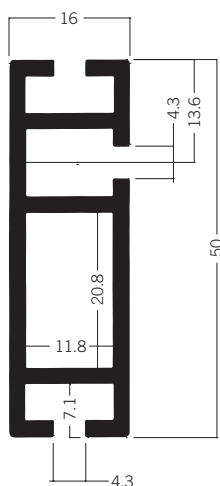


Z 464* Beam extrusion 50 mm
4.11 kg | 5000 mm

UPRIGHTS AND BEAMS


Rectangular Extrusions

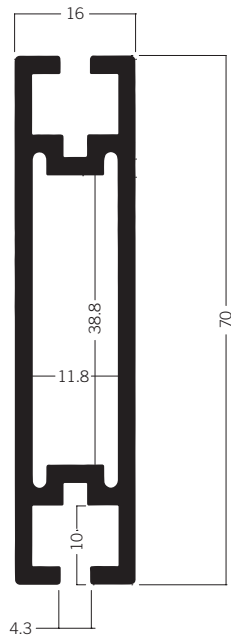


Z 110 Beam extrusion 70 mm
5.42 kg | 5000 mm

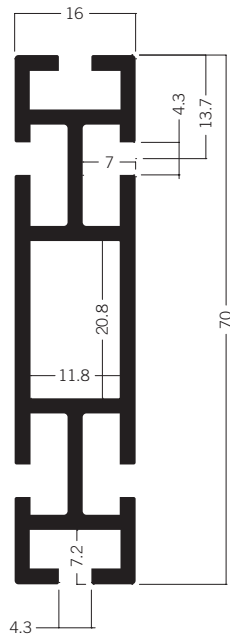


Z 160 Beam extrusion 70 mm
5.43 kg | 5000 mm

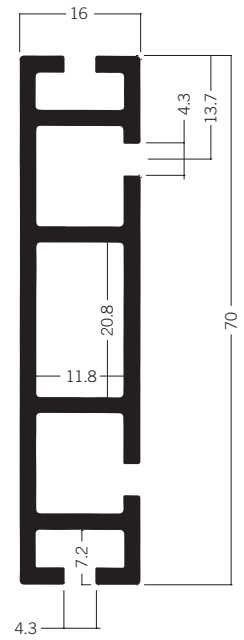


Z 164* Beam extrusion 70 mm
5.85 kg | 5000 mm

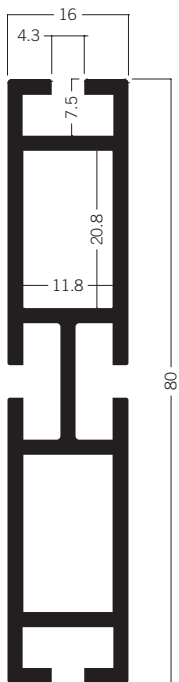


M 1320 Beam extrusion 80 mm
6.45 kg | 5000 mm

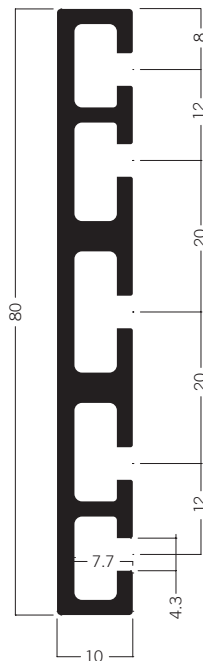


M 1063 Connecting extrusion 80 mm
5.46 kg | 5000 mm

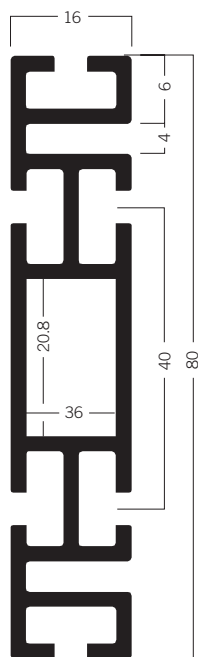

U 1066 Fabric suspension-spacing extrusion
80 × 16 mm
8.25 kg | 6000 mm

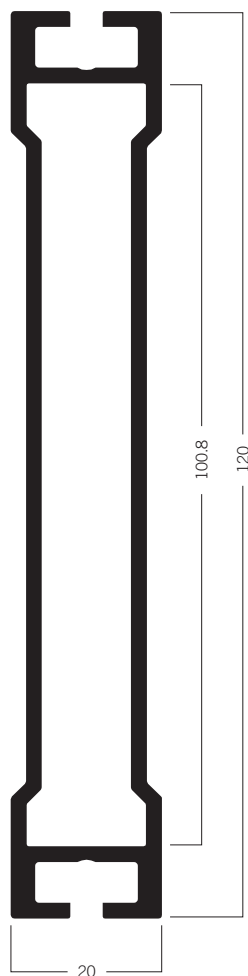


U 1030* Beam extrusion
120 mm
9.51 kg | 6000 mm

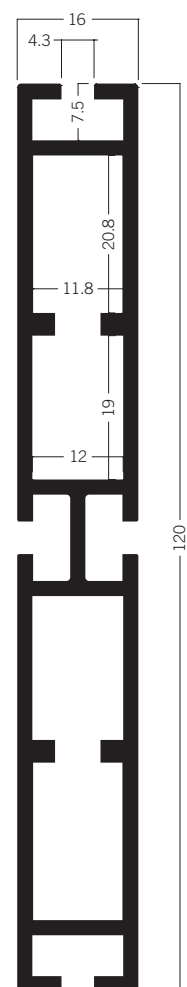


M 1340 Beam extrusion
120 mm
9.00 kg | 5000 mm

UPRIGHTS AND BEAMS


Rectangular Extrusions

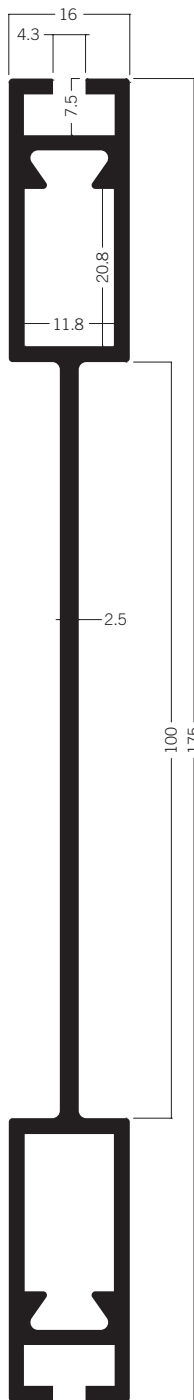

Z 508 Beam extrusion
175 mm
9.95 kg | 5000 mm

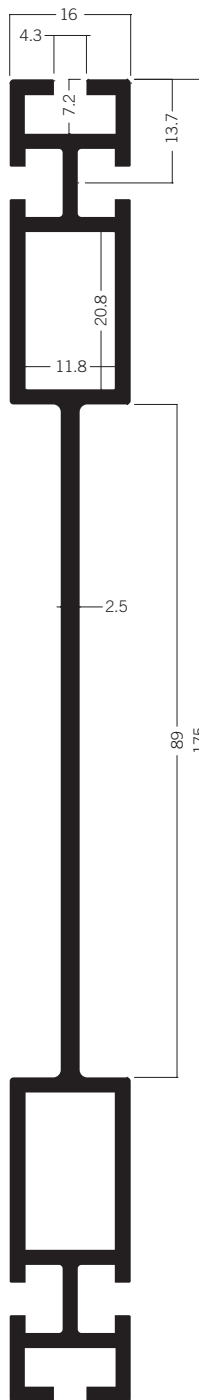


Z 560 Beam extrusion
175 mm
10.32 kg | 5000 mm

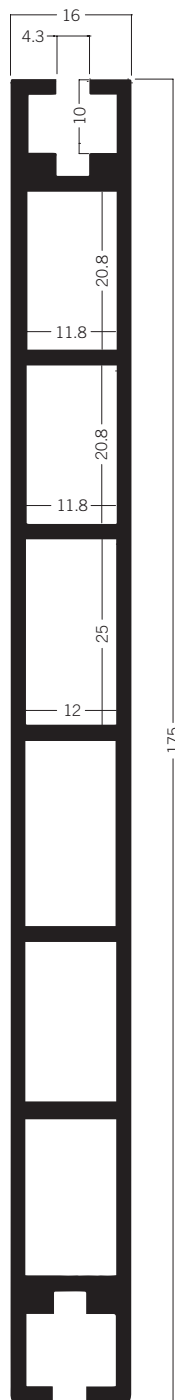


Z 600 Beam extrusion
175 mm
13.53 kg | 5000 mm


■ *Discontinued item, only while stocks last

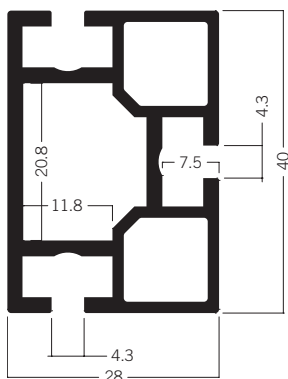


M 1069 Rectangular extrusion 40 mm
5.71 kg | 6000 mm

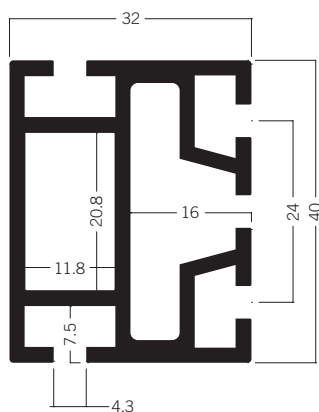

Z 2100 Beam extrusion 40 mm
5.99 kg | 5000 mm

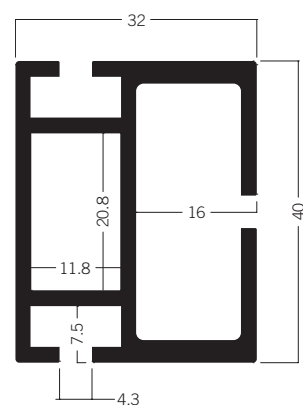


Z 2105 Beam extrusion 40 mm
5.56 kg | 5000 mm

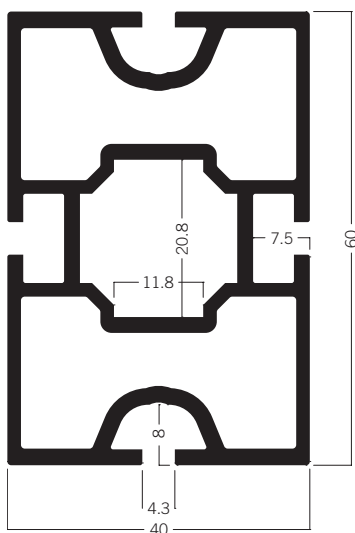


M 1081 Rectangular extrusion 60 mm
8.94 kg | 5000 mm

M 1082 Rectangular extrusion 60 mm
10.73 kg | 6000 mm

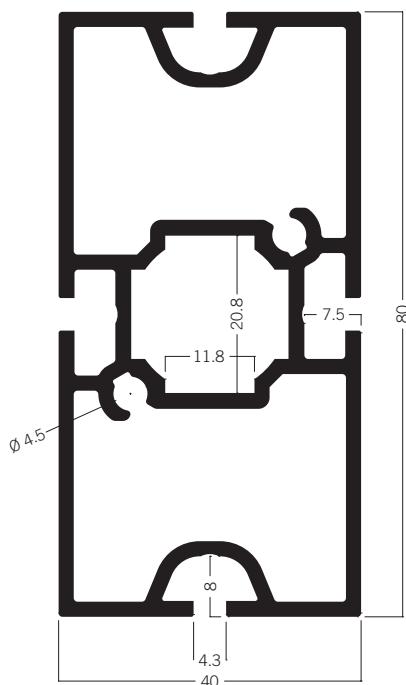

M 1025 Rectangular extrusion 80 mm
10.22 kg | 5000 mm


M 1026 Rectangular extrusion 80 mm
12.70 kg | 6000 mm

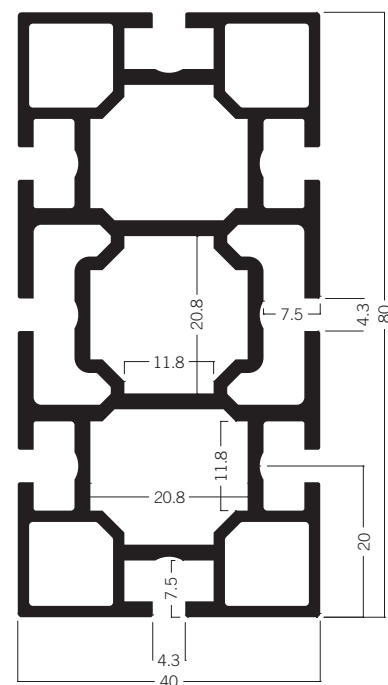


M 1092 Rectangular extrusion 80 mm
14.60 kg | 6000 mm

UPRIGHTS AND BEAMS


Rectangular Extrusions

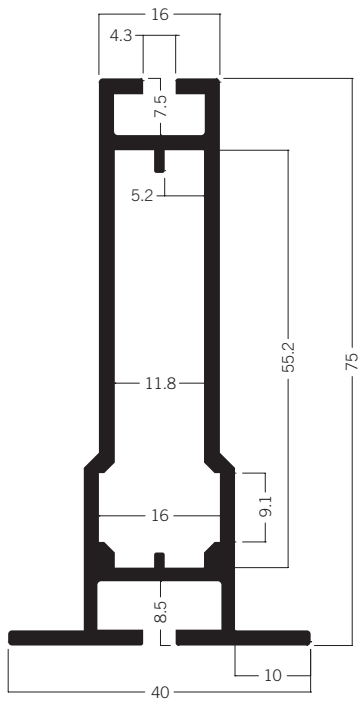


W 901* Frame extrusion 40 mm Panel
7.51 kg | 6000 mm

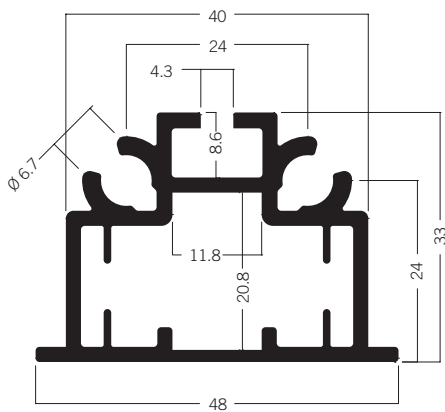


S 1610* Frame extrusion 48 mm
6.48 kg | 6000 mm

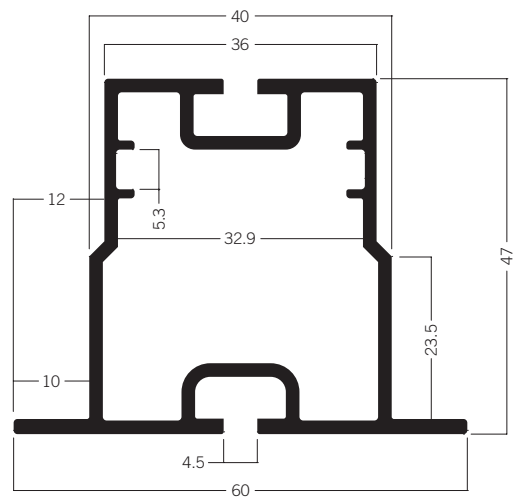


W 825* Frame extrusion 60 mm Panel (USA)
7.20 kg | 5000 mm

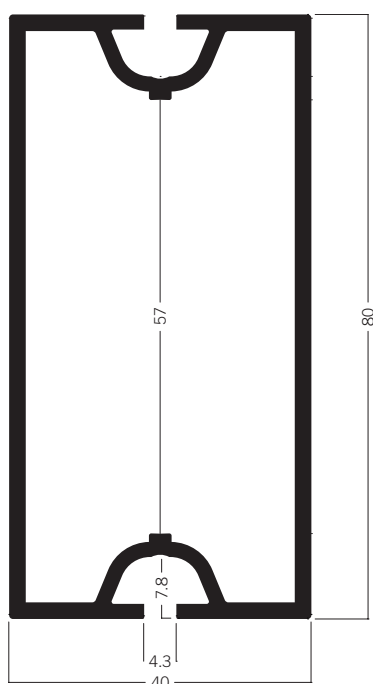

M 1043* Rectangular extrusion 80 mm
5.61 kg | 5000 mm


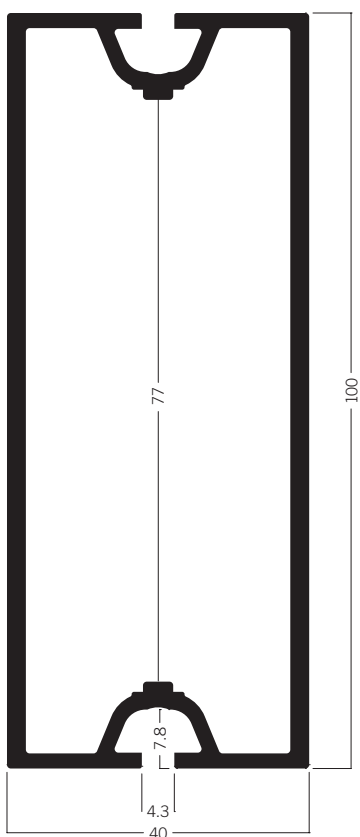



M 1029 Rectangular extrusion 100 mm
11.88 kg | 6000 mm

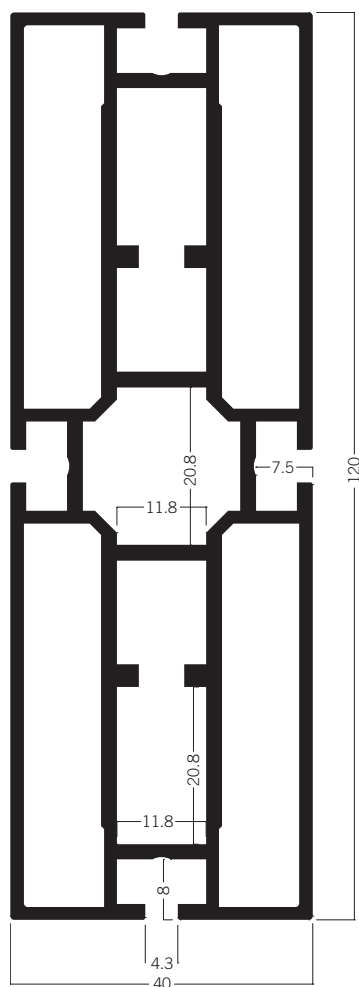


M 1031 Rectangular extrusion 120 mm
18.07 kg | 6000 mm

Rectangular Extrusions




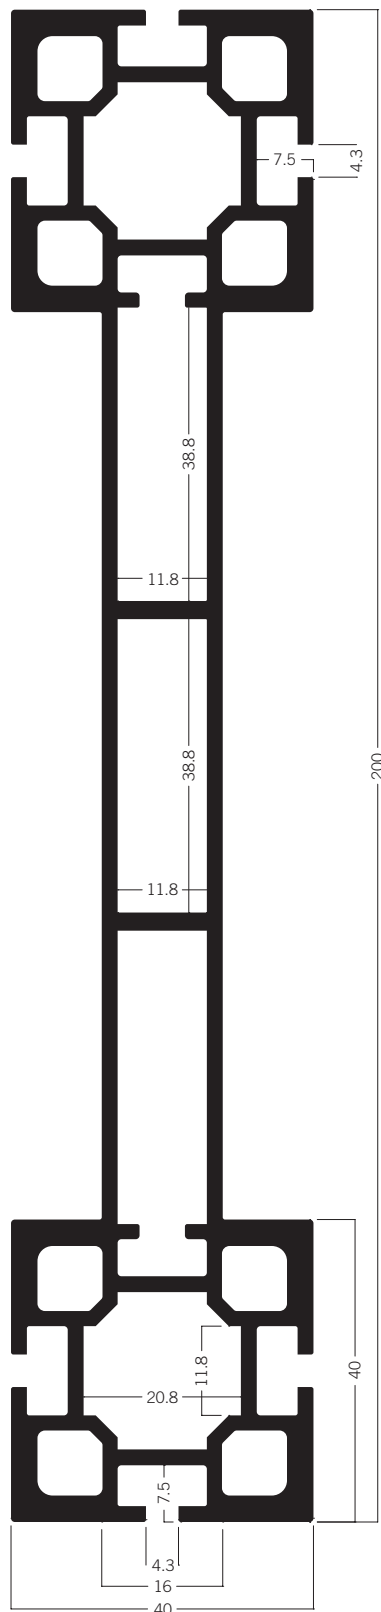



M 770 Beam extrusion 200 mm
35.53 kg | 7000 mm

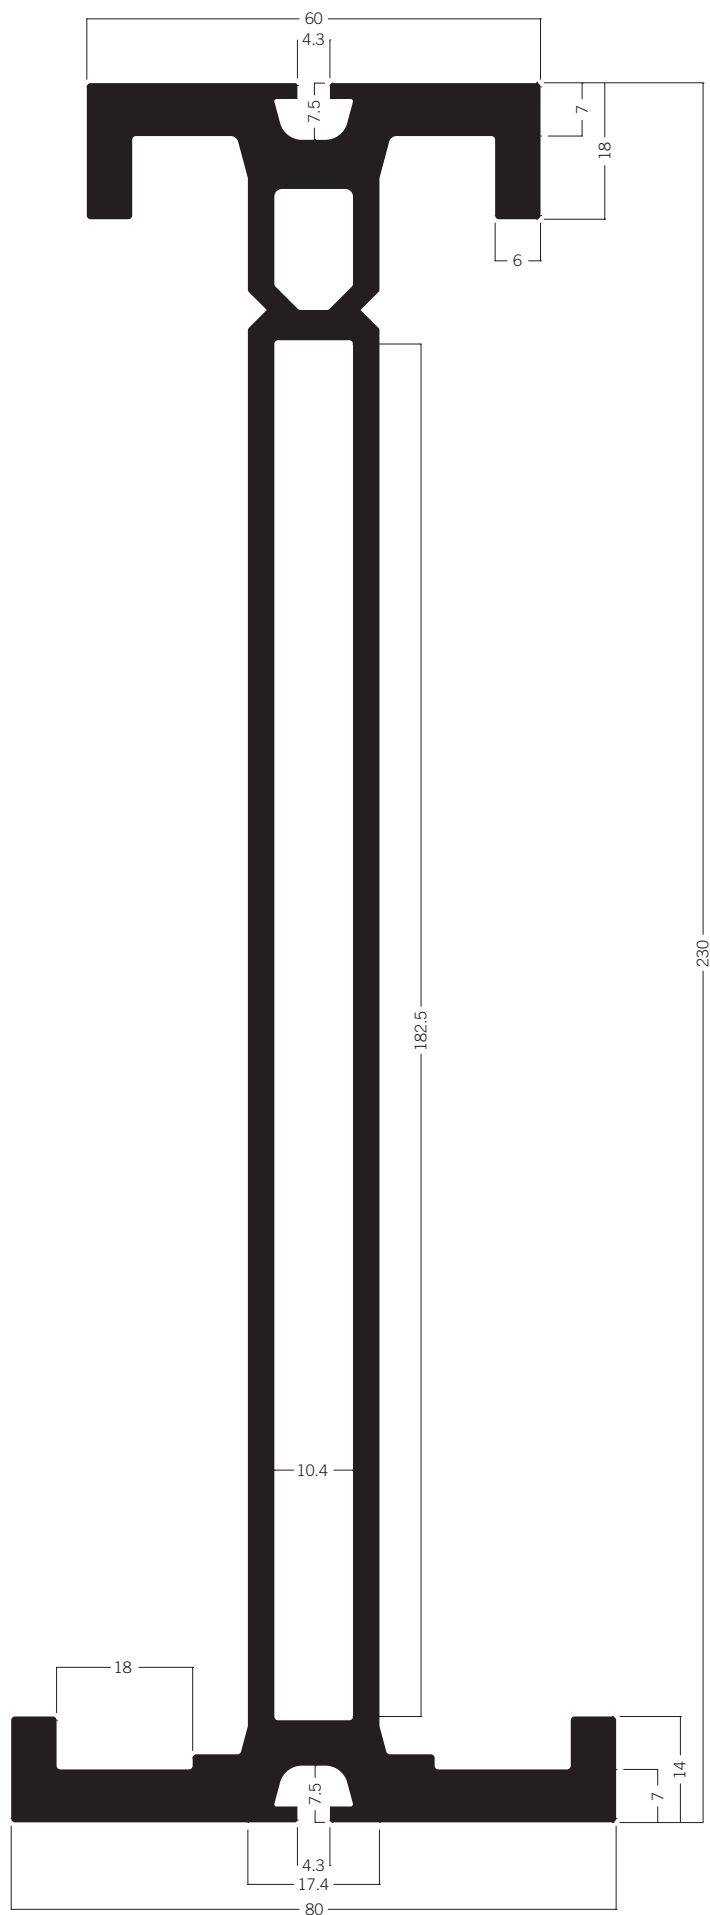


DFL 230 Beam extrusion 230 mm
53.24 kg | 7000 mm

Rectangular Extrusions




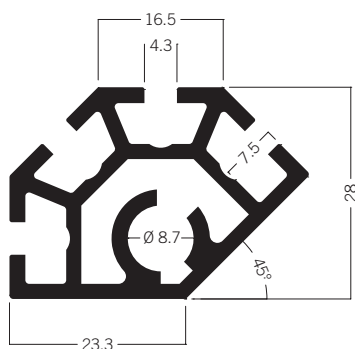


S 203 Upright extrusion 135°
4.87 kg | 5000 mm

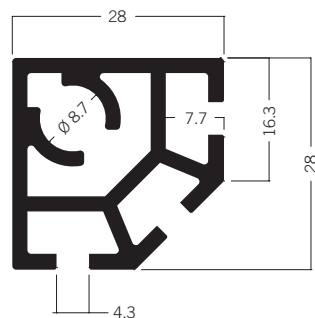


S 308 Upright extrusion 28 m
4.14 kg | 5000 mm

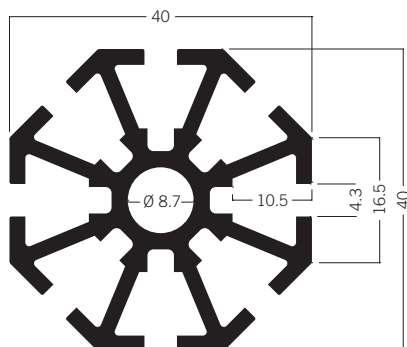


S 100 Upright extrusion 40 mm
6.80 kg | 5000 mm

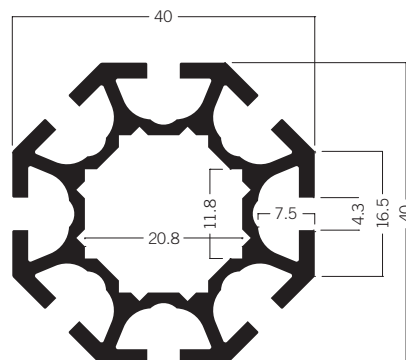

S 108 Upright extrusion 40 mm
5.35 kg | 5000 mm

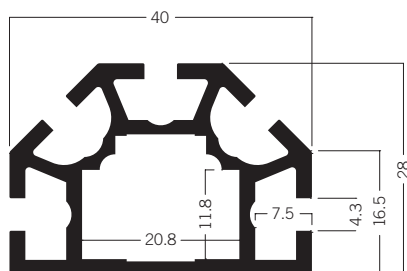


S 201 Upright extrusion 40 mm
4.25 kg | 5000 mm

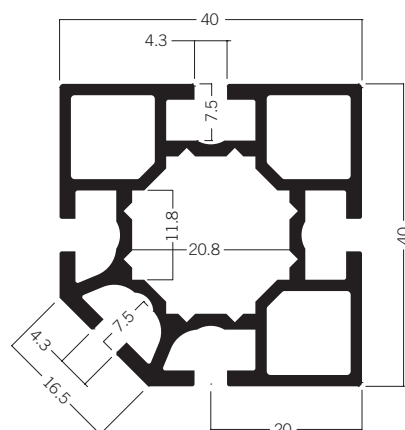


S 380 Upright extrusion 40 mm
5.97 kg | 5000 mm

UPRIGHTS AND BEAMS


Octagonal Extrusions

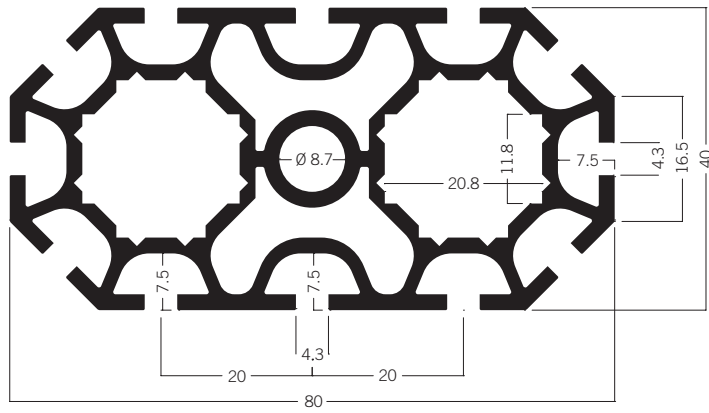


S 408 Upright extrusion 80 mm
12.64 kg | 5000 mm




S 206 Interior corner extrusion 45°
1.41 kg | 5000 mm



M 1622 Triangular extrusion 22 mm
1.77 kg | 5000 mm

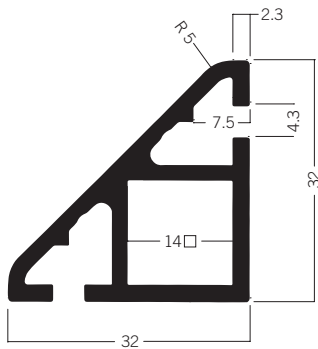


S 1302* Triangular extrusion 32 mm
3.20 kg | 5000 mm

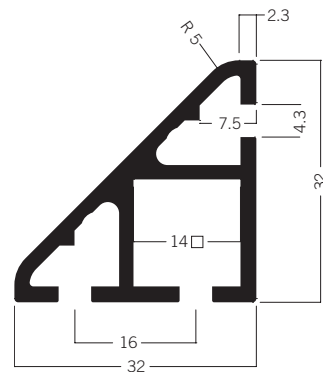


S 1303 Triangular extrusion 32 mm
3.19 kg | 5000 mm

UPRIGHTS AND BEAMS


Triangular Extrusions

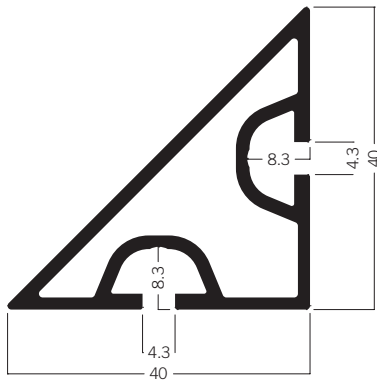


M 1072 Triangular extrusion 40 mm
4.85 kg | 6000 mm

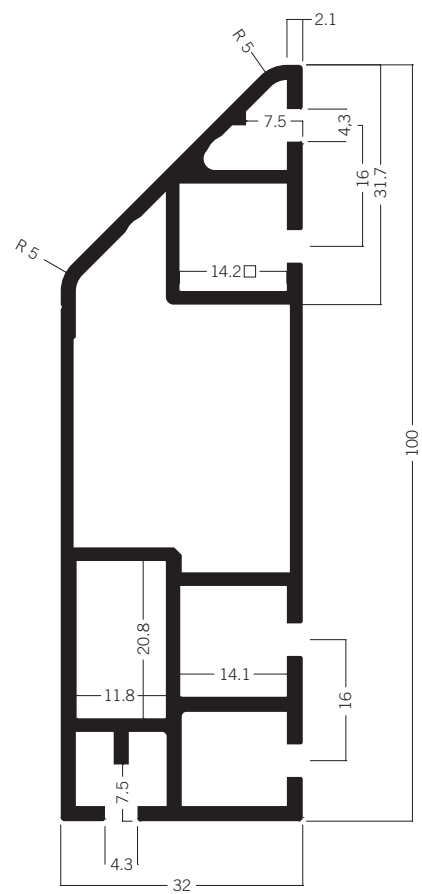


S 1310 Triangular extrusion 100 mm
9.28 kg | 5000 mm




M 1629 Exterior corner extrusion 135°
2.15 kg | 5000 mm



V 2020* Exterior corner extrusion 135°
2.63 kg | 5000 mm

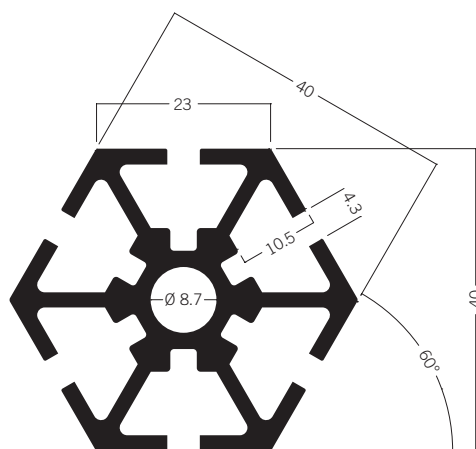


S 500 Upright extrusion 60°
6.98 kg | 5000 mm

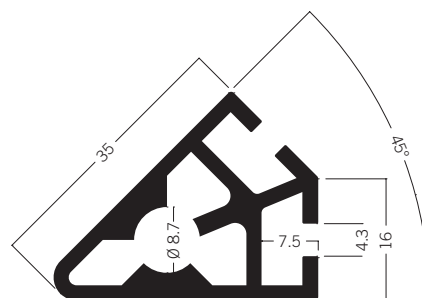


S 302 Upright extrusion 45°
4.03 kg | 5000 mm

UPRIGHTS AND BEAMS


Corner Extrusions

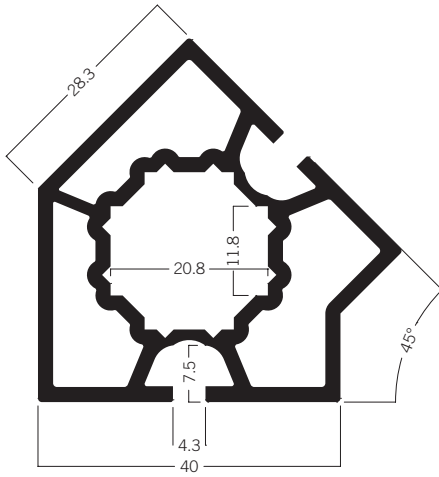


M 1009 Exterior corner extrusion 135°
7.82 kg | 6000 mm

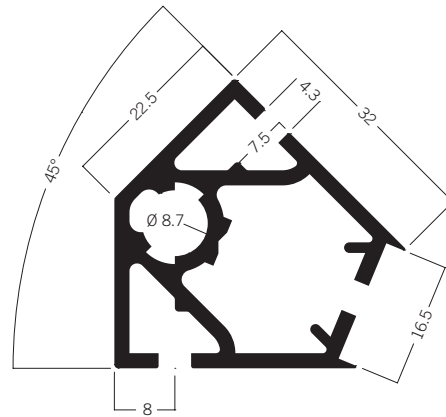


S 1129 Exterior corner extrusion 135°
4.74 kg | 5000 mm

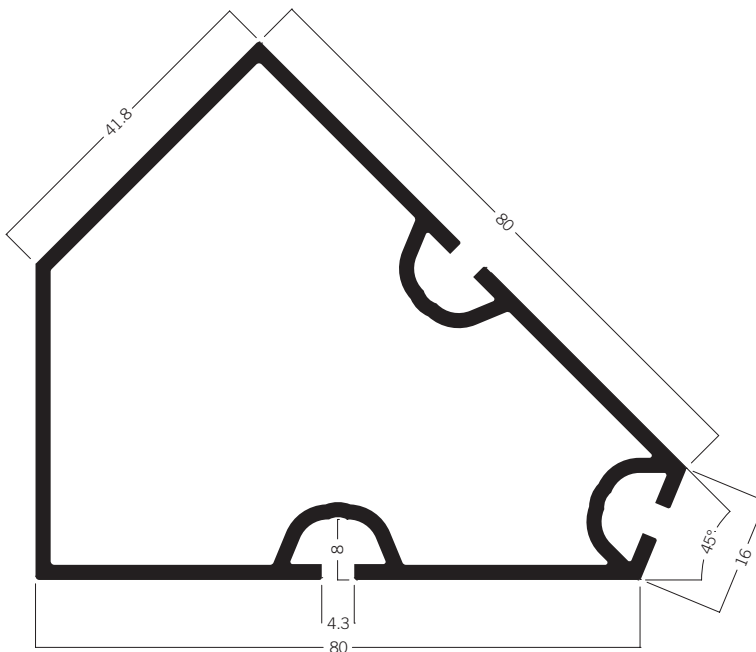


M 1070 Exterior corner extrusion 135°
8.38 kg | 5000 mm

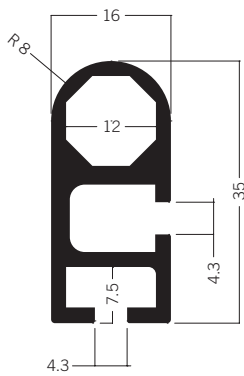


S 250 Hinged extrusion 35 mm
3.14 kg | 5000 mm




S 251 Hinged extrusion 24 mm
2.24 kg | 5000 mm




S 252 Hinged extrusion 16 mm
1.73 kg | 5000 mm

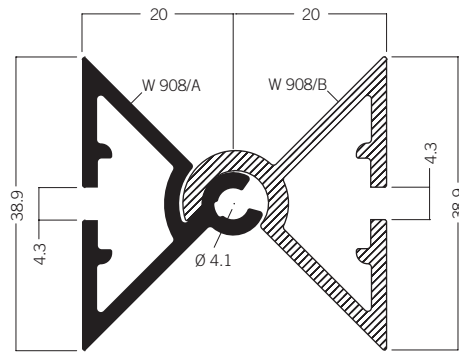


W 908 Hinged extrusion
5.60 kg | 5000 mm




M 1600* Quarter-round extrusion
2.00 kg | 5000 mm




M 1620 Quarter-round extrusion
1.80 kg | 5000 mm




S 1100 Quarter-round extrusion
4.06 kg | 5000 mm



S 1105 Quarter-round extrusion
4.02 kg | 5000 mm

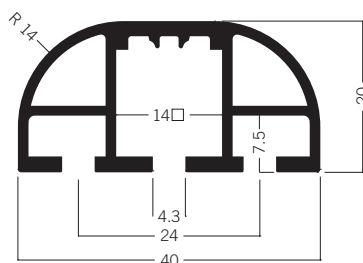


M 1606 Semi-circular extrusion
3.04 kg | 5000 mm

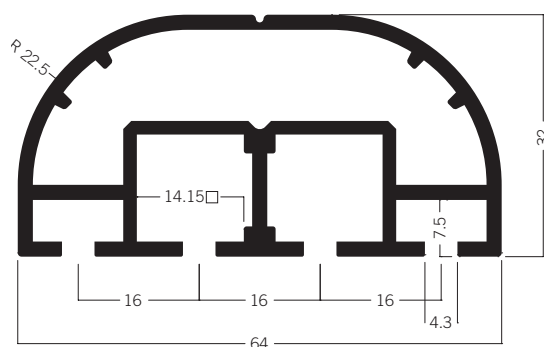


S 1106 Semi-circular extrusion
6.98 kg | 5000 mm




M 1460 Round extrusion 16 mm
2.57 kg | 6000 mm

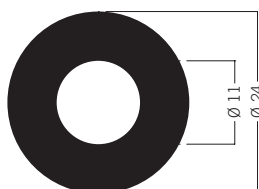


M 1140 Round extrusion 24 mm
4.69 kg | 5000 mm




M 1208 Round extrusion 26.3 mm
2.17 kg | 5000 mm

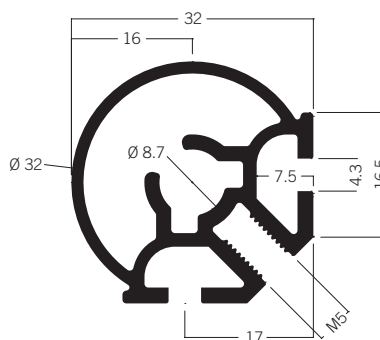

S 1200 Quarter-round extrusion
3.78 kg | 5000 mm

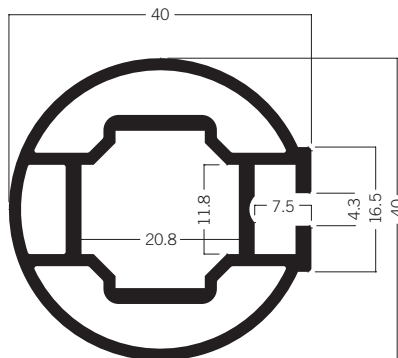

M 1201* Round extrusion 40 mm
5.25 kg | 5000 mm

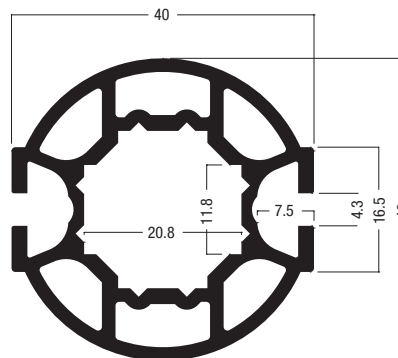


M 1202 Round extrusion 40 mm
6.10 kg | 5000 mm


Round Extrusions



M 260 Upright extrusion 90°
25.50 kg | 6060 mm

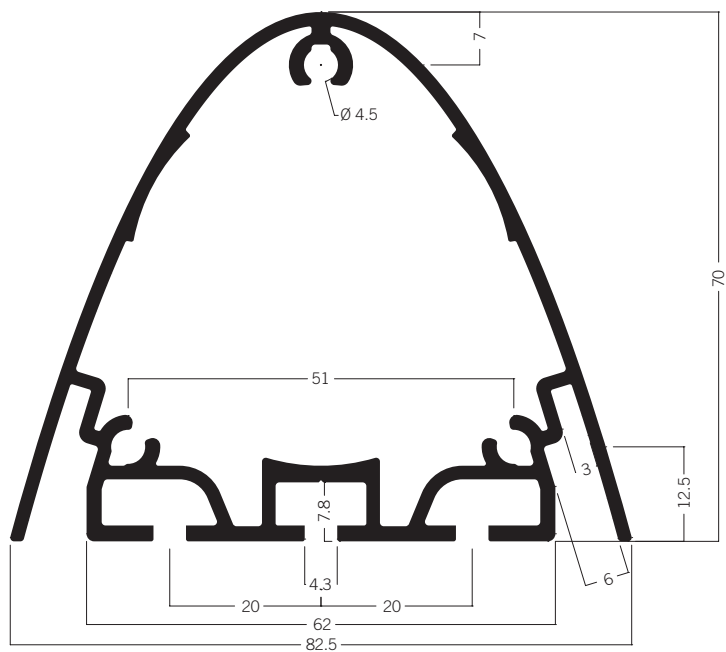


S 3050 Oval extrusion
11.34 kg | 6000 mm

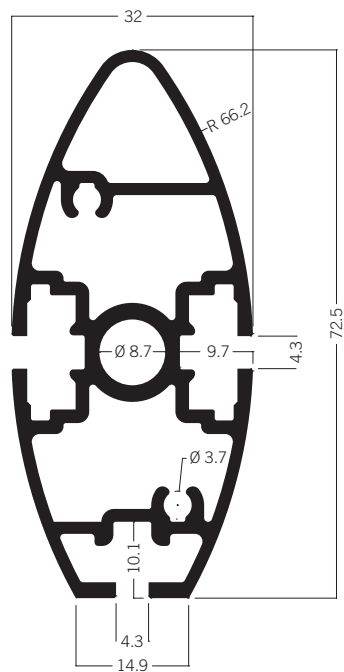


S 6105 Oval extrusion 32 × 72.5 mm
7.65 kg | 5000 mm

UPRIGHTS AND BEAMS

Oval Extrusions

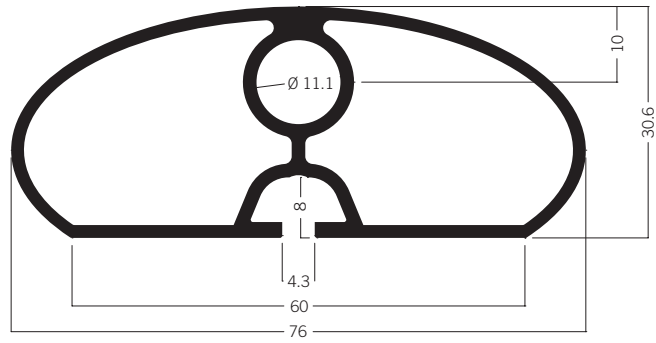


DFL 400 Handrail extrusion
6.96 kg | 6000 mm

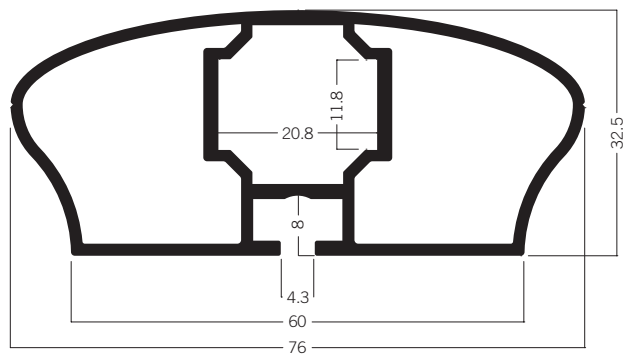


DFL 400A* Handrail extrusion
7.12 kg | 6000 mm

FABRIC MOUN TING




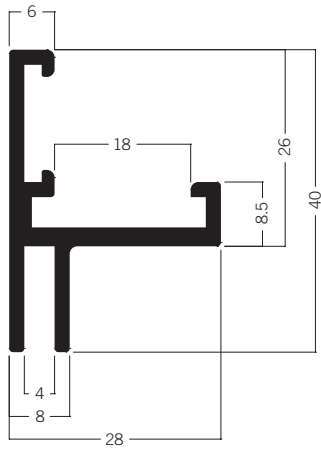


M 1302 Tension fabric extrusion 40 mm
3.49 kg | 6000 mm




M 1312 U-channel extrusion
1.56 kg | 6000 mm

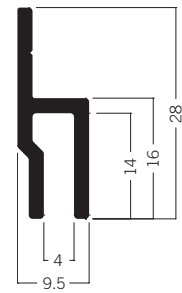


M 1614 Tension fabric extrusion 28 mm
1.54 kg | 6000 mm




M 1309 Tension fabric extrusion 22.5 mm
2.53 kg | 6000 mm

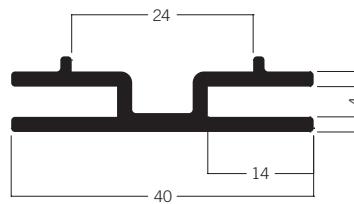

M 1310 Tension fabric extrusion 40 mm
2.69 kg | 6000 mm




M 1607 Tension fabric extrusion 16 mm
1.91 kg | 6000 mm

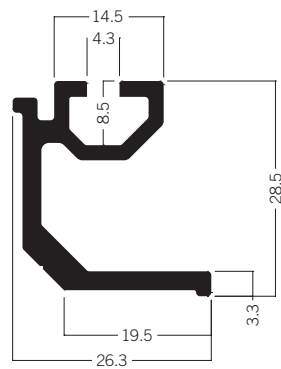


M 1326 Connection extrusion, cube
3.27 kg | 6000 mm

FABRIC MOUNTING


Tension Fabric Extrusions




M 1322 Tension fabric extrusion 20 mm
2.03 kg | 6000 mm

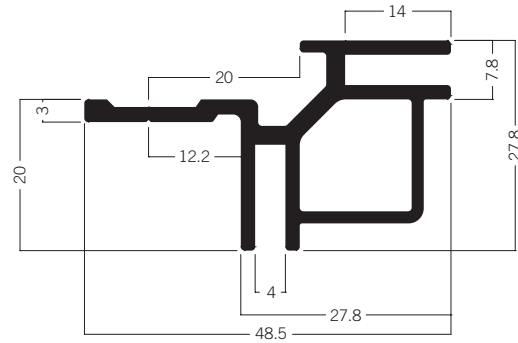


M 1322/E Tension fabric extrusion, external corner
4.42 kg | 6000 mm

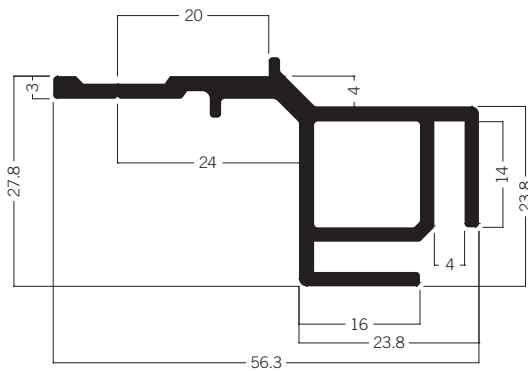


M 1322/I Tension fabric extrusion, internal corner
4.61 kg | 6000 mm

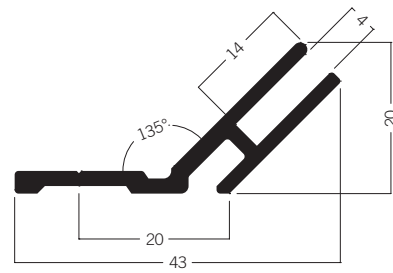


M 1321 Tension fabric extrusion 135°
2.29 kg | 6000 mm

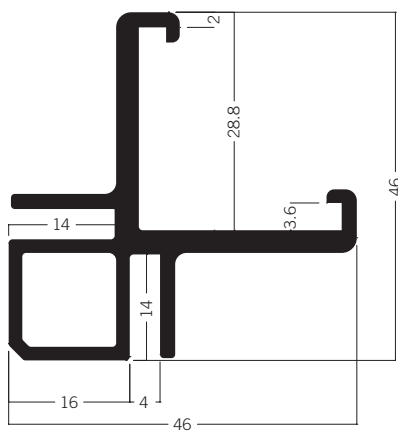


M 1332 Tension fabric extrusion, cube
5.94 kg | 6000 mm

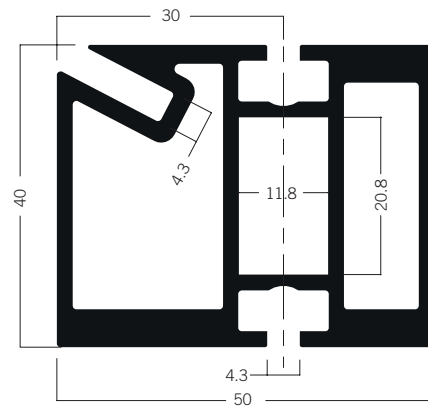


CO 730* Tension fabric extrusion
11.75 kg | 6100 mm

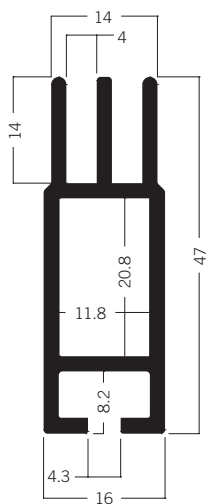


M 1504 Tension fabric extrusion, cube
4.57 kg | 6000 mm

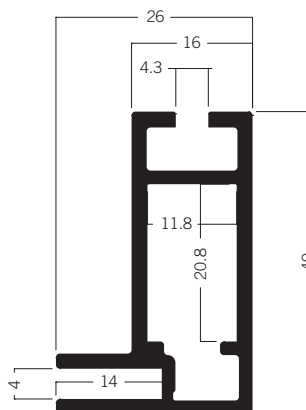


M 1306 Tension fabric extrusion 40 mm
4.55 kg | 6000 mm

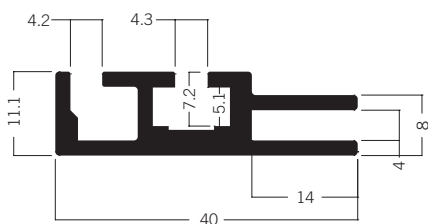


M 1930 Tension fabric extrusion for light frame 40 mm
3.41 kg | 6000 mm

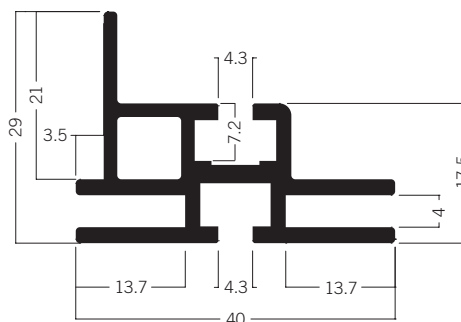

M 1970 Tension fabric extrusion for light frame 40 mm
4.34 kg | 6000 mm

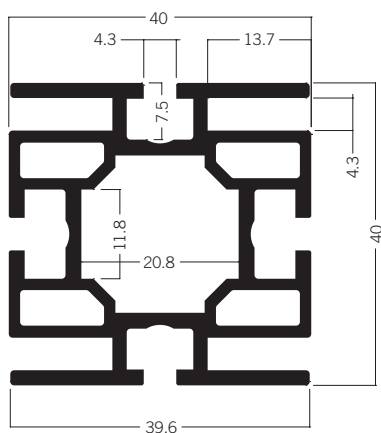


M 1305 Tension fabric extrusion 40 mm
8.23 kg | 6000 mm

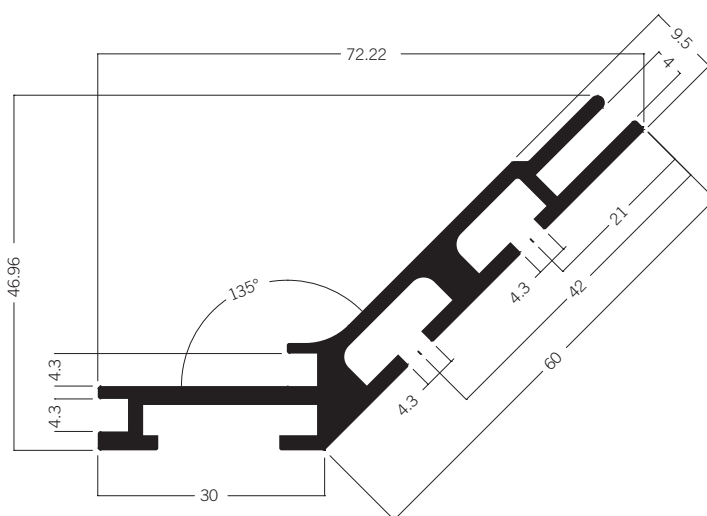


M 1301 Tension fabric extrusion 135°
6.55 kg | 6000 mm

FABRIC MOUNTING


Tension Fabric Extrusions

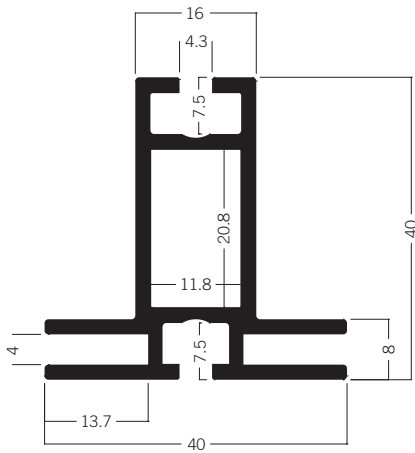


M 1307 Tension fabric extrusion 40 mm
5.39 kg | 6000 mm

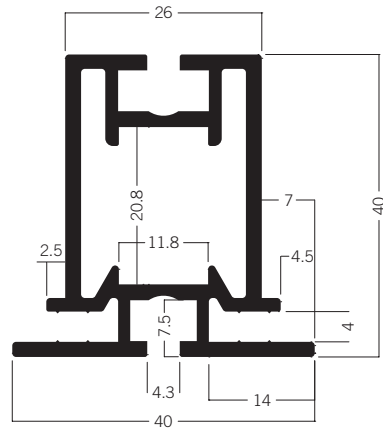


W 906 Tension fabric extrusion 40 mm
6.35 kg | 6000 mm

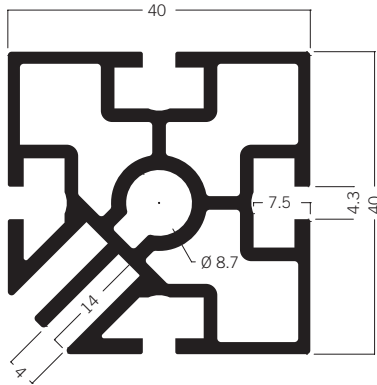


S 382 Upright extrusion 90°, with silicone edge groove
6.91 kg | 5000 mm

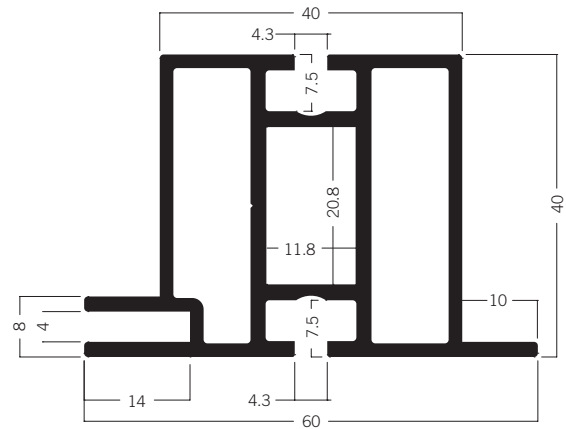


W 730 Tension fabric extrusion 60 mm
8.66 kg | 6000 mm

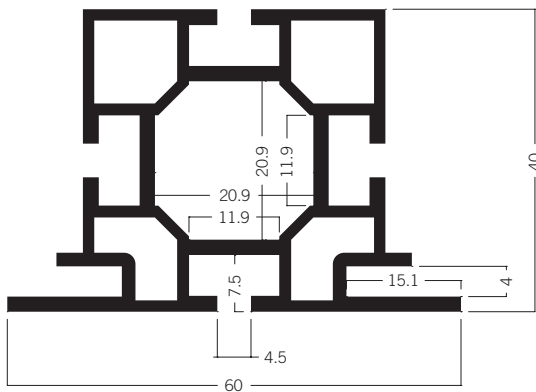


W 735R* Frame extrusion 60 mm universal (USA)
9.20 kg | 6150 mm

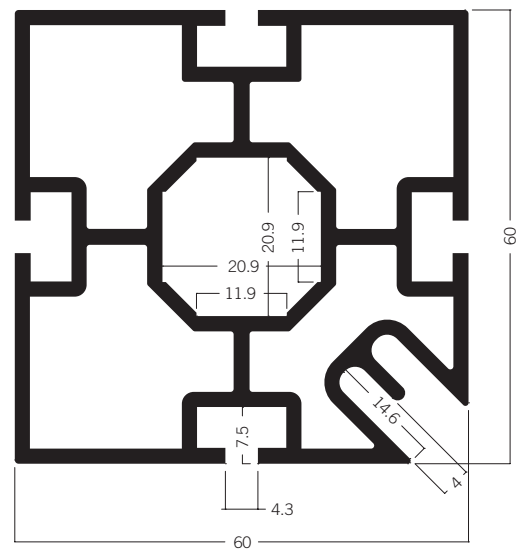


S 385R* upright extrusion, with silicone edge groove (USA)
14.01 kg | 6150 mm

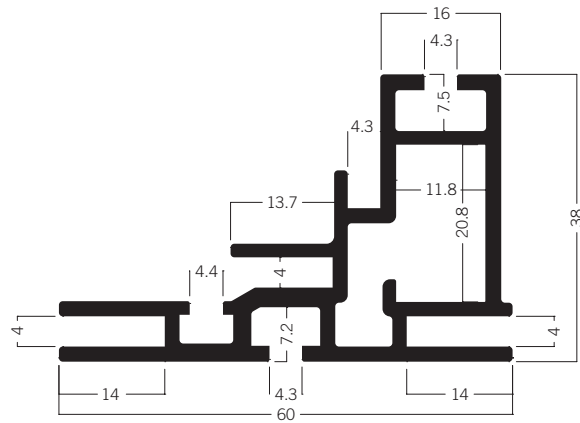

M 1910 Tension fabric extrusion for light frame 60 mm
7.62 kg | 6000 mm

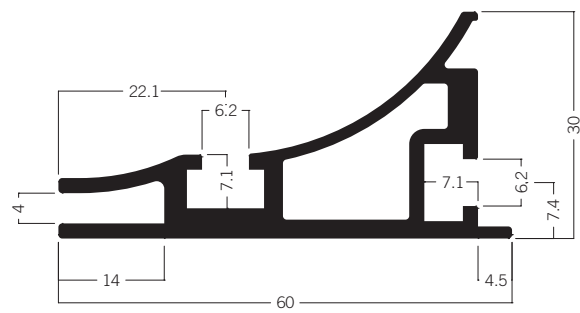


M 1920 Tension fabric extrusion for light frame 60 mm
6.07 kg | 6000 mm

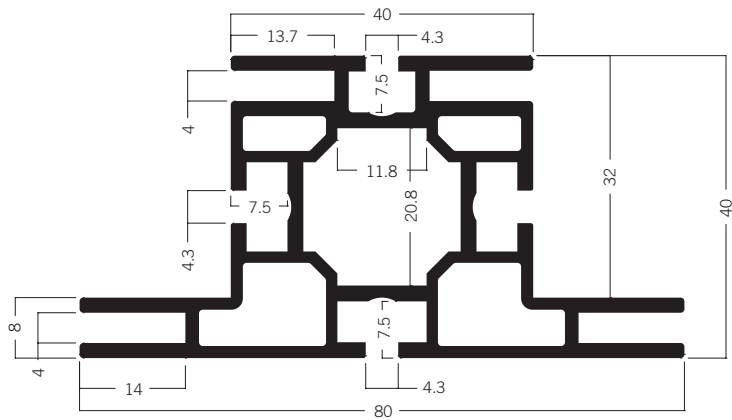


M 1304 Tension fabric extrusion 80 mm
10.15 kg | 6000 mm

FABRIC MOUNTING


Tension Fabric Extrusions

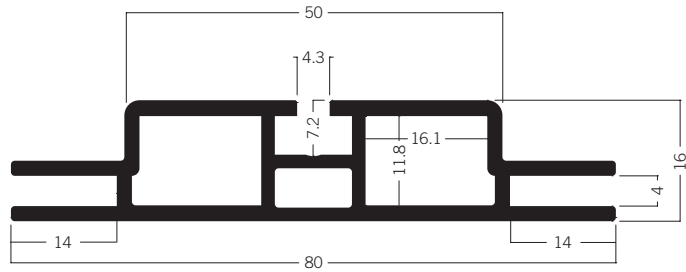


M 1925 Tension fabric extrusion for light frame 80 mm
6.55 kg | 6000 mm

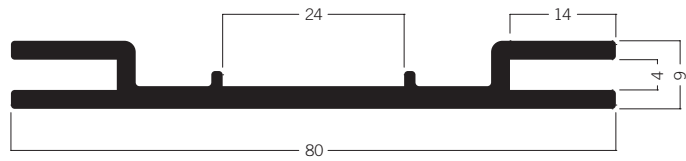


M 1325 Tension fabric extrusion 80 mm
5.33 kg | 6000 mm

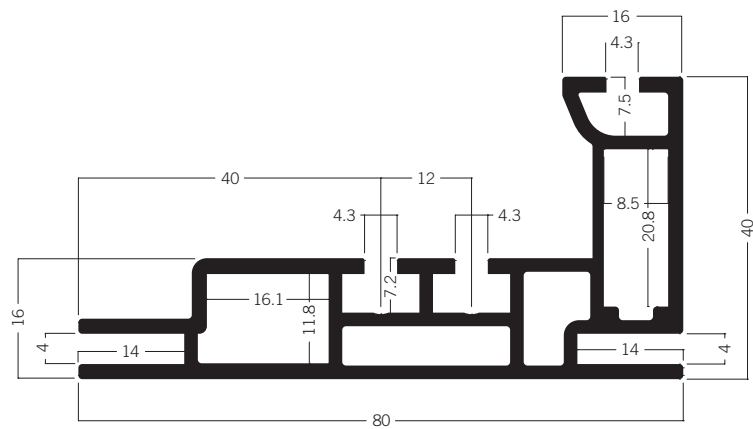

M 1935 Tension fabric extrusion for lightframe 80 mm
9.58 kg | 6000 mm

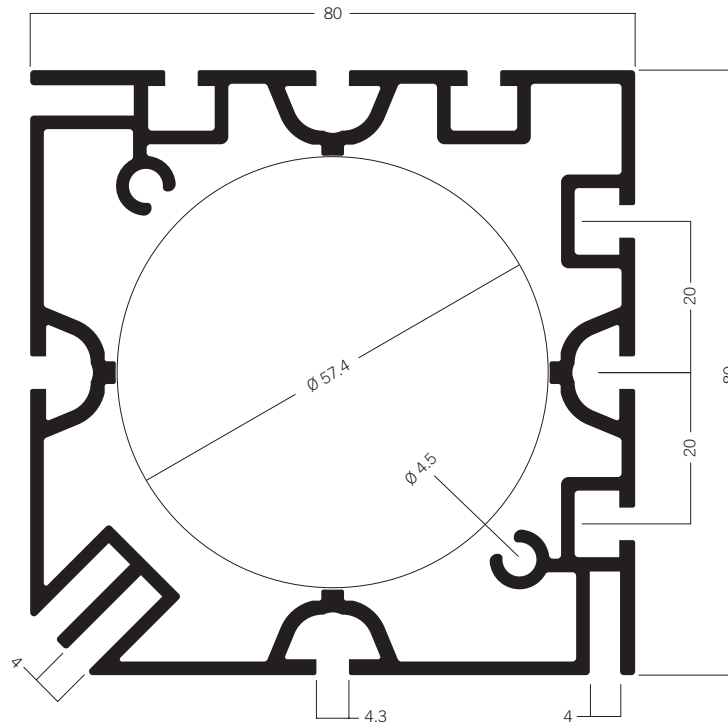


WP 850 Upright extrusion 90°, with silicone edge groove
16.48 kg | 6000 mm

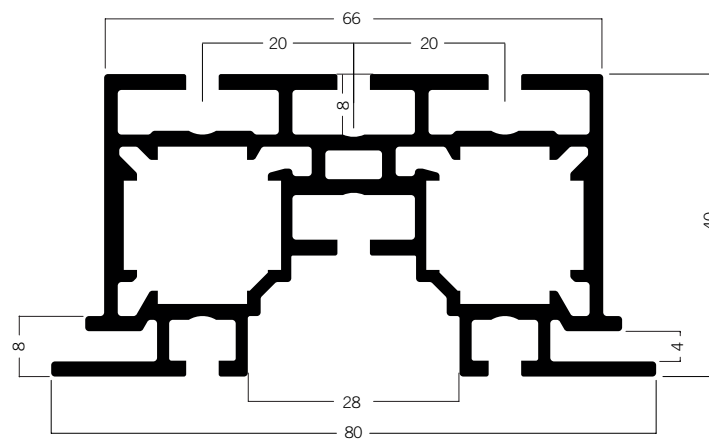


WP 860 Tension fabric extrusion 80 mm
12.99 kg | 6060 mm

FABRIC MOUNTING


Tension Fabric Extrusions

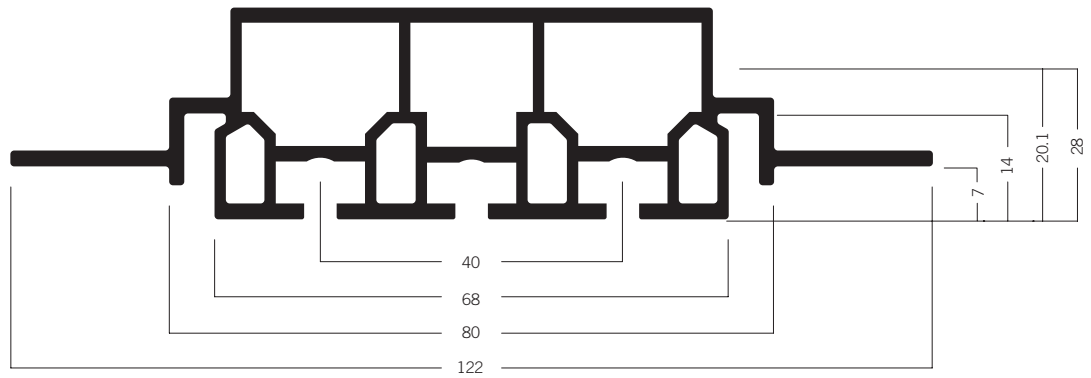


WP 820 T-connection extrusion
11.70 kg | 6060 mm

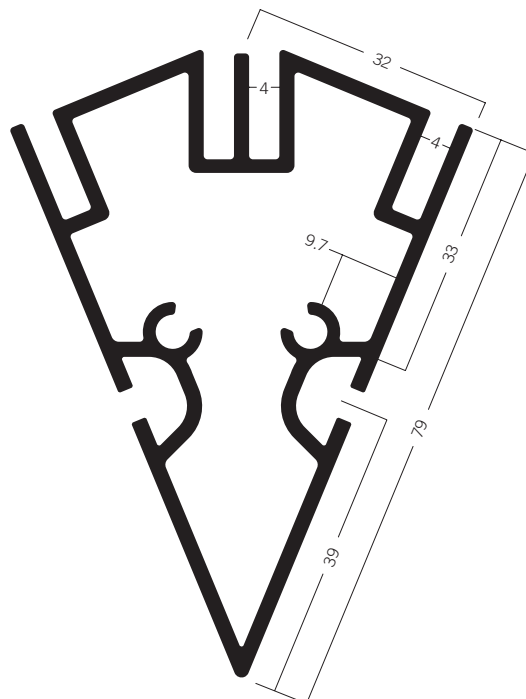


WP 840 Upright extrusion 135°, with silicone edge groove
11.28 kg | 6060 mm

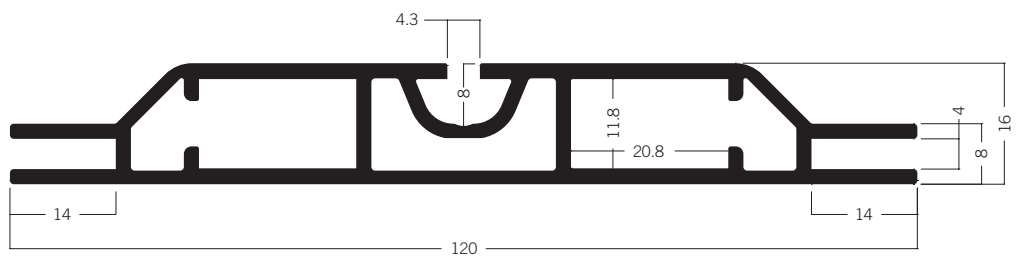

M 1901 Tension fabric extrusion for light frame 120 mm
9.77 kg | 6000 mm

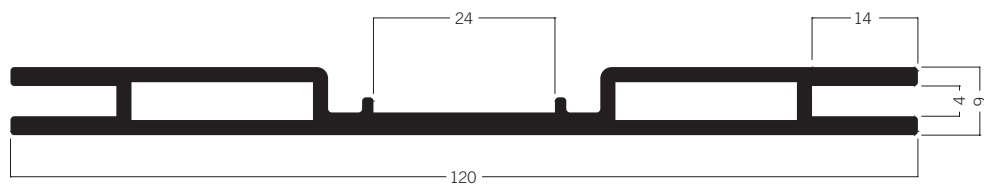


M 1330 Tension fabric extrusion 120 mm
8.28 kg | 6000 mm

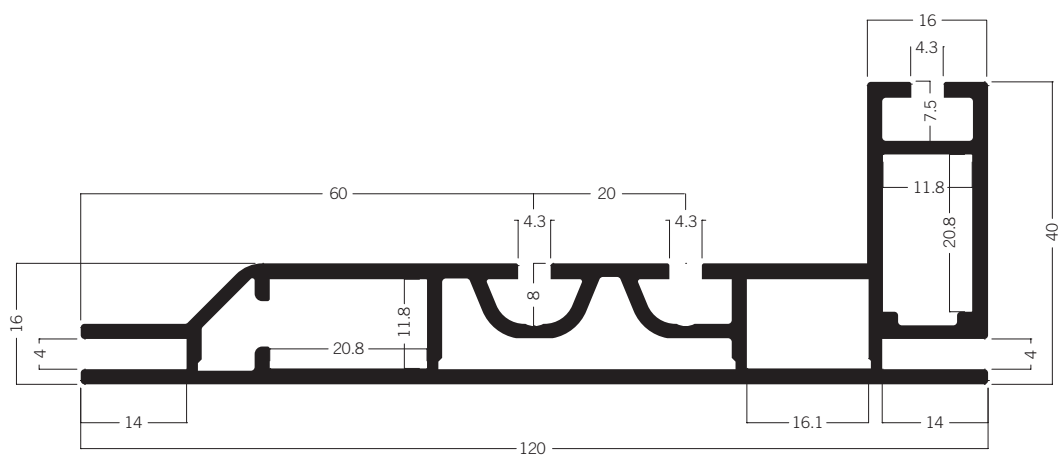


M 1915 Tension fabric extrusion für for light frame 120 mm
11.90 kg | 6000 mm

FABRIC MOUNTING

Tension Fabric Extrusions

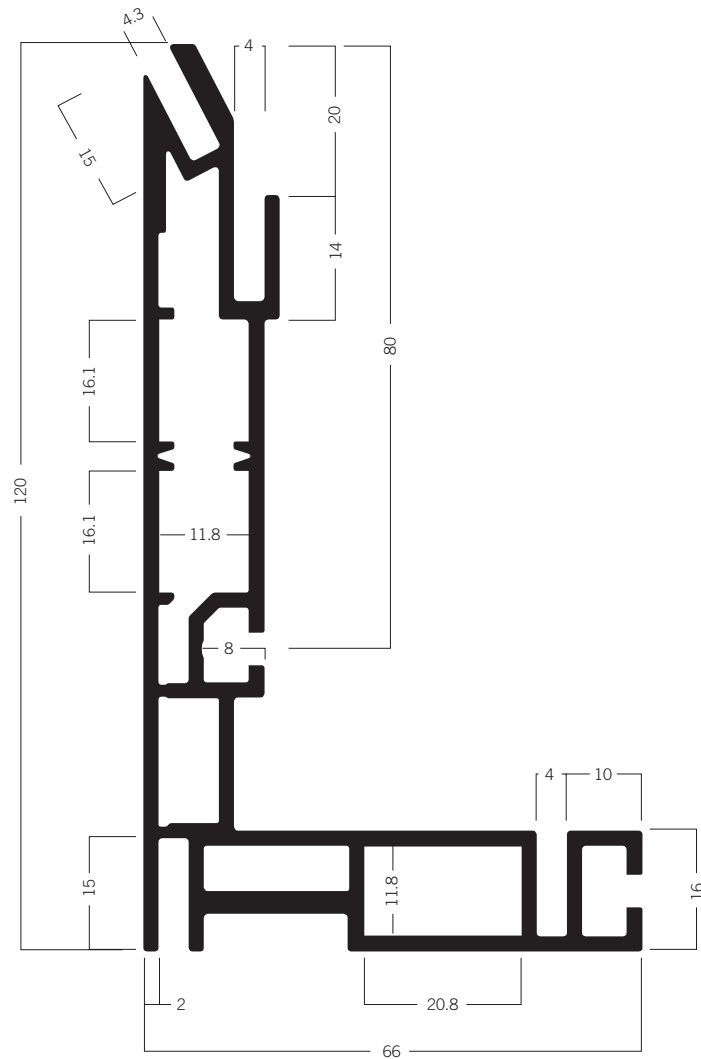


U 1060 Tension fabric extrusion 120 mm
16.20 kg | 6000 mm






FABRIC MOUNTING

Fabric Suspension Extrusions

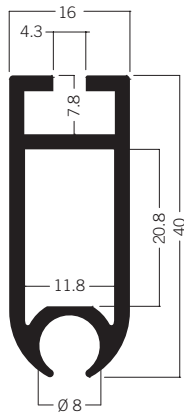


M 1354 Fabric suspension extrusion 40 mm
3.18 kg | 5000 mm

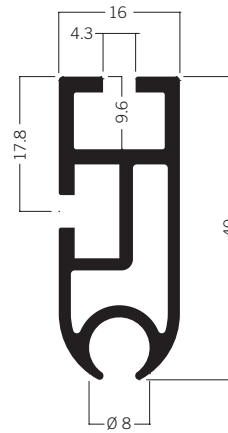


M 1356 Fabric suspension extrusion 40 mm
3.20 kg | 5000 mm

SPECIAL TYPE EXTRU SIONS

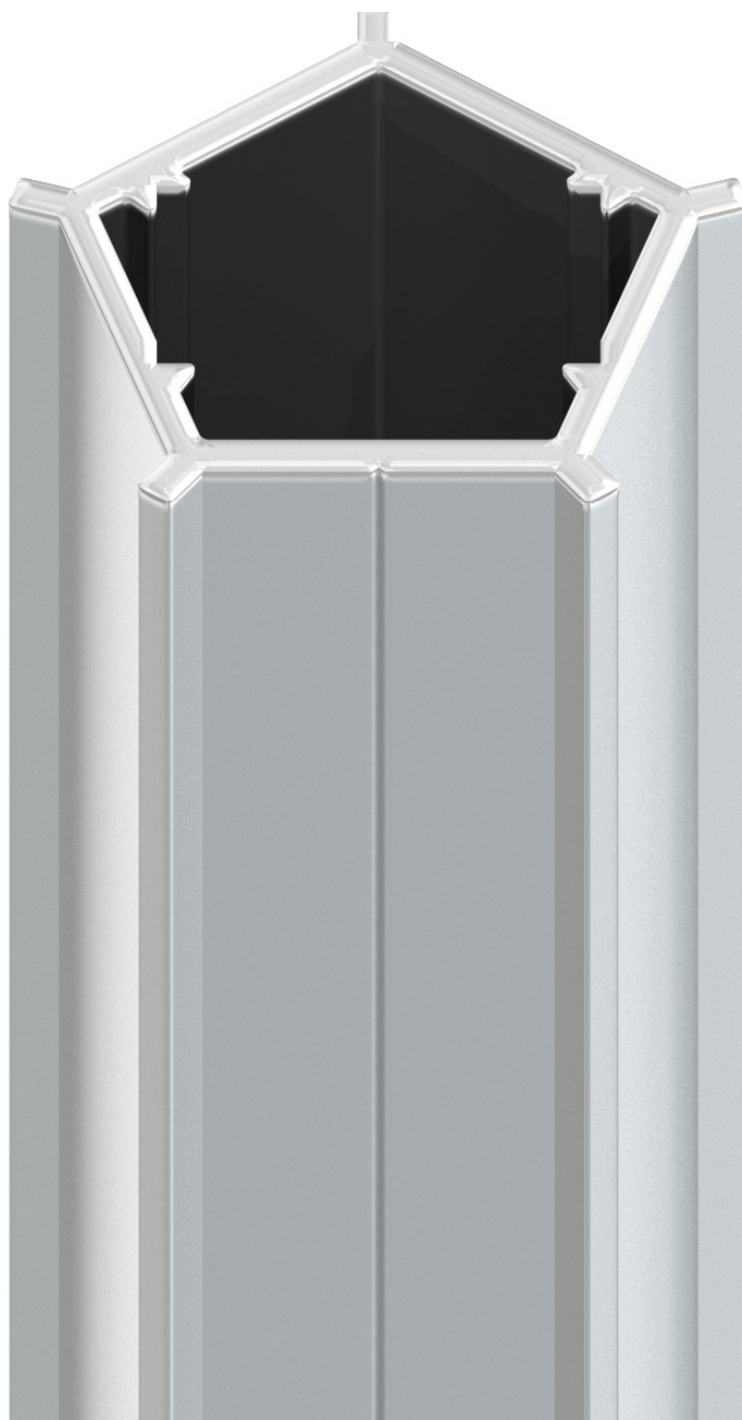





Cover Extrusions

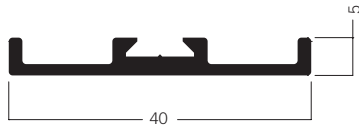

W 910 Cover extrusion for extrusions 40 mm
1.36 kg | 5000 mm

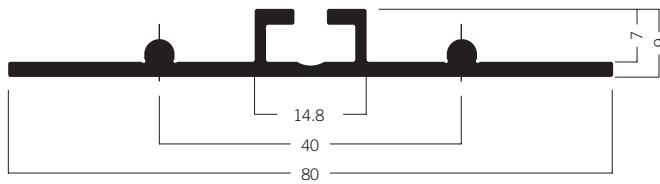

WP 830 Cover extrusion for extrusions 80 mm
3.58 kg | 6060 mm




M 1044 Cover extrusion for extrusions 80 mm
2.14 kg | 5000 mm




M 1367 Cover extrusion for extrusions 80 mm
2.12 kg | 5000 mm




M 1368 Cover extrusion for extrusions 120 mm
3.10 kg | 5000 mm

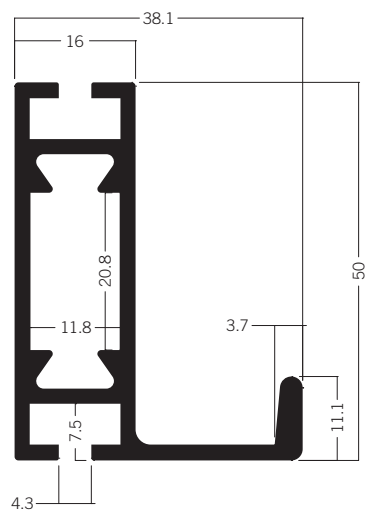

W 101 Beam extrusion 50 mm
5.56 kg | 5000 mm

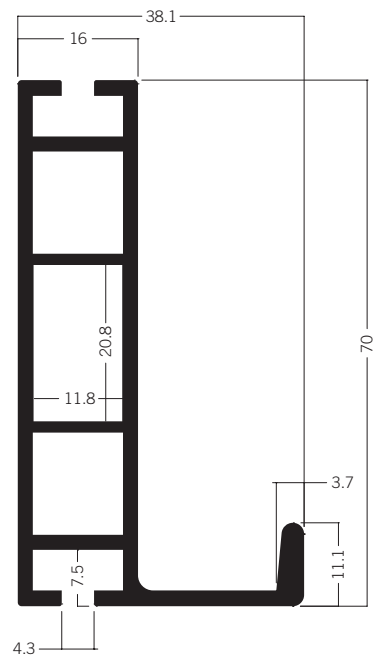


W 103 Beam extrusion 70 mm
6.51 kg | 5000 mm




W 110* Adaptor extrusion for cladded wall
1.47 kg | 5000 mm

SPECIAL TYPE EXTRUSIONS


Wall Panel Retainer

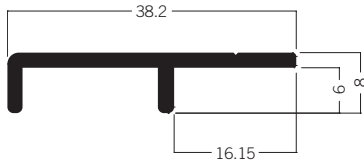


M 1562 Wall panel retainer, top
1.37 kg | 5000 mm

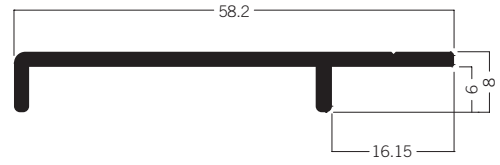


M 1572 Wall panel retainer, top
1.77 kg | 5000 mm

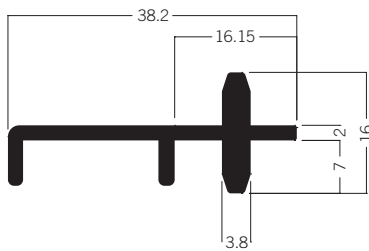


M 1567 Wall panel retainer, center
2.04 kg | 5000 mm

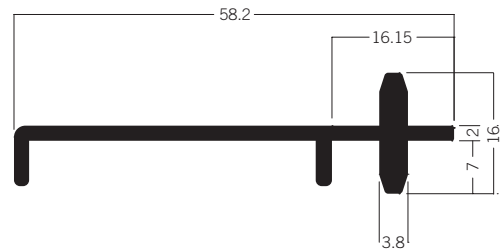


M 1577 Wall panel retainer, center
2.45 kg | 5000 mm




M 1571 Wall panel retainer, bottom
1.62 kg | 5000 mm

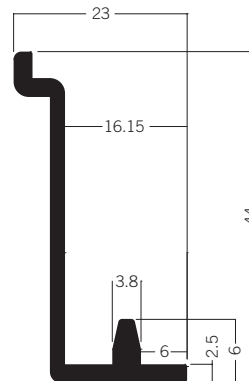


M 1581 Wall panel retainer, bottom
2.02 kg | 5000 mm

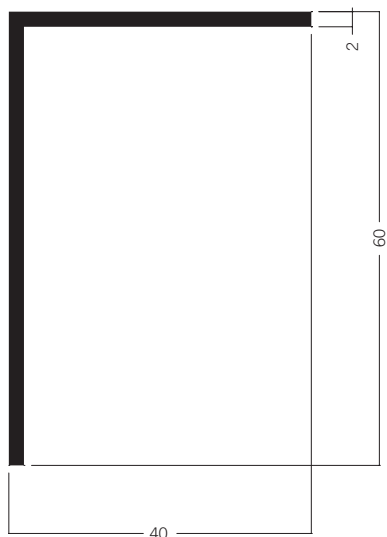


SO 500 Skirting extrusion
2.52 kg | 5000 mm

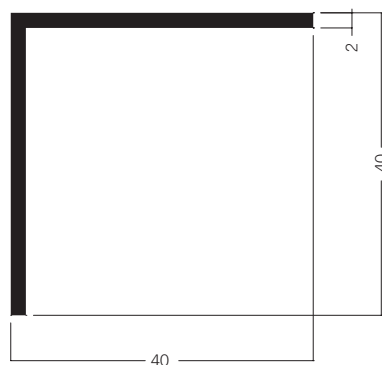

SO 400 Skirting extrusion OCTAeco floor
2.16 kg | 5000 mm

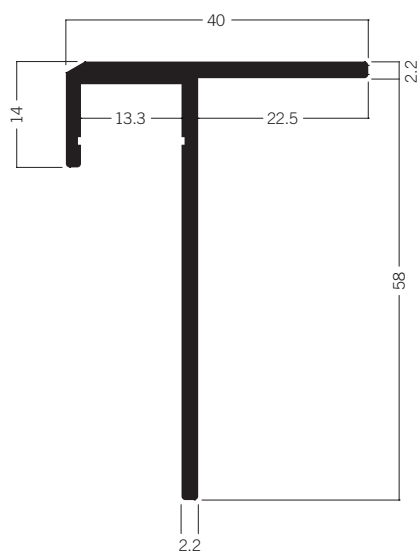


SO 600 Skirting extrusion for LED module
3.31 kg | 5000 mm

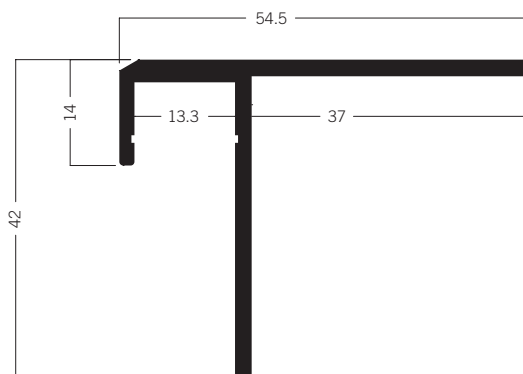


SO 630 Skirting extrusion for LED module
3.20 kg | 5000 mm

SPECIAL TYPE EXTRUSIONS


Skirting Extrusions

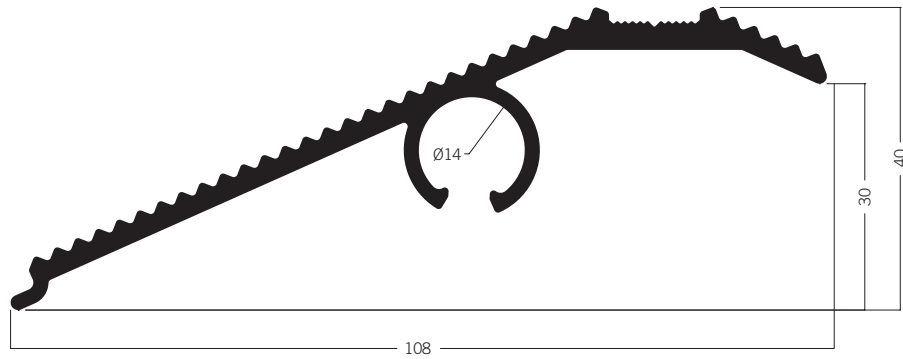


SO 620 Skirting extrusion
6.12 kg | 5000 mm

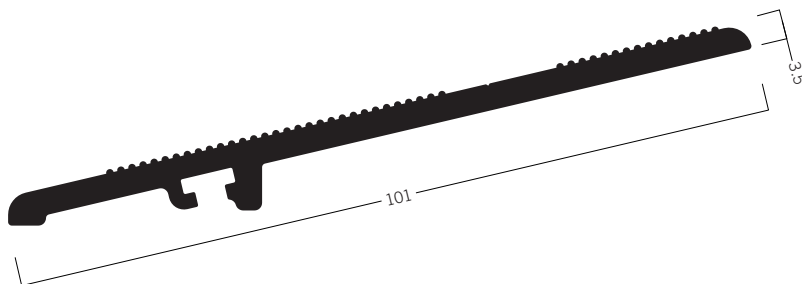


SO 640 Skirting extrusion for slope tile
5.48 kg | 5100 mm




SO 642 Laminate skirting for slope corner OCTAeco floor
2.40 kg | 5100 mm




E 470/N Sliding door extrusion
1.74 kg | 5000 mm




E 471/N Sliding door extrusion
1.61 kg | 5000 mm




E 472 Runner frame extrusion
1.74 kg | 5000 mm



A 200 Edge protection
0.61 kg | 5000 mm

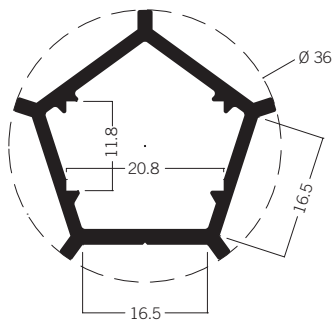


M 1980 Luminous elements extrusion
2.65 kg | 5000 mm




E 410/AL Door handle extrusion
1.20 kg | 5000 mm

SPECIAL TYPE EXTRUSIONS


Other Extrusions

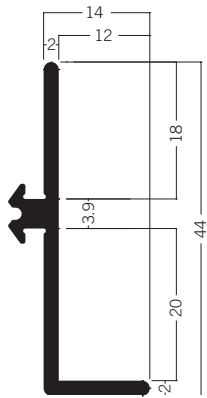

E 850* Insert extrusion
1.86 kg | 5200 mm





E 800 Wardrobe rail extrusion
4.30 kg | 5000 mm

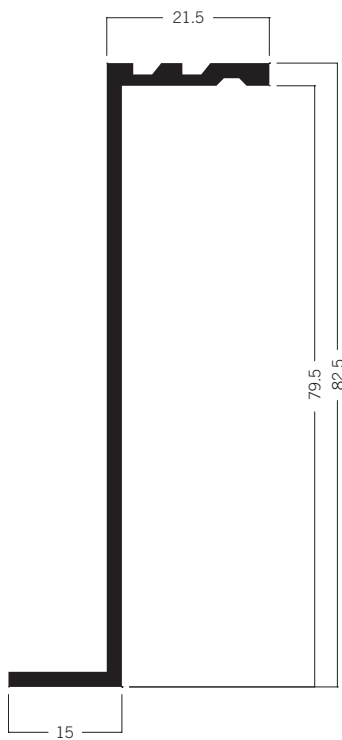


M 1520* Panel retainer extrusion for 80 mm system
3.85 kg | 6000 mm

CLEAN ROOM EXTRU SIONS

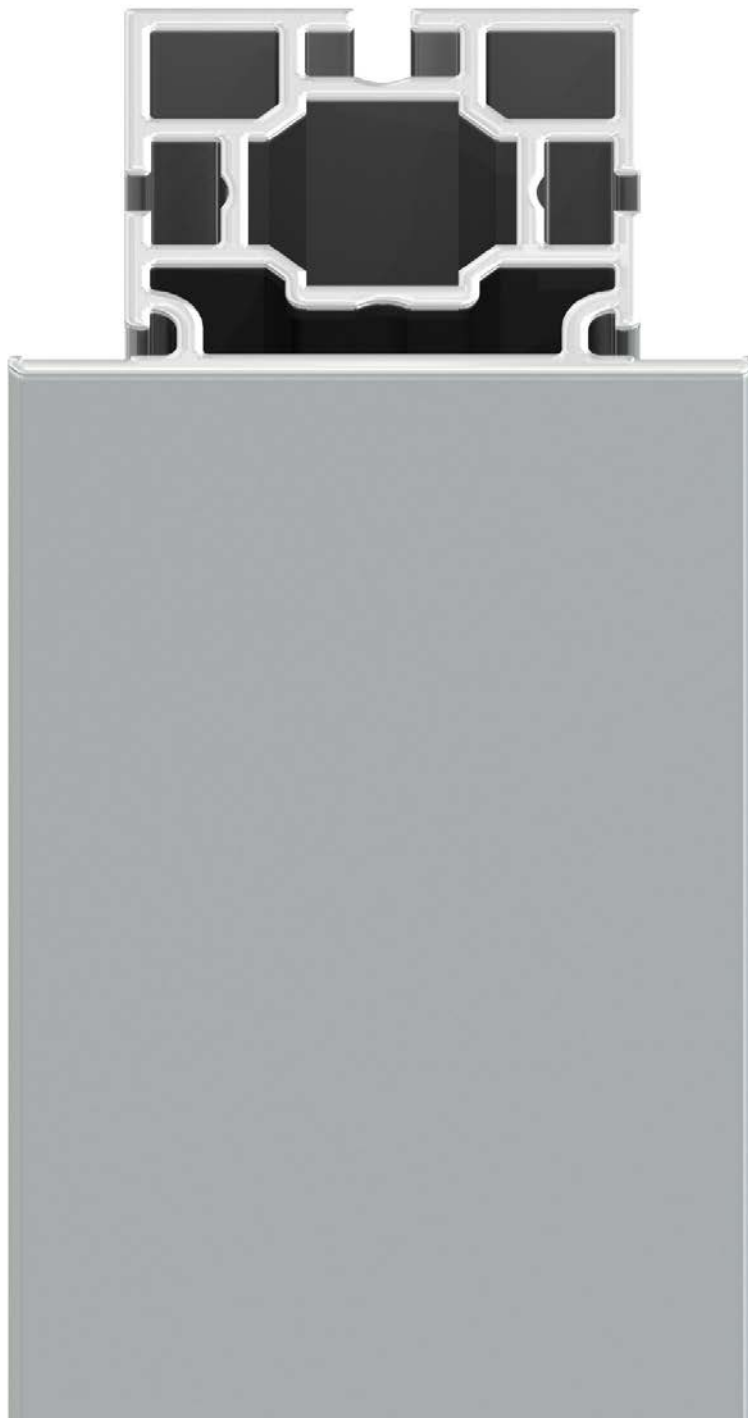


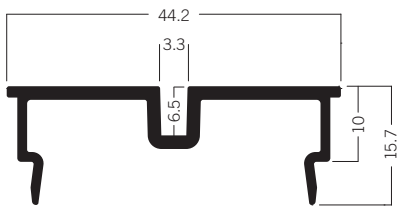


C 151 Spacer extrusion
44 × 16 mm
2.28 kg | 6000 mm




C 153 Spacer extrusion
24 × 16 mm
1.69 kg | 6000 mm




C 155* Spacer extrusion
24 × 16 mm
1.24 kg | 6000 mm

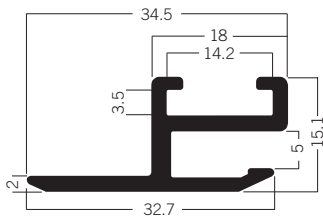

C 875 Frame extrusion
34.5 × 15 mm
2.22 kg | 6000 mm




C 157 Spacer extrusion
37 × 7 mm
1.33 kg | 6000 mm



C 158 Spacer extrusion
18 × 7 mm
0.79 kg | 6000 mm



C 161 Panel retainer extrusion
2 × 20 mm
0.75 kg | 6000 mm




C 162 Panel retainer extrusion
2 × 20 mm
0.75 kg | 6000 mm




C 163 Panel retainer extrusion
2 × 22 mm
0.81 kg | 6000 mm


Wall Extrusions




C 154 Panel retainer extrusion
22 × 23 mm
1.42 kg | 6000 mm




C 165 Panel retainer extrusion
12 × 19 mm
1.08 kg | 6000 mm




C 169 Panel retainer extrusion
11 × 20 mm
1.24 kg | 6000 mm




C 170 Retainer extrusion, vertical
33 × 20 mm
1.38 kg | 6000 mm

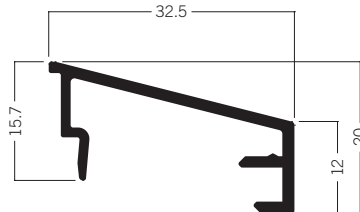


C 171 Retainer extrusion, horizontal
33 × 12 mm
1.64 kg | 6000 mm

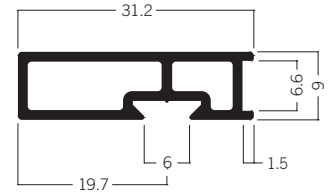


C 722 Retainer extrusion
31 × 9 mm
1.83 kg | 6000 mm

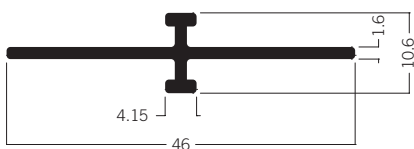


C 1415 Adaptor extrusion for glazing
1.58 kg | 6000 mm



C 1301 Channeling extrusion 36 × 36 mm
2.62 kg | 6000 mm

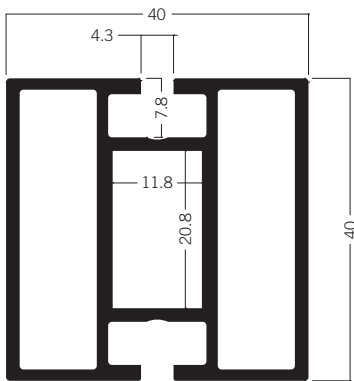


C 120 Beam extrusion 40 × 40 mm
7.09 kg | 6000 mm

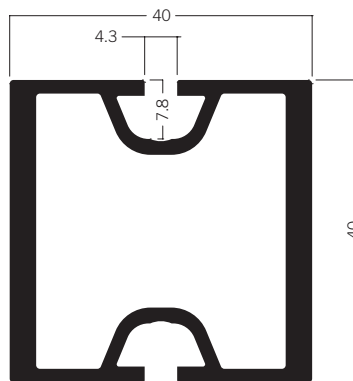


C 124 Upright extrusion 40 × 40 mm
5.82 kg | 4500 mm


C 125 Upright extrusion 40 × 40 mm
7.57 kg | 6000 mm

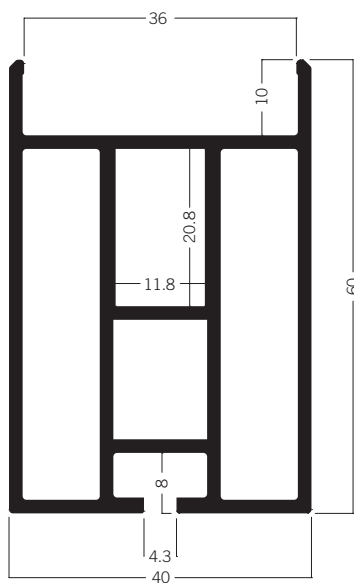

C 105 Beam extrusion
40 × 60 mm
9.26 kg | 6000 mm

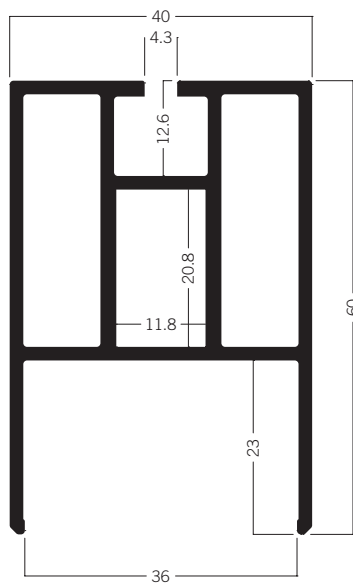


C 110 Beam extrusion
40 × 60 mm
7.57 kg | 6000 mm

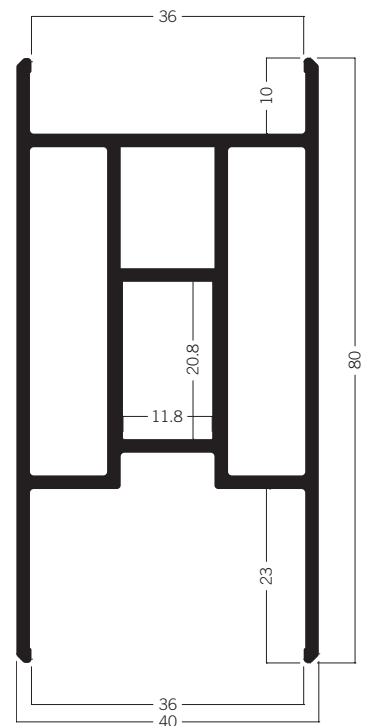


C 100 Beam extrusion
40 × 80 mm
9.98 kg | 6000 mm


Wall Extrusions

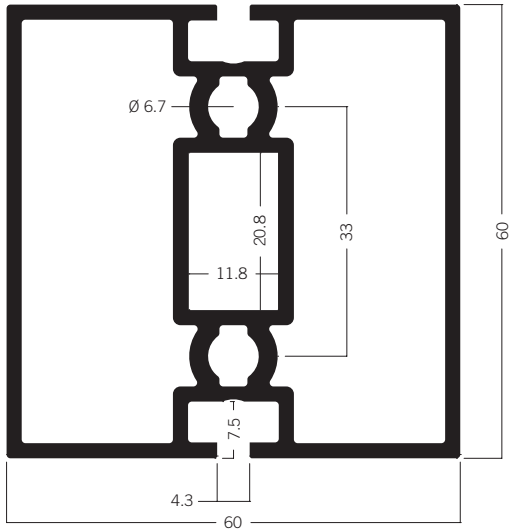


C 122 Beam extrusion 60 × 60 mm
13.03 kg | 6000 mm

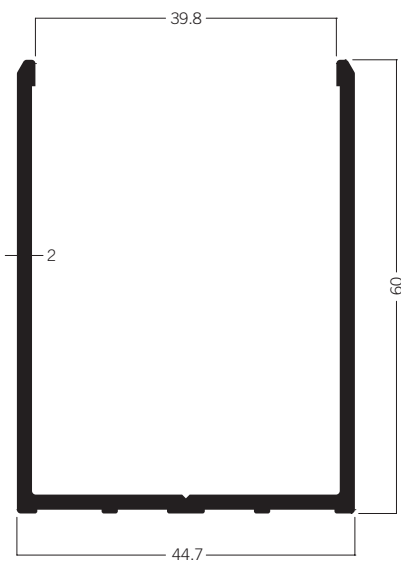


C 130 Floor U-channel extrusion
45 × 60 mm
5.33 kg | 6000 mm

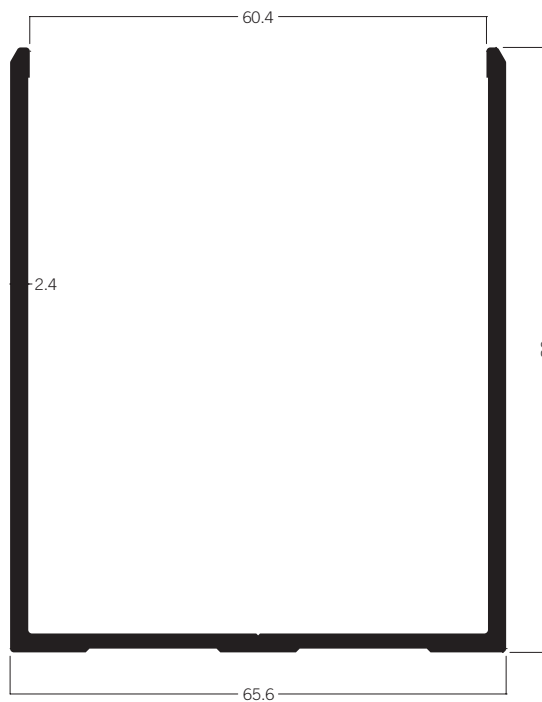


C 1005* Floor and ceiling U-channel extrusion
66 × 80 mm
8.47 kg | 6000 mm

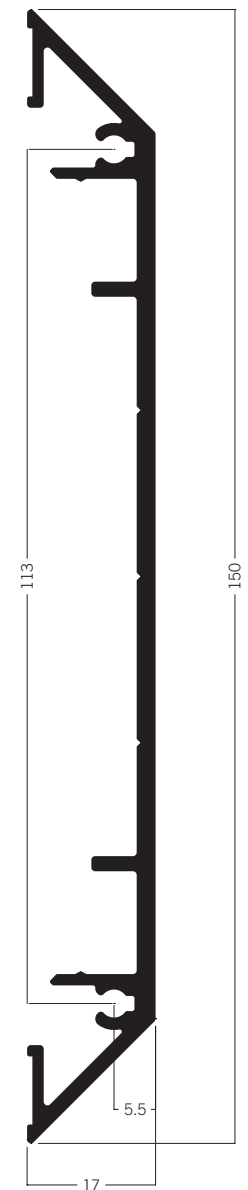


C 1327 Cable channel
extrusion
7.23 kg | 6000 mm

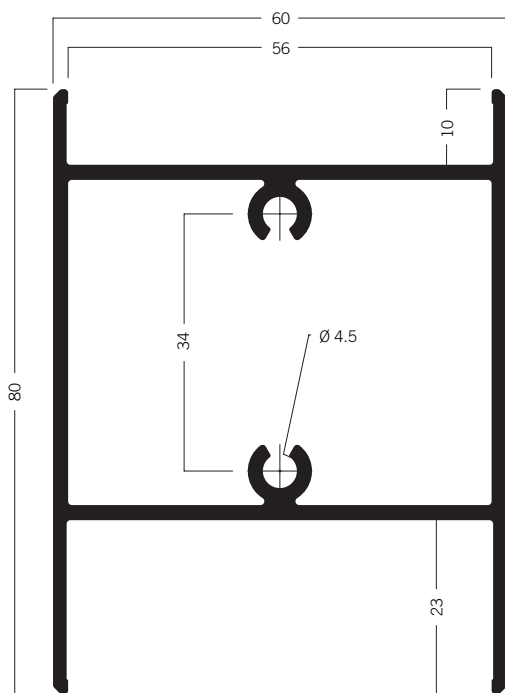


C 60-100 Beam extrusion 60 x 80 mm
9.88 kg | 6000 mm

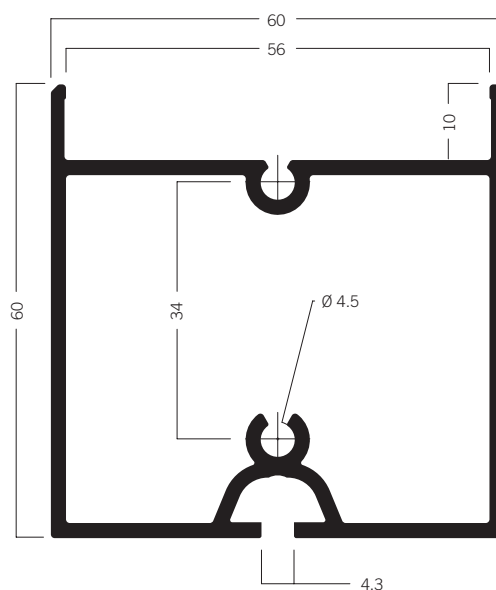

C 60-105 Beam extrusion 60 x 60 mm
8.95 kg | 6000 mm

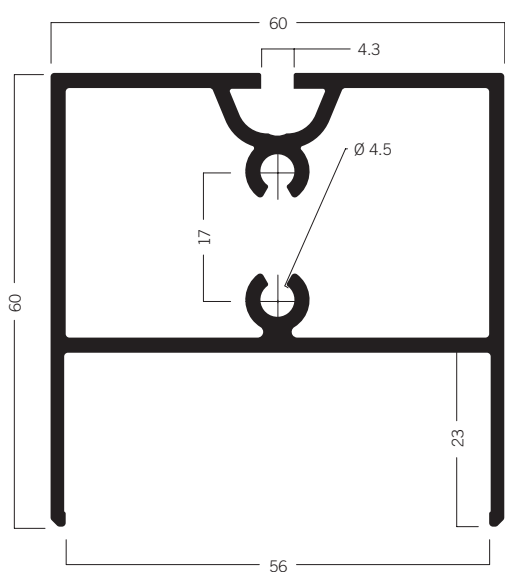


C 60-110 Beam extrusion 60 x 60 mm
9.18 kg | 6000 mm

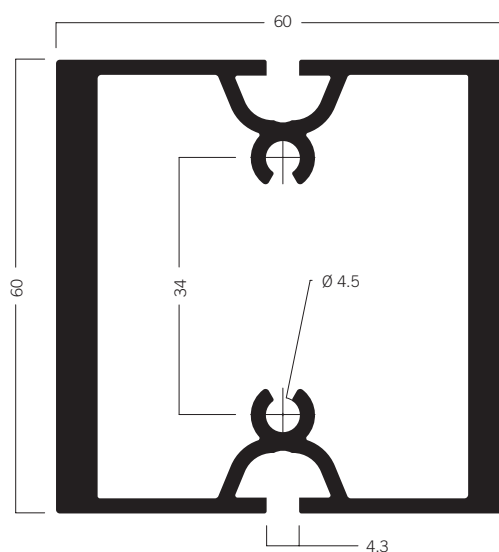


C 60-125 Upright extrusion 60 x 60 mm
16.25 kg | 6000 mm

CLEANROOM EXTRUSIONS


Wall Extrusions

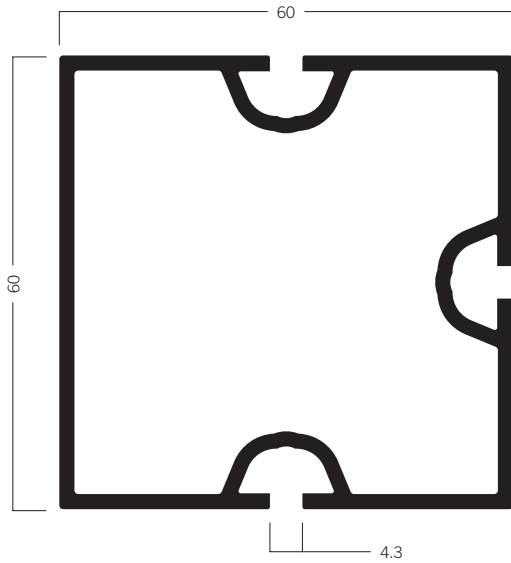


C 60-1005 Beam extrusion 60 × 60 mm
9.51 kg | 6000 mm

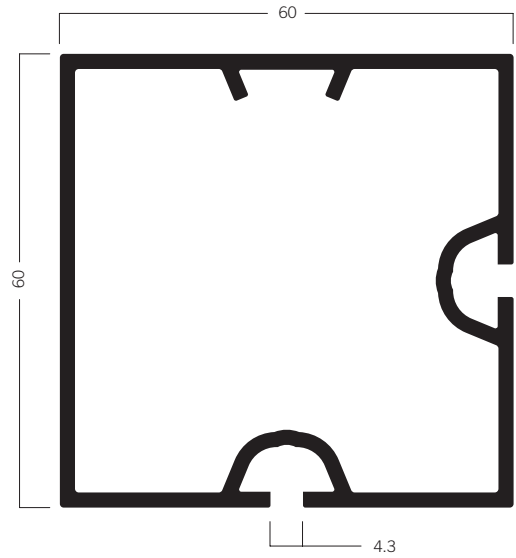


C 60-1007 Upright extrusion 60 × 60 mm
9.18 kg | 6000 mm

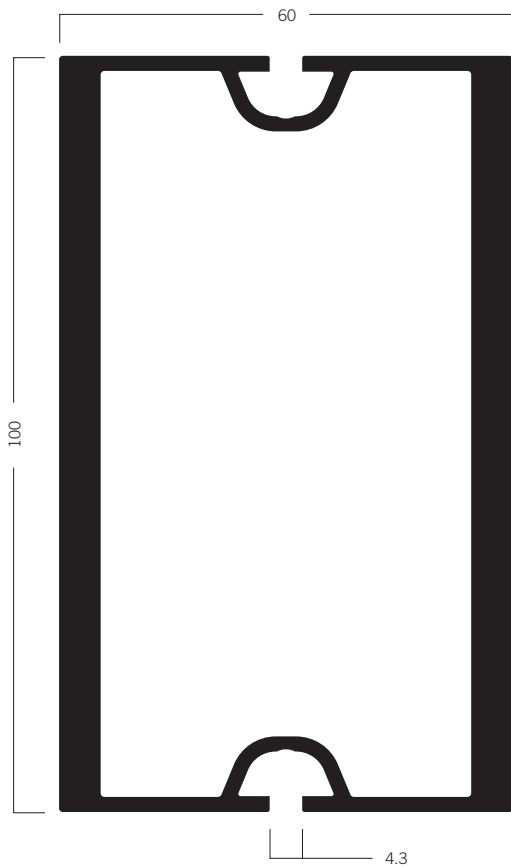


C 60-1029 Upright extrusion 60 × 100 mm
27.00 kg | 6000 mm

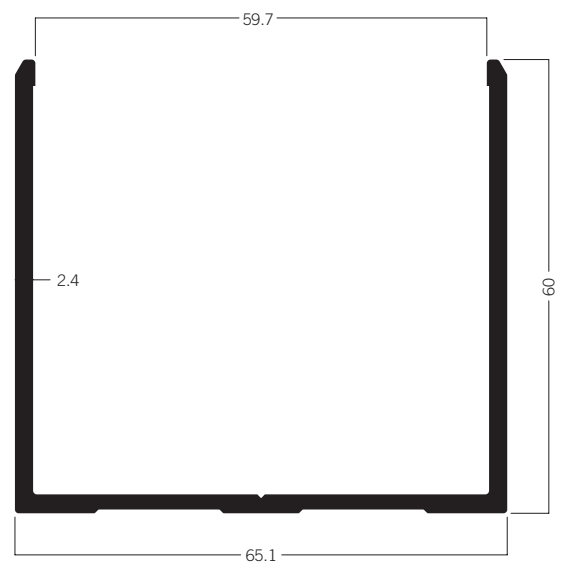


C 60-130 U-channel extrusion 65 × 60 mm
6.90 kg | 6000 mm




C 612 Support extrusion 17 × 24 mm
1.11 kg | 6000 mm



C 613 Support extrusion 30 × 24 mm
1.82 kg | 6000 mm

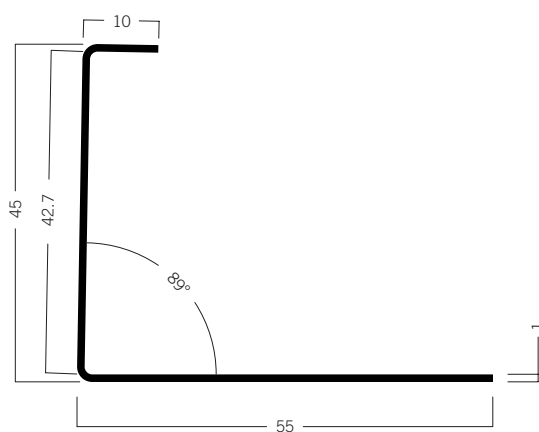


C 670 Ceiling extrusion
0.56 kg | 2400 mm

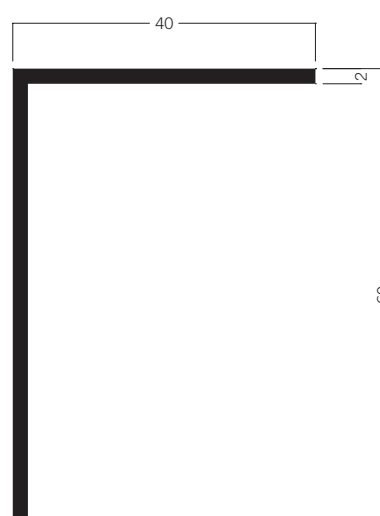


C 680 L-extrusion 40 × 60 mm
2.96 kg | 6000 mm


Ceiling Extrusions

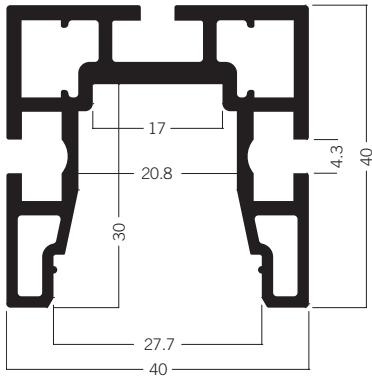


C 404* Ceiling extrusion LED
(USA) 8.05 kg | 6000 mm

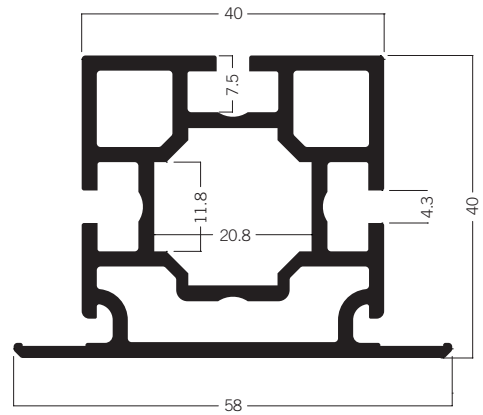


C 601 Extrusion 58 × 40 mm
8.69 kg | 6000 mm

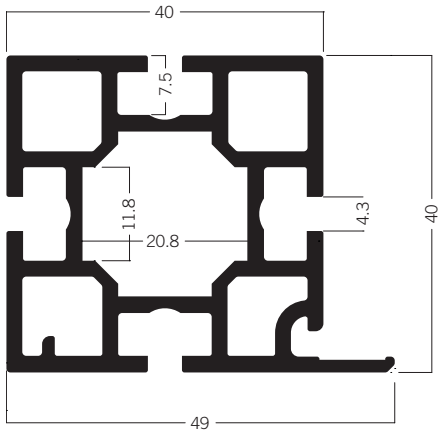


C 604 Extrusion 49 × 40 mm
9.15 kg | 6000 mm

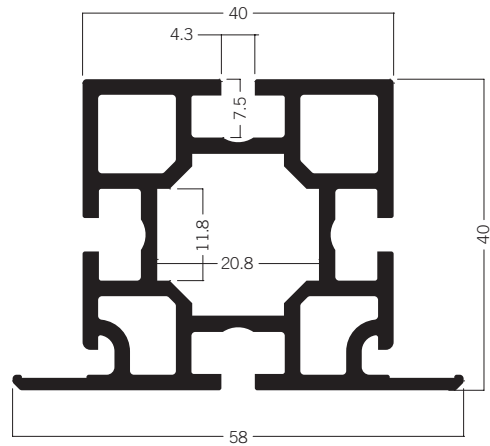


C 606 Extrusion 58 × 40 mm
9.50 kg | 6000 mm

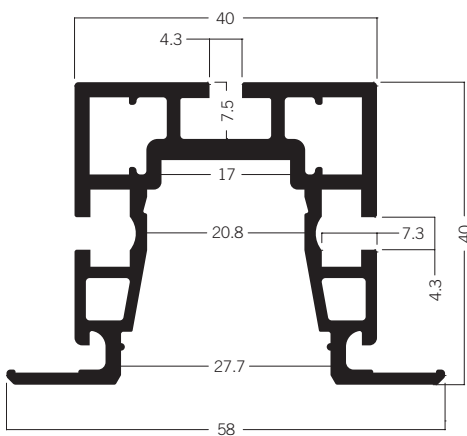


C 608 Ceiling extrusion LED
7.32 kg | 6000 mm

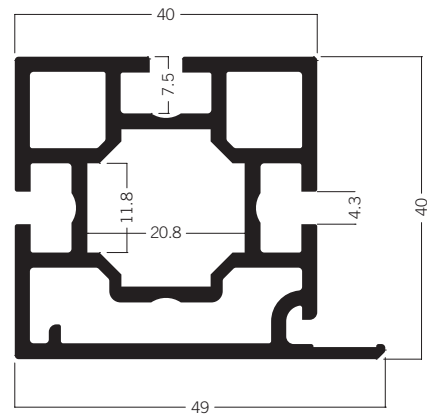


C 701 Extrusion 49 × 40 mm
8.88 kg | 6000 mm

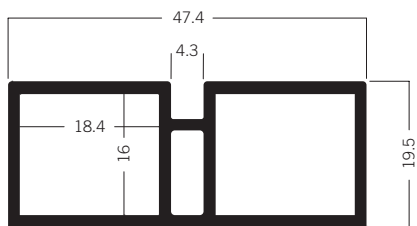


C 1210 Frame extrusion for 60 mm
pharma glazing
4.33 kg | 6000 mm



C 1220 Frame extrusion 20 × 31 mm
3.42 kg | 6000 mm

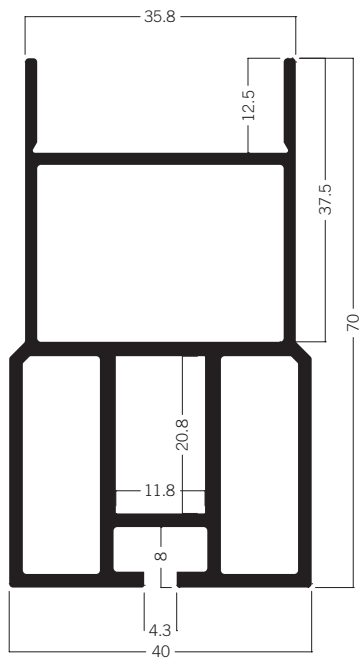


C 115 Beam extrusion 40 × 70 mm
9.03 kg | 6000 mm

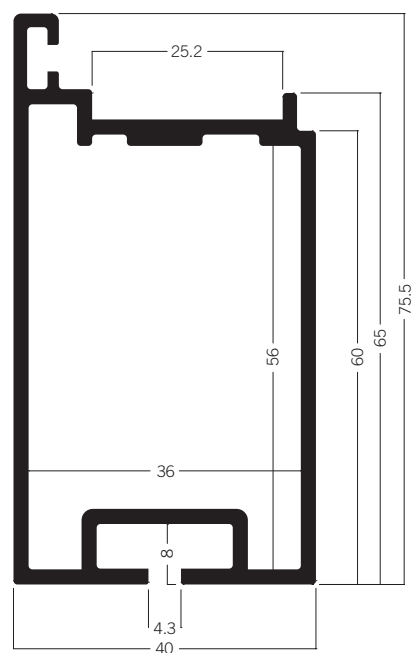


C 305 Window panel extrusion 40 × 75.5 mm
8.62 kg | 6000 mm


Door Extrusions

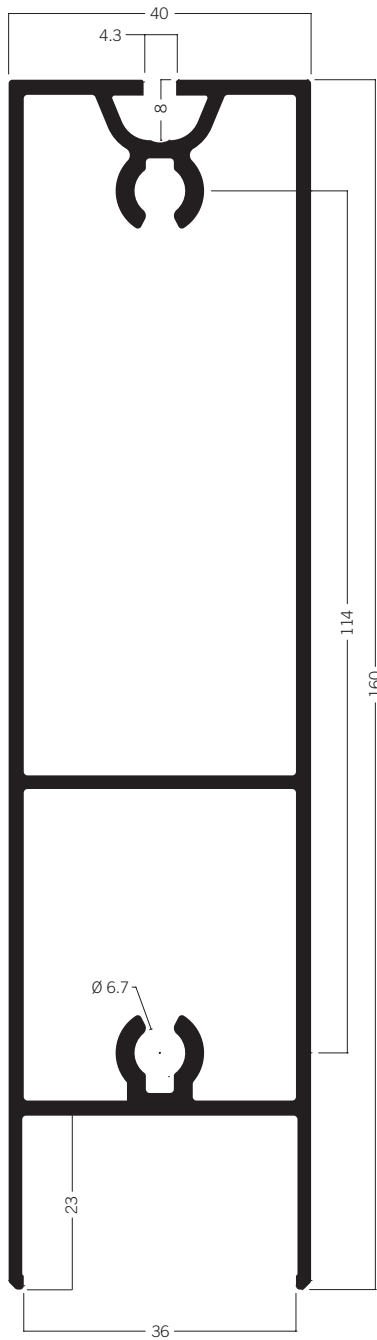


C 315 Door beam extrusion 40 x 160 mm
16.36 kg | 6000 mm

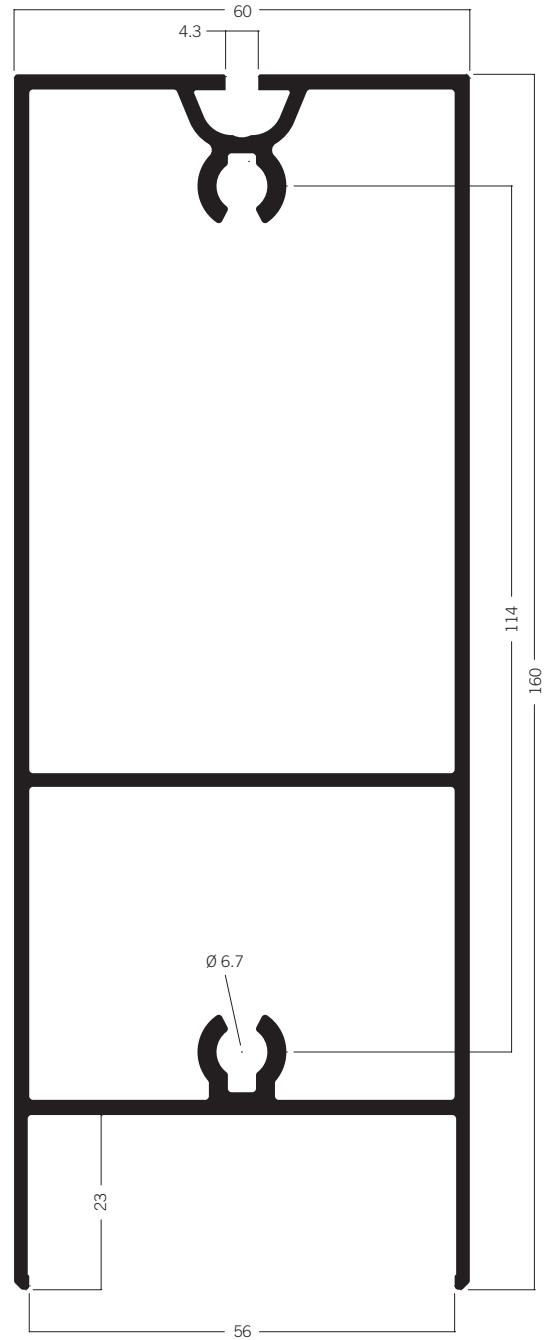


C 316 Door beam extrusion 60 x 160 mm
18.12 kg | 6000 mm

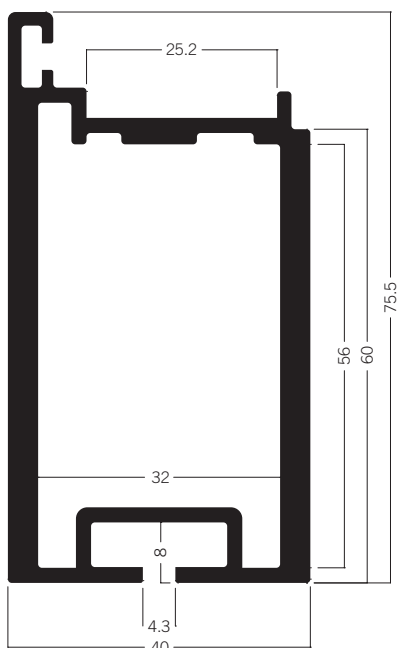


C 308 Door panel extrusion 40 × 75.5 mm
11.45 kg | 5500 mm

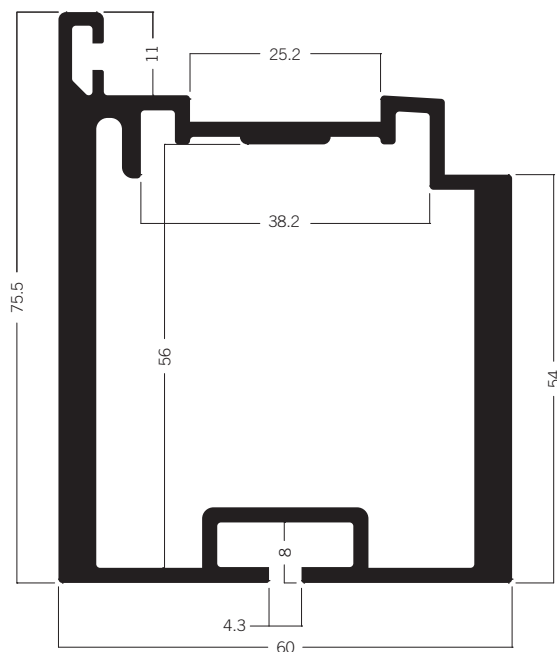

C 309 Door panel extrusion 60 × 75.5 mm
14.46 kg | 5500 mm

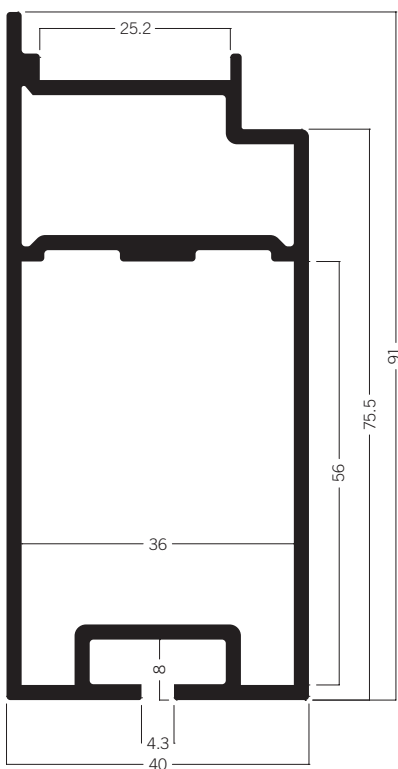


C 310 Double door panel extrusion 40 × 91 mm
10.80 kg | 6000 mm

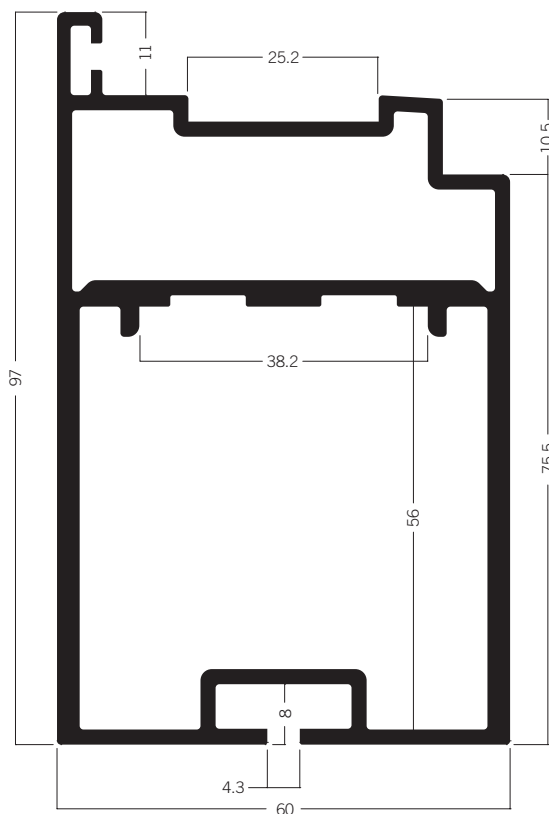


C 311 Double door panel extrusion 60 × 97 mm
9.09 kg | 6000 mm


Door Extrusions

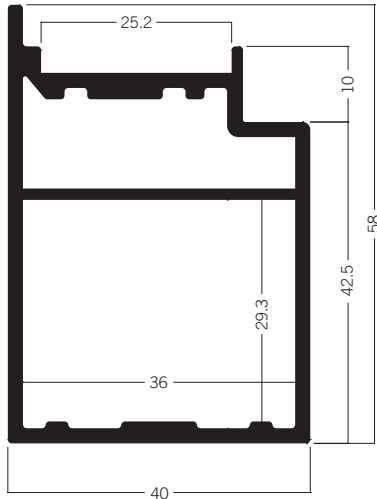

C 301 Door frame extrusion 40 × 58 mm
7.54 kg | 6000 mm

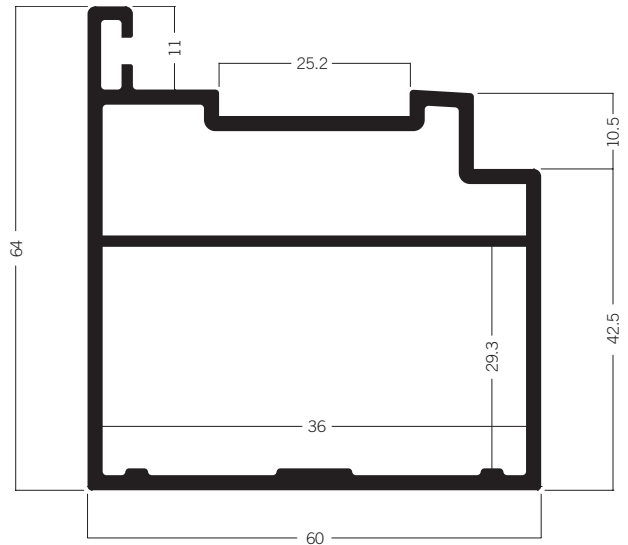

C 302 Door frame extrusion 60 × 64 mm
9.51 kg | 6000 mm

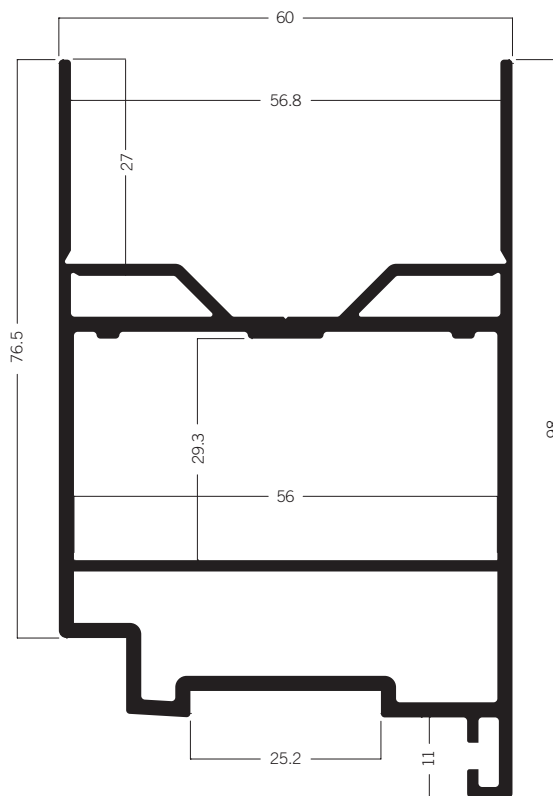

C 304 Door frame extrusion top 60 mm
12.12 kg | 6000 mm




PLASTIC




In addition to our aluminium extrusions, our product portfolio includes a wide range of supplementary plastic extrusions – from connecting extrusions to cable ducts and cover extrusions. As a material, plastic offers decisive advantages for on-site adjustments. It is flexible, lightweight and easy to modify. Matching the colours of our various aluminium surfaces, the extrusions blend in perfectly with the overall appearance.




PLASTIC EXTRU SIONS

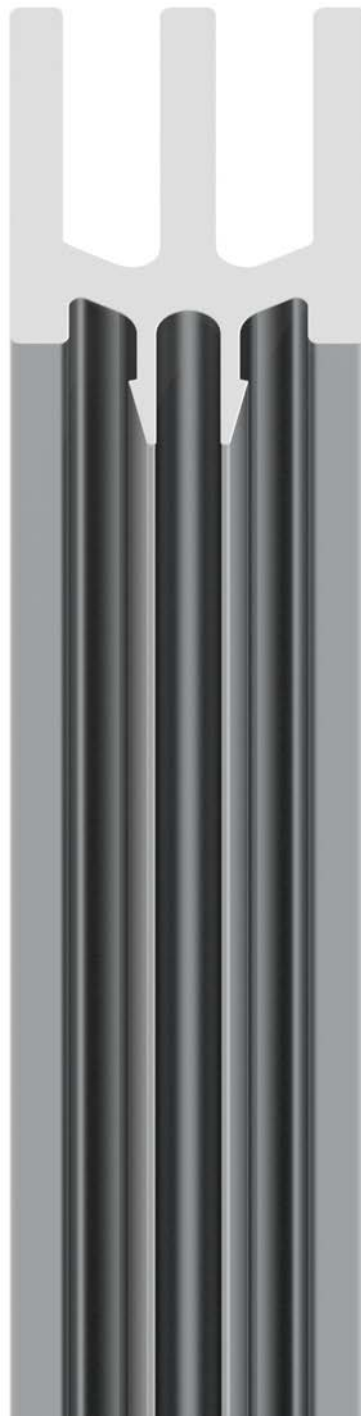





E 463 Cable retaining extrusion
1.20 kg | 5000 mm




E 460 Cable retaining extrusion
0.73 kg | 5000 mm




E 438 Extrusion connector
0.28 kg | 5000 mm




M 1319 Tension fabric extrusion 20 mm
1.46 kg | 6000 mm




E 420 Glass panel retainer
0.83 kg | 5000 mm




E 424 Glass panel retainer
0.45 kg | 5000 mm




E 400 Upper track for sliding doors
0.60 kg | 5000 mm




E 401 Lower track for sliding doors
0.45 kg | 5000 mm




E 410 Door handle extrusion
0.50 kg | 5000 mm

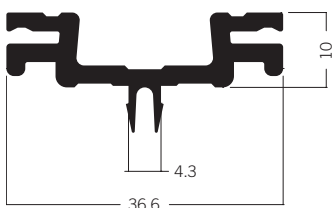


C 160 Adaptor extrusion 10 × 37 mm
1.61 kg | 6000 mm

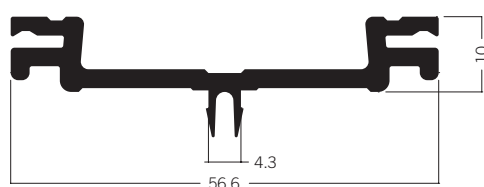


C 159 Adaptor extrusion 10 × 57 mm
2.04 kg | 6000 mm




E 442 Supporting edge
0.40 kg | 5000 mm




E 440 Glass panel retainer
0.47 kg | 5000 mm




E 430 Door stopping extrusion
0.37 kg | 5000 mm




E 458 Cover extrusion
0.38 kg | 5000 mm




M 1844 Cover extrusion
0.42 kg | 6000 mm



M 1846 Cover extrusion
0.51 kg | 6000 mm




E 455 Groove filler
0.12 kg | 5000 mm




E 421 Glass panel retainer
0.41 kg | 5000 mm




E 441 Rubber sponge bumper
1.00 kg | 50000 mm




E 476 Clamping extrusion
0.19 kg | 5000 mm




E 477 Clamping extrusion
0.17 kg | 5000 mm




C 725 Extrusion connector
0.26 kg | 5950 mm




E 480 Flat rubber
0.07 kg | 10000 mm




E 451 Extrusion connector
0.35 kg | 5000 mm



E 452 Extrusion connector
0.23 kg | 5000 mm



E 444 Anti-rattle strip
2.02 kg | 50000 mm



E 445 Anti-rattle strip
3.50 kg | 50000 mm

A

A 200 62

C

C 60-100 70

C 60-105 70

C 60-110 70

C 60-125 70

C 60-130 71

C 60-1005 71

C 60-1007 71

C 60-1029 71

C 100 68

C 105 68

C 110 68

C 115 74

C 120 68

C 122 69

C 124 68

C 125 68

C 130 69

C 151 66

C 153 66

C 154 67

C 155* 66

C 157 66

C 158 66

C 159 82

C 160 82

C 161 66

C 162 66

C 163 66

C 165 67

C 169 67

C 170 67

C 171 67

C 301 77

C 302 77

C 304 77

C 305 74

C 308 76

C 309 76

C 310 76

C 311 76

C 315 75

C 316 75

C 404* 73

C 601 73

C 604 73

C 606 73

C 608 73

C 612 72

C 613 72

C 670 72

C 680 72

C 701 73

C 722 67

C 725 83

C 875 66

C 1005* 69

C 1210 74

C 1220 74

C 1301 67

C 1327 69

C 1415 67

CO 730* 41

D

DFL 230 24

DFL 400 37

DFL 400A* 37

DFS 84 11

DFS 84/6000 11

E

E 400 82

E 401 82

E 410 82

E 410/AL 62

E 420 82

E 421 83

E 424 82

E 430 83

E 438	82
E 440	83
E 441	83
E 442	83
E 444	84
E 445	84
E 451	84
E 452	84
E 455	83
E 458	83
E 460	82
E 463	82
E 470/N	62
E 471/N	62
E 472	62
E 476	83
E 477	83
E 480	84
E 800	63
E 850*	63

M

M 225	12
M 226	12
M 260	35
M 770	24
M 1000	9
M 1001	9
M 1002	9
M 1003	9
M 1005	9
M 1007	9
M 1009	31
M 1010	9
M 1017	11
M 1018	10
M 1019	10
M 1020	10
M 1021	10
M 1022*	10
M 1023	10

M 1025	20
M 1026	20
M 1029	22
M 1031	22
M 1043*	22
M 1044	57
M 1046	13
M 1052	23
M 1059	11
M 1060*	23
M 1063	17
M 1069	20
M 1070	31
M 1072	29
M 1081	20
M 1082	20
M 1092	20
M 1140	34
M 1155	11
M 1201*	34
M 1202	34
M 1208	34
M 1222	35
M 1301	42
M 1302	40
M 1304	44
M 1305	42
M 1306	42
M 1307	43
M 1309	40
M 1310	40
M 1312	40
M 1319	82
M 1320	17
M 1321	41
M 1322	41
M 1322/E	41
M 1322/I	41
M 1325	45
M 1326	40
M 1330	48

M 1332	41
M 1340	18
M 1354	53
M 1356	53
M 1367	57
M 1368	57
M 1400	8
M 1460	34
M 1504	42
M 1520*	63
M 1562	59
M 1567	59
M 1571	59
M 1572	59
M 1577	59
M 1581	59
M 1600*	34
M 1602	14
M 1603*	14
M 1606	34
M 1607	40
M 1614	40
M 1618	8
M 1620	34
M 1622	28
M 1625	8
M 1629	30
M 1844	83
M 1846	83
M 1901	48
M 1910	44
M 1915	48
M 1920	44
M 1925	45
M 1930	42
M 1935	45
M 1970	42
M 1980	62

R

R 102	25
R 122	25

S

S 10*	8
S 100	26
S 108	26
S 201	26
S 203	26
S 206	28
S 209	9
S 250	32
S 251	32
S 252	32
S 302	30
S 308	26
S 380	26
S 382	43
S 385R*	43
S 408	27
S 500	30
S 1100	34
S 1105	34
S 1106	34
S 1123	8
S 1125	8
S 1129	31
S 1200	34
S 1302*	28
S 1303	28
S 1310	29
S 1610*	21
S 3050	36
S 6105	36
SO 400	60
SO 500	60
SO 600	60
SO 620	61
SO 630	60

SO 640	61
SO 642	61

U

U 1020	10
U 1030*	18
U 1060	49
U 1063	50
U 1066	18

V

V 2000	8
V 2020*	30
V 2040	14

W

W 101	58
W 103	58
W 110*	58
W 416	14
W 730	43
W 735R*	43
W 825*	21
W 901*	21
W 906	43
W 908	33
W 910	57
WP 820	47
WP 830	57
WP 840	47
WP 850	46
WP 860	46

Z

Z 100	15
Z 110	17
Z 160	17
Z 164*	17
Z 300	14
Z 303	14
Z 305	14

Z 307	14
Z 308	14
Z 310	15
Z 400	16
Z 402	16
Z 408*	16
Z 460	16
Z 464*	16
Z 508	19
Z 560	19
Z 600	19
Z 2100	20
Z 2105	20
Z 4100	15
Z 4300	15
Z 4400	15
Z 4401	15
Z 4700	15



EXHIBITION SYSTEMS
PROJECT SOLUTIONS
PRESENTATION
INTERIOR DESIGN
CLEANROOM SYSTEMS

OCTANORM® Germany
Head Office

Raiffeisenstraße 39
70794 Filderstadt
T. +49 711 77003-0
F. +49 711 77003-53
info@octanorm.de
www.octanorm.com

EUROPE

OCTANORM® Nordic
T. +46 8 621 6500
www.octanorm.se

OCTANORM® Polska
T. +48 22 773 0350
www.octanorm.pl

OCTANORM® Belgium
T. +32 475 35 60 76
www.octanorm.be

OCTANORM® France
T. +33 6 79 11 32 05
www.octanorm.fr

OCTANORM® UK
T. +44 20 85 45 2945
www.octanorm.co.uk

OCTANORM® Espana
T. +34 930 019 424
www.octanorm.es

OCTANORM® Hellas
T. +30 2310 79 6521
www.octanorm.gr

OCTANORM® Italia
T. +39 031 2269715
www.octanorm.it

OCTANORM® Adria
T. +386 590 56301
www.octanormadria.com

AFRICA

OCTANORM® Nigeria
T. +234 8030 8211 91
www.it-al.design

OCTANORM® South Africa
T. +27 11 433 2010
www.octanorm.co.za

AMERICA

OCTANORM® North America
T. +1 770 7 32 1520
www.octanormna.com

OCTANORM® México
T. +52 55 5804 6325
www.octanorm.com.mx

AUSTRALIA

OCTANORM® Australia
T. +61 3 7017 2753
www.octanorm.com.au

ASIA

OCTANORM® China
T. +86 512 6283 3336
www.octanorm.cn

OCTANORM® Japan
T. +81 45 511 8144
www.octanorm.co.jp

MIDDLE EAST

OCTANORM® Emirates
T. +971 4 340 6888
www.octanormemirates.net