

# OCTA WALL 40

CLASSIC | TOOLLESS

THE LIGHT WEIGHT  
SYSTEM






# DIV ERSITY



Lianas. Birds of Paradise. Centipedes. The tropical rainforest is home to more than 30 million animal and plant species. Living together in perfect harmony and finely adapted to the conditions. 12 hours of sunlight every day. Rainfall in all seasons. Multistorey construction. From soil to crown, no matter the layer, each organism is developed for a particular task. Provide shade. Store water. Absorb CO<sub>2</sub>. Dead plants are immediately transformed into nutrients and recombined into something new. This is the only way to create such an immense variety of species. So the question is not whether to take advantage of the versatility or not. But: How do we need to create the basic components of a system to achieve maximum diversity? Here are some inspiring answers.



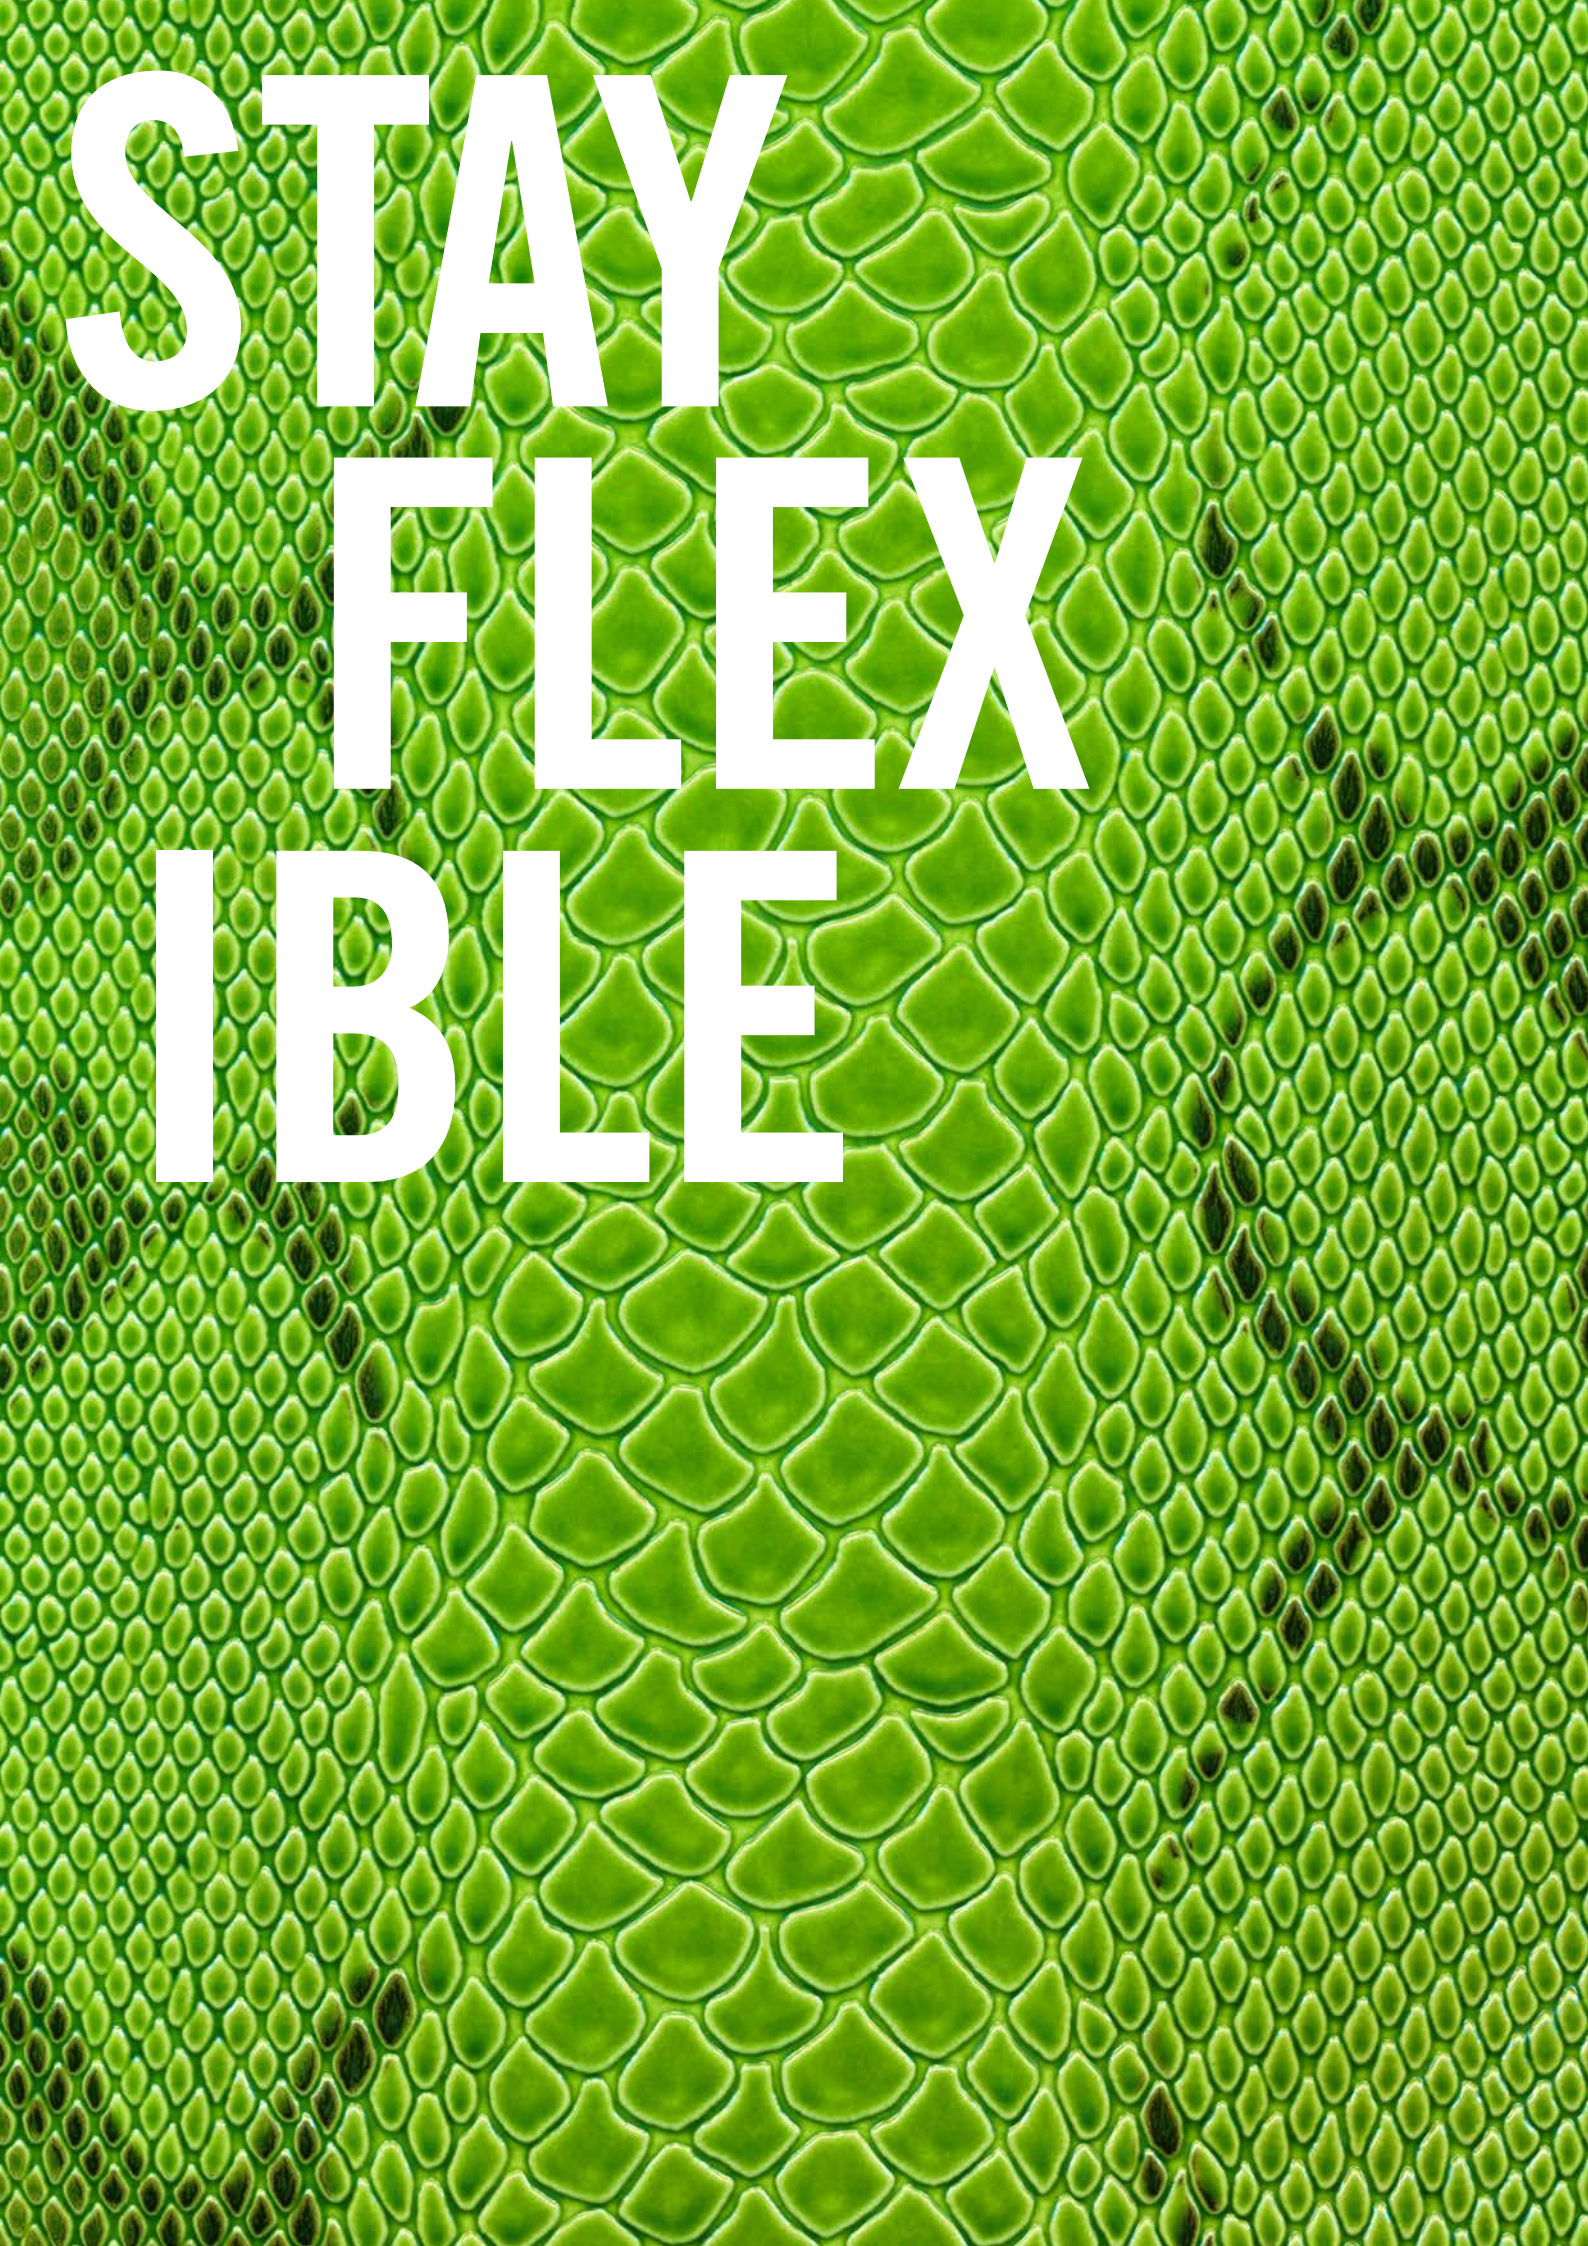

**STAY  
FLEX  
IBLE**



# CONTENT

---

<b>OCTAWALL 40</b>	<b>6</b>
<b>OCTAWALL 40 CLASSIC</b>	<b>8</b>
Technical features	10
Components	12
<b>OCTAWALL 40 TOOLLESS</b>	<b>16</b>
Technical features	18
Components	20





# LIGHT FAST EASY

**A SYSTEM THAT FITS EVERYWHERE.**

Minimum effort, maximum possibilities: Here comes a slim system that easily adapts to all requirements. Carefully designed down to the smallest detail and full of sophisticated ideas. A large number of intelligent innovations offer countless possibilities. Delicate frames, seamlessly covered with fabric – including curved frame elements and corners. OCTAwall 40 is always ready for use – everywhere.





No matter if you need it for your exhibition stand, for the creation of a display or a POS. Easy to transport and set up in no time. An efficient and neat solution for your display or trade show appearance. Are you looking for a system that is compact, light and versatile at the same time? You have just found one!





# ADAPTABLE ELABORATE UNIQUE

IN EVERY DETAIL

Too many individual parts? Too complicated? Not so with OCTAwall 40 classic. Reduced to the most important components, the system offers refreshing simplicity. Simple, elaborate and therefore unique. From design to assembly. A single door for DIN right and left and can be opened both to the inside and the outside.



## OCTAWALL 40 CLASSIC



The T-connector allows you to install ceilings and perpendicular walls even at a later date. These and many other intelligent innovations will help facilitate your trade show routine. OCTAWall 40 classic is your guide through the world of exhibition.





# OCTA WALL 40<sup>CLASSIC</sup>




# TECHNICAL FEATURES

## OCTAwall 40 classic



lightweight



fabric + panel



fabric + fabric




easy corner  
connection



curved walls



magnetic holder



T-connector for  
ceiling/walls



silicone edge  
graphics



almost seamless  
fabric corner

### Flexible. Without interruption.

Thanks to the new S 382 corner extrusion, there is no visible corner upright. The straight corner and minimalistic design allow for around-the-corner graphics, offering maximum advertising space.

### Curved walls for more freedom.

Curved frames with all-round graphics - totally seamless. This creates maximum advertising space uninterrupted by extrusions. Rooms will appear in a completely new light. Not only from the outside, but also from the inside. OCTAwall classic can be equipped with acoustic fabric. No matter if used as a conference room or a place of retreat – with this system, the choice is yours.

### Short-term modifications? No problem.

If you forgot something during the planning phase or have to make changes onsite: The W 466 T-connector allows you to install and shift perpendicular walls without the need of a connection extrusion. This way, your booth can easily be adapted to local conditions despite its system construction. Apart from walls, complete ceiling elements can be installed.

### 1 beam. 2 magnets. An invisible connection.

Literature racks and shelves can be attached without visible fixtures: magnetically to a beam mounted between uprights behind the fabric. Allowing you to display up to 2 kg at any height – no tools required.

### Wallwasher for perfect illumination!

Completely shadow-free all the way to the floor. With our Wallwasher M 1497, an area of W 1500 × H 2500 mm gets evenly illuminated. Just perfect for highlighting advertising messages.



## OCTAWALL 40 CLASSIC

Elegant aluminium surface | with system groove | extremely lightweight | for single- or double-sided fabric or fabric/panel | with or without mitres | for silicone edge graphics

### OCTAWALL 40 CLASSIC FRAME, 950 × 2480 MM




Frame  
custom size:  
W 444/E

#### W 442/E.01

**Aluminium** | 1 × frame of W 906 for double sided fabric/ panel, for installation between 2 extrusions, incl. 2 × C 440/F adjustable foot and mounting-set M 1477, incl. hook tape W 840, with 4 × internal corner connector W 916 (no mitre needed), with drillings for M 1951 and M 1953  
7.76 kg | W 950 × H 2480 × D 40 mm

Drillings for cable management available on request

**Without fabric/print**



### OCTAWALL 40 CLASSIC FRAME DIVIDABLE, 950 × 2480 MM




#### W 932.01

**Aluminium** | 1 × frame of M 1307 for double sided fabric, dividable in the centre, incl. 2 × C 440/F adjustable foot and 4 × mounting-set M 1477, with 4 × corner connector Z 990, with drillings for M 1951 and M 1953

8.08 kg | W 950 × H 2480 × D 40 mm

Drillings for cable management available on request

**Without fabric/print**



### OCTAWALL 40 CLASSIC FRAME CURVED, 495 × 2480 MM




When combining  
several curved  
frames, deviations  
may occur at the  
joints.

#### W 441/E.01

**Aluminium** | 1 × frame of W 906 for double sided fabric/ panel, for mounting on frame or 2 extrusion, incl. 2 × C 440/F adjustable foot and 3 × mounting-set M 1477, incl. hook tape W 840, with 4 × internal corner connector W 916 (no mitre needed), with drillings for M 1951 and M 1953  
7.74 kg | W 495 × H 2480 × D 40 mm

Drillings for cable management available on request

**Without fabric/print**









## OCTAWALL 40 CLASSIC

Elegant aluminium surface | with system groove | extremely light weight | for single- or double-sided fabric or fabric/panel | with or without mitres | for silicone edge graphics

### OCTAWALL 40 CLASSIC DOOR ELEMENT, UNIVERSAL



Attention:  
Only for silicone  
edge 12 × 3 mm!


Door  
custom size:  
W 425So

#### W 425-SET.01

**Aluminium/Steel** | 1 × door element of M 1305/W 906, for double-sided fabric/panel, universal for DIN left/right, consisting of door leaf frame, door upright frame incl. threshold plate and door roof frame, with hook tape W 840, with dead lock cylinder W 514

outer frame dimension door leaf frame: 855 × 2021 mm  
outer frame dimension door frame (top): 870 × 450 mm

18.7 kg | B 950 × W 2500 × D 40 mm



### OCTAWALL 40 CLASSIC WINDOW ELEMENT, FOR DOOR W 425 / W 575





#### W 414.01

**Aluminium** | 1 × window element made of W 906 for double sided fabric/panel, in addition to door element W 425 and W 575

Window size: W 200 × H 800 mm

5 kg | W 775 × H 1941 × D 40 mm

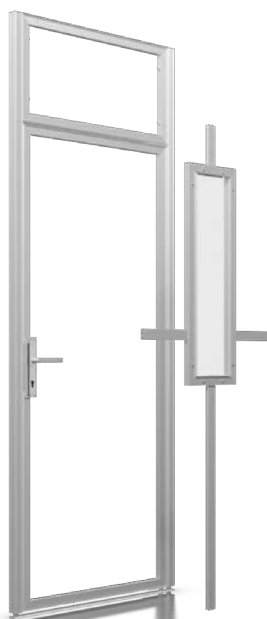



## PARTS

### OCTAwall 40 classic




#### OCTAWALL 40 CLASSIC CEILING ELEMENT, STACKED 950 × 2480 MM



#### D 931.01

**Aluminium** | 1 × frame of M 1305 used as ceiling element, for fabrics in combination with silicone edge M 1313, incl. 4 × connector Z 910 for system groove

10.17 kg | L 950 × W 2480 × H 40 mm



**i** For flush mounting of ceiling element: 4 × T-connector W 466


#### OCTAWALL 40 CLASSIC WALLWASHER



#### M 1497

**Aluminium** | for uniform illumination of 1000 mm width and 2500 mm height (5700 Kelvin > Cri 90, 3600 lm, 28 W, 125 lm/W), for 230 V power source, for system groove 4.3 mm, space-saving and securely packed, with 16 high-power LEDs, PSU incl. cable (to the light 500 mm and from the power supply 2500 mm)

2.04 kg | L 812 × W 166 × H 263 mm







# **SIMPLE SPACE-SAVING READY TO USE**

## **A SHOW-STOPPER OF A CLICK SYSTEM**

Sometimes results are just a few clicks away – not only in the digital world. OCTAwall 40 toolless frames can be assembled without any tools. The extrusion design gives you the freedom to choose either fabric or panel. A universal door adds to the flexibility of the system. To ensure that nothing is forgotten, all frame components are conveniently packed





in a roll-up bag. This translates into savings in time, storage and transport costs. Roll out the bag. Put the extrusions together. Attach fabric or panel. Done. Keep it simple – that's the golden thread running through OCTAWall 40 toolless.








# TECHNICAL FEATURES

## OCTAwall 40 toolless



lightweight



fabric + panel



silicone edge  
graphics



plugable connection



shoulder bag

### **Quick and easy – of course you can have both.**

Unpack. Plug together. Done. Thanks to the new spring mechanism, the OCTAwall 40 toolless frame is set up in no time at all. Firmly screwed to the extrusion on one side, the connector snaps in on the other with a \*click\*. Easy and time saving – a completely toolless installation.

### **Everything within your grasp thanks to a handy bag.**

Many changes of location within a very short time? The shoulder bag accompanies you wherever you go. It holds all extrusions required for one frame, safely rolled up and protected against scratches. No more forgotten parts or transport problems.

### **Main application: everything.**

Fairs, events, POS, or exhibitions: OCTAlumina 40 can be used for all kinds of decorative or presentation purposes – even in combination with OCTAlumina and Maxima 40.

### **Today fabric - tomorrow panel.**

The high quality hook and loop tape impresses with the safe and toolless installation of the panels. The well-proven system groove and silicone edge system adds tension to your fabric. Together, they offer a modern surface look and utmost flexibility.



## OCTAWALL 40 TOOLLESS

Elegant aluminium surface | with system groove | with toolless connection | extremely lightweight | for double-sided fabric/panel | without mitres | for silicone edge graphics




Attention:  
freestanding only  
for double-sided  
fabric



Frame  
custom size:  
W 403M

### OCTAWALL 40 TOOLLESS FRAME, 950 × 2480 MM




#### W 402M.01

**Aluminium** | 1 × frame of W 906, for double-sided fabric, with plugable connection, incl. 2 × rotatable foot plates M 1956 and 1 × bracing, incl. 1 × shoulder bag W 494, 4 × corner connector W 916M, 2 × connector OL 240M, 3 × mounting-set M 1496

8.93 kg | W 950 × H 2480 × D 40 mm


Drillings for cable management available on request

**Without fabric/print**



Frame  
custom size:  
W 413M

### OCTAWALL 40 TOOLLESS FRAME, 950 × 2480 MM




#### W 412M.01

**Aluminium** | 1 × frame of W 906, for double-sided fabric/panel, with plugable connection, incl. 2 × adjustable foot C 440/F and 1 × bracing, incl. 1 × shoulder bag W 494, 4 × corner connector W 916M, 2 × connector OL 240M, 3 × mounting-set M 1496, optional with hook tape W 840

8.11 kg | W 950 × H 2480 × D 40 mm

Drillings for cable management available on request

**Without fabric/print**



### OCTALUMINA 40 LIGHT FRAME, 950 × 2480 MM




#### OL 415.01

**Aluminium** | 1 × frame element single-sided illuminated of M 1970, with system groove, aluminium composite panel with LED modules mounted, incl. 2 m cable with plug, with 2 × adjustable foot

26.76 kg | W 950 × H 2480 × D 40 mm

**Without fabric/print**



Attention:  
Only for silicone  
edge 12 × 3 mm!


### OCTAWALL 40 TOOLLESS DOOR ELEMENT UNIVERSAL, DIVIDABLE IN CENTER



#### W 425M-SET.01

**Aluminium** | 1 × door element of M 1305/W 906, for double-sided fabric/panel, plug-in connection (middle), for DIN left/right, consisting of door leaf frame - door upright frame incl. threshold plate and door upperframe, with dead lock cylinder W 514  
optional: transport bag W 425, hook tape W 840  
outer dimension door leaf frame: 855 × 2021 mm  
outer dimension door frame (top): 870 × 450 mm

20.7 kg | W 950 × H 2500 × D 40 mm






## PARTS

OCTAwall 40 toolless







EXHIBITION SYSTEMS  
PROJECT SOLUTIONS  
PRESENTATION  
INTERIOR DESIGN  
CLEANROOM SYSTEMS







---

**OCTANORM® Germany**  
**Head Office**

Raiffeisenstraße 39  
70794 Filderstadt  
T. +49 711 77003-0  
F. +49 711 77003-53  
info@octanorm.de  
www.octanorm.com

---

**EUROPE**

**OCTANORM® Nordic**  
T. +46 8 621 6500  
www.octanorm.se

**OCTANORM® Polska**  
T. +48 22 773 0350  
www.octanorm.pl

**OCTANORM® Belgium**  
T. +32 475 35 60 76  
www.octanorm.be

**OCTANORM® France**  
T. +33 6 79 11 32 05  
www.octanorm.fr

**OCTANORM® UK**  
T. +44 20 85 45 2945  
www.octanorm.co.uk

**OCTANORM® Espana**  
T. +34 930 019 424  
www.octanorm.es

**OCTANORM® Hellas**  
T. +30 2310 79 6521  
www.octanorm.gr

**OCTANORM® Italia**  
T. +39 031 2269715  
www.octanorm.it

**OCTANORM® Adria**  
T. +386 590 56301  
www.octanormadria.com

---

**AFRICA**

**OCTANORM® Nigeria**  
T. +234 8030 8211 91  
www.it-al.design

**OCTANORM® South Africa**  
T. +27 11 433 2010  
www.octanorm.co.za

---

**AMERICA**

**OCTANORM® North America**  
T. +1 770 7 32 1520  
www.octanormna.com

**OCTANORM® México**  
T. +52 55 5804 6325  
www.octanorm.com.mx

---

**AUSTRALIA**

**OCTANORM® Australia**  
T. +61 3 7017 2753  
www.octanorm.com.au

---

**ASIA**

**OCTANORM® China**  
T. +86 512 6283 3336  
www.octanorm.cn

**OCTANORM® Japan**  
T. +81 45 511 8144  
www.octanorm.co.jp

---

**MIDDLE EAST**

**OCTANORM® Emirates**  
T. +971 4 340 6888  
www.octanormemirates.net