

OCTA WALL 40


CLASSIC | TOOLLESS

THE LIGHT WEIGHT
SYSTEM



DIV ERSITY

Lianas. Birds of Paradise. Centipedes. The tropical rainforest is home to more than 30 million animal and plant species. Living together in perfect harmony and finely adapted to the conditions. 12 hours of sunlight every day. Rainfall in all seasons. Multistorey construction. From soil to crown, no matter the layer, each organism is developed for a particular task. Provide shade. Store water. Absorb CO₂. Dead plants are immediately transformed into nutrients and recombined into something new. This is the only way to create such an immense variety of species. So the question is not whether to take advantage of the versatility or not. But: How do we need to create the basic components of a system to achieve maximum diversity? Here are some inspiring answers.

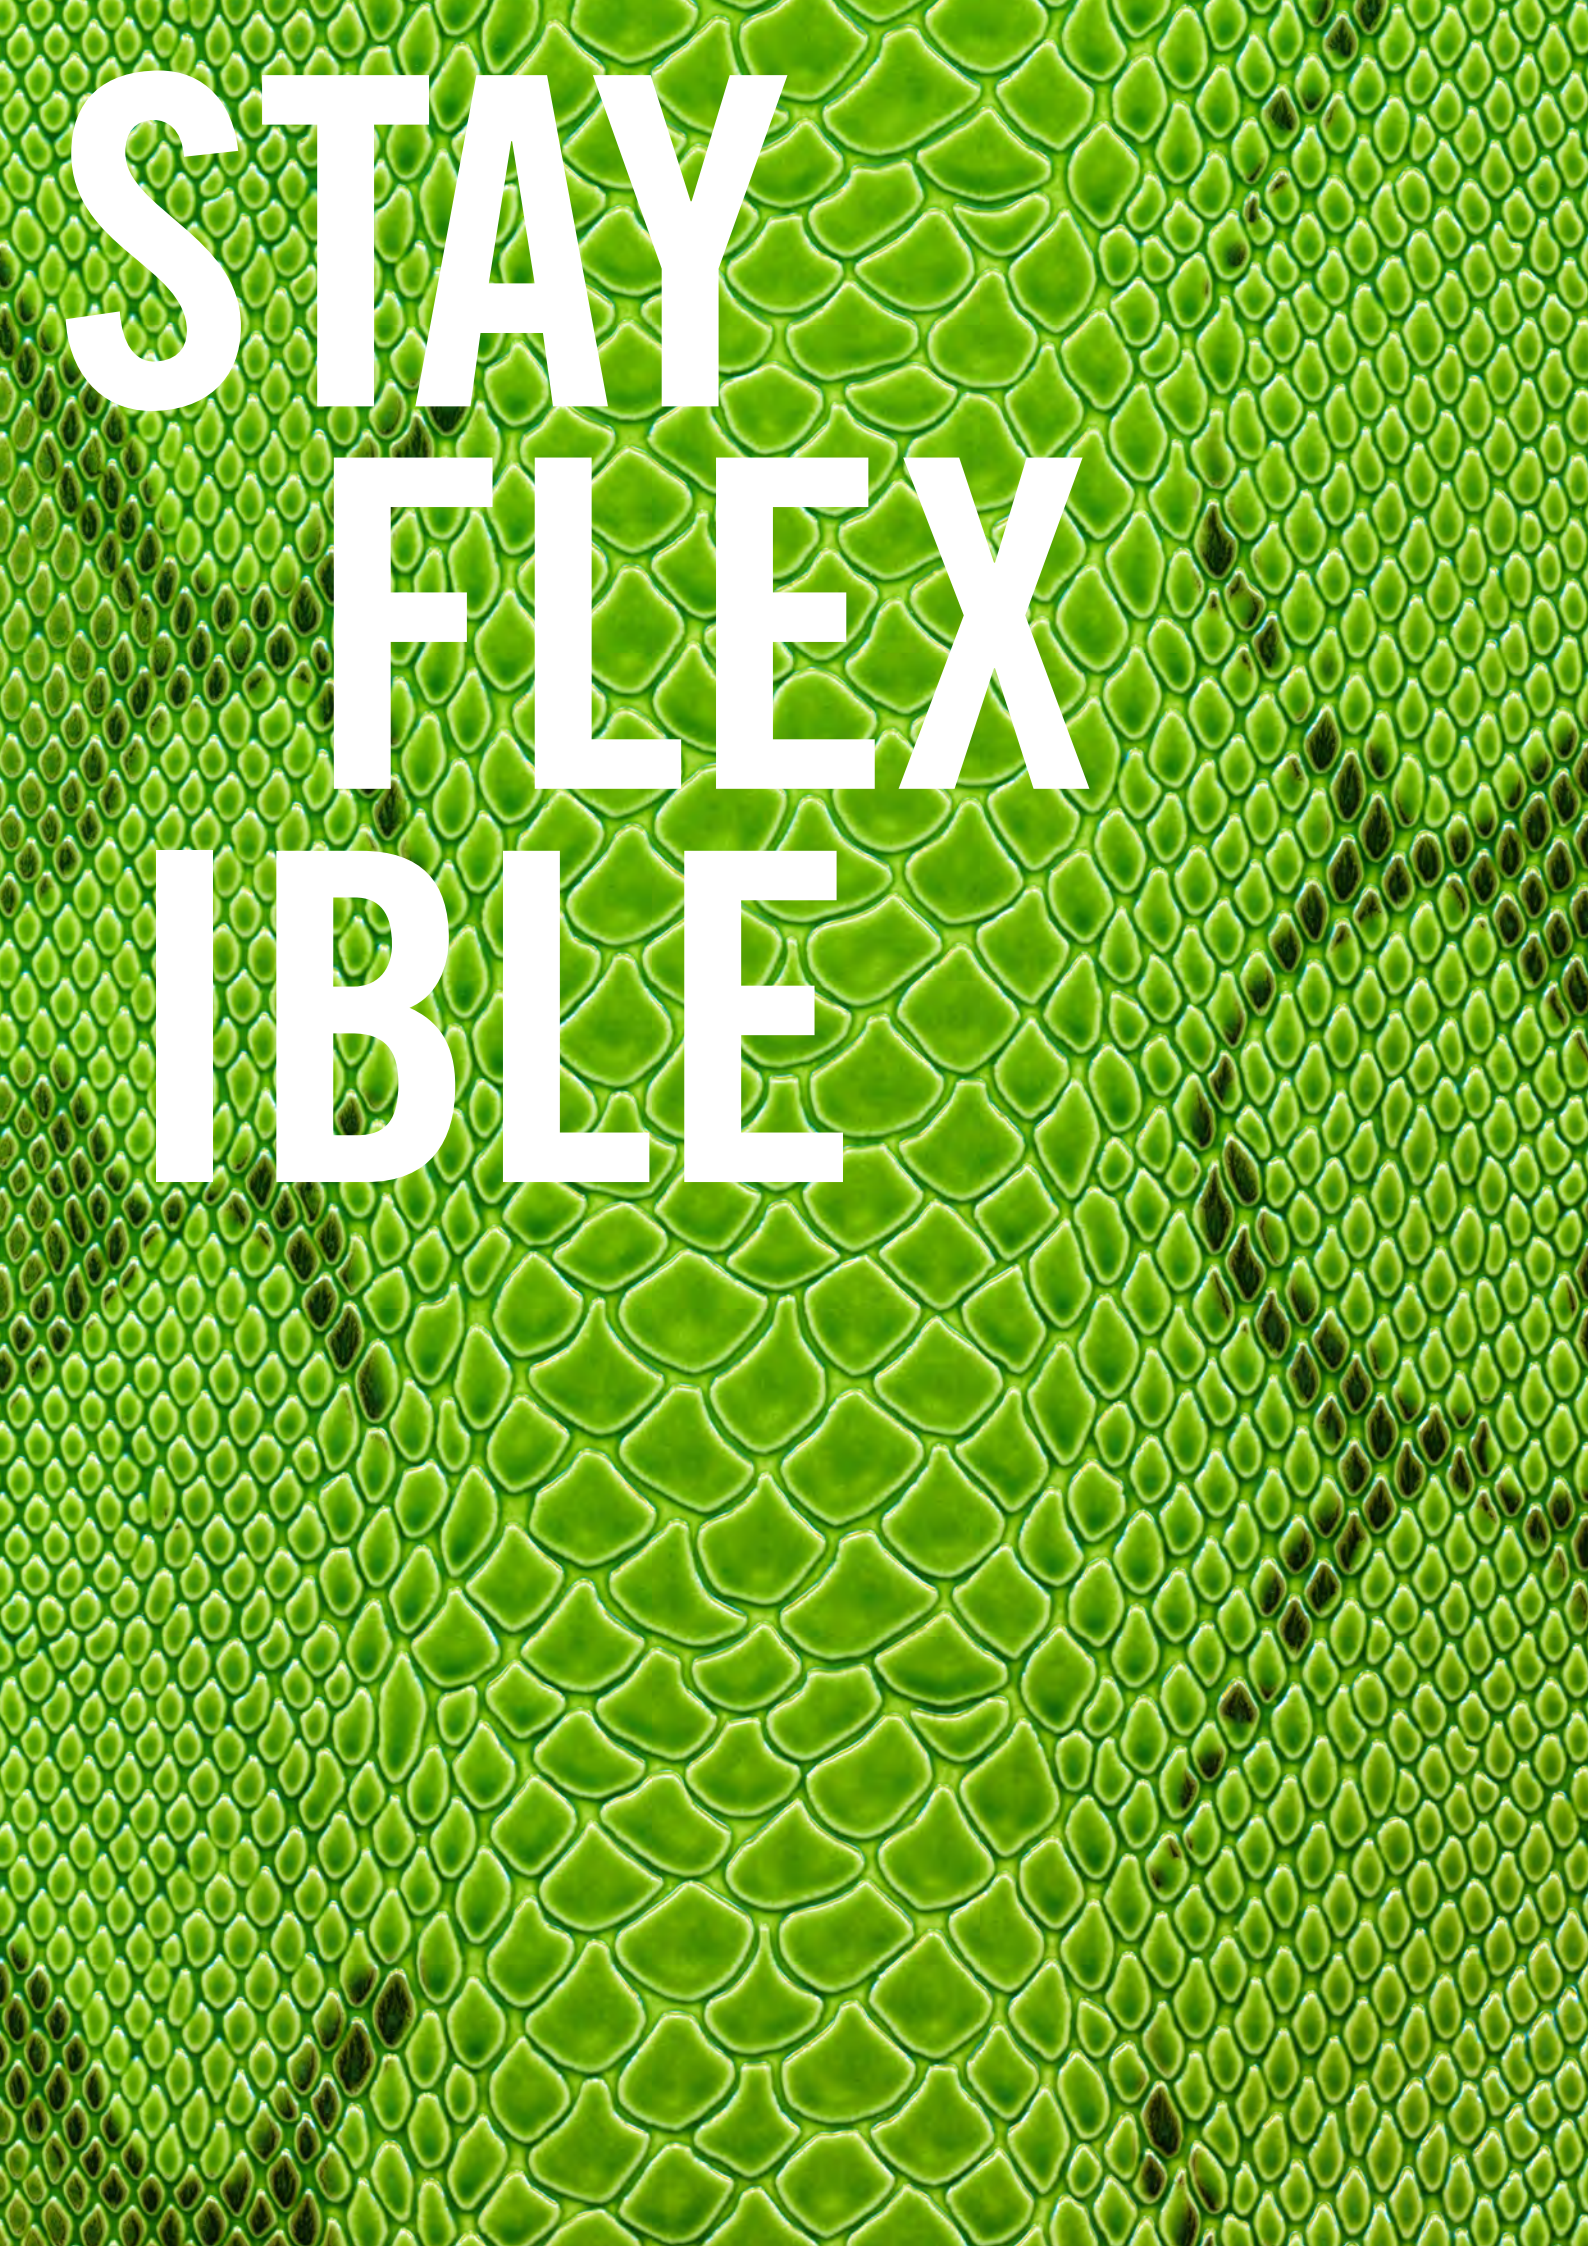

STAY
FLEX
IBLE

CONTENT

OCTAWALL 40	6
OCTAWALL 40 CLASSIC	8
Technical features	10
Components	12
OCTAWALL 40 TOOLLESS	16
Technical features	18
Components	20
OCTASKETCH	22
Technical features	24



LIGHT FAST EASY

A SYSTEM THAT FITS EVERYWHERE.

Minimum effort, maximum possibilities: Here comes a slim system that easily adapts to all requirements. Carefully designed down to the smallest detail and full of sophisticated ideas. A large number of intelligent innovations offer countless possibilities. Delicate frames, seamlessly covered with fabric – including curved frame elements and corners. Planned online with a web-based software. OCTAwall 40 is always ready for use – everywhere.



No matter if you need it for your exhibition stand, for the creation of a display or a POS. Easy to transport and set up in no time. An efficient and neat solution for your display or trade show appearance. Are you looking for a system that is compact, light and versatile at the same time? You have just found one!



ADAPTABLE ELABORATE UNIQUE

IN EVERY DETAIL

Too many individual parts? Too complicated? Not so with OCTAwall 40 classic. Reduced to the most important components, the system offers refreshing simplicity. Simple, elaborate and therefore unique. From design to assembly. The web-based OCTAsketch software with drag and drop function provides perfect planning. The best thing about it? The result is

OCTAWALL 40 CLASSIC



shown immediately. A single door for DIN right and left and can be opened both to the inside and the outside. The T-connector allows you to install ceilings and perpendicular walls even at a later date. These and many other intelligent innovations will help facilitate your trade show routine. OCTAwall 40 classic is your guide through the world of exhibition.



OCTA WALL 40^{CLASSIC}

TECHNICAL FEATURES


OCTAwall 40 classic



Lightweight



OCTAsketch
planning software



Fabric + panel



Fabric + fabric




Easy corner
connection



Curved walls




Magnetic holder



T-connector for
ceiling/walls



Silicone edge
graphics



Almost seamless
fabric corner

Flexible. Without interruption.

Thanks to the new S 382 corner extrusion, there is no visible corner upright. The straight corner and minimalistic design allow for around-the-corner graphics, offering maximum advertisement space.

Curved walls for more freedom.

Curved frames with all-round graphics - totally seamless. This creates maximum advertising space uninterrupted by extrusions. Rooms will appear in a completely new light. Not only from the outside, but also from the inside. OCTAwall classic can be equipped with acoustic fabric. No matter if used as a conference room or a place of retreat – with this system, the choice is yours.

Short-term modifications? No problem.

If you forgot something during the planning phase or have to make changes onsite: The W 466 T-connector allows you to install and shift perpendicular walls without the need of a connection extrusion. This way, your booth can easily be adapted to local conditions despite its system construction. Apart from walls, complete ceiling elements can be installed.

1 beam. 2 magnets. An invisible connection.

Literature racks and shelves can be attached without visible fixtures: magnetically to a beam mounted between uprights behind the fabric. Allowing you to display up to 2 kg at any height – no tools required.

OCTAWALL 40 CLASSIC

Elegant aluminium surface | with system groove | extremely lightweight | for single- or double-sided fabric or fabric/panel | with or without mitres | for silicone edge graphics

OCTAWALL 40 CLASSIC FRAME, 950 × 2480 MM




Frame
custom size:
W 444/E

W 442/E.01

Aluminium | 1 × frame of W 906, for double-sided fabric/panel, incl. 2 × adjustable foot C 440/F, 3 × mounting-set M 1477, internal corner connector W 916 (no mitre needed) and hook tape W 840
7.76 kg | W 950 × H 2480 mm

Drillings for cable management available on request

Without fabric/print



OCTAWALL 40 CLASSIC FRAME, 950 × 2480 MM




Frame
custom size:
W 944

W 934.01

Aluminium | 1 × frame of M 1307, for double-sided fabric, incl. 2 × adjustable foot C 440/F, 6 × mounting-set M 1477 and internal corner connector Z 990 (with mitre cut)
6.88 kg | W 950 × H 2480 mm

Drillings for cable management available on request

Without fabric/print



OCTAWALL 40 CLASSIC FRAME DIVIDABLE, 950 × 2480 MM




W 932.01

Aluminium | 1 × frame of M 1307, for double-sided fabric, dividable for transport, incl. 2 × adjustable foot C 440/F, 4 × mounting-set M 1477 and internal corner connector Z 990 (with mitre cut)
8.08 kg | W 950 × H 2480 mm

Drillings for cable management available on request

Without fabric/print



OCTAWALL 40 CLASSIC FRAME CURVED, 495 × 2480 MM




W 441/E.01

Aluminium | 1 × frame of W 906, for double-sided fabric/panel, incl. 2 × adjustable foot C 440/F, 3 × mounting-set M 1477, internal corner connector W 916 (no mitre needed) and hook tape W 840

7.74 kg | W 495 × H 2480 mm

Drillings for cable management available on request

Without fabric/print







OCTAWALL 40 CLASSIC

Elegant aluminium surface | with system groove | extremely light weight | for single- or double-sided fabric or fabric/panel | with or without mitres | for silicone edge graphics

OCTAWALL 40 CLASSIC CEILING ELEMENT, STACKED 950 × 2480 MM


D 931.01

Aluminium | 1 × ceiling frame of M 1305, for fabric with silicone edge M 1313, incl. 4 × connector for system groove

10.17 kg | W 950 × H 2480 mm



i For flush mounting
of ceiling element:
4 × T-connector
W 466



PARTS

OCTAwall 40 classic



OCTAWALL 40 CLASSIC DOOR ELEMENT UNIVERSAL




W 415.01

Aluminium | 1 x door element, universal, suitable for DIN left and DIN right, inward and outward opening, consisting of door and door frame (roof light, cladable extrusions and threshold plate), incl. hook tape W 840, without dead lock cylinder W 514

19.50 kg | W 950 x H 2480 mm


Drillings for cable management available on request

Without fabric/print 



i Door
custom size:
W 415So


OCTAWALL 40 CLASSIC WINDOW ELEMENT, FOR DOOR ELEMENT W 415



W 414.01

Aluminium | 1 x window element, in addition to door element W 415, width of horizontal beams matches the width of the door element

Window size: W 200 x H 800 mm





SIMPLE SPACE-SAVING READY TO USE

A SHOW-STOPPER OF A CLICK SYSTEM

Sometimes results are just a few clicks away – not only in the digital world. OCTAwall 40 toolless frames can be assembled without any tools. The extrusion design gives you the freedom to choose either fabric or panel. A universal door adds to the flexibility of the system. To ensure that nothing is forgotten, all frame components are conveniently packed



in a roll-up bag. This translates into savings in time, storage and transport costs. Roll out the bag. Put the extrusions together. Attach fabric or panel. Done. Keep it simple – that's the golden thread running through OCTAwall 40 toolless.

**OCTA
WALL
40^{TOOLLESS}**

TECHNICAL FEATURES


OCTAwall 40 toolless



Lightweight



OCTAsketch
planning software



Fabric + panel



Silicone edge
graphics



Plugable connection



Shoulder bag

Quick and easy – of course you can have both.

Unpack. Plug together. Done. Thanks to the new spring mechanism, the OCTAwall 40 toolless frame is set up in no time at all. Firmly screwed to the extrusion on one side, the connector snaps in on the other with a *click*. Easy and time saving – a completely toolless installation.

Everything within your grasp thanks to a handy bag.

Many changes of location within a very short time? The shoulder bag accompanies you wherever you go. It holds all extrusions required for one frame, safely rolled up and protected against scratches. No more forgotten parts or transport problems.

Main application: everything.

Fairs, events, POS, or exhibitions: OCTAlumina 40 can be used for all kinds of decorative or presentation purposes – even in combination with OCTAlumina and Maxima 40.

Today fabric - tomorrow panel.

The high quality hook and loop tape proves itself through the safe and toolless installation of panels. The well-proven system groove and silicone edge system adds tension to your fabric. Together, they offer a modern surface look and utmost flexibility.

OCTAWALL 40 TOOLLESS

Elegant aluminium surface | with system groove | with toolless connection | extremely lightweight | for double-sided fabric/ panel | without mitres | for silicone edge graphics



Attention:
freestanding only
for double-sided
fabric



Frame
custom size:
W 403M

OCTAWALL 40 TOOLLESS FRAME, 950 × 2480 MM




W 402M.01

Aluminium | 1 × freestanding frame of W 906, for double-sided fabric, with plugable connection, incl. 2 × rotatable foot plates M 1956 and 1 × bracing, incl. shoulder bag W 494, 4 × corner connector W 916M, 2 × connector OL 240M, 3 × mounting-set M 1496
8.93 kg | W 950 × H 2480 mm

Drillings for cable management available on request

Without fabric/print



OCTAWALL 40 TOOLLESS FRAME, 950 × 2480 MM




Frame
custom size:
W 413M

W 412M.01

Aluminium | 1 × frame of W 906, for double-sided fabric/ panel, with plugable connection, incl. 2 × adjustable foot C 440/F and 1 × bracing, incl. shoulder bag W 494, 4 × corner connector W 916M, 2 × connector OL 240M, 3 × mounting-set M 1496 and hook tape W 840
8.11 kg | W 950 × H 2480 mm

Drillings for cable management available on request

Without fabric/print




OCTALUMINA 40 LIGHT FRAME, 950 × 2480 MM



OL 415.01

Aluminium | 1 × frame with 40 mm extrusion width, with system groove, aluminium composite panel with LED modules mounted, incl. 2 m cable with plug, with adjustable foot, for single-sided backlit graphics
26.76 kg | W 950 × H 2480 mm

Without fabric/print



OCTAWALL 40 TOOLLESS DOOR ELEMENT UNIVERSAL, DIVIDABLE IN CENTER




W 415M.01

Aluminium | 1 × door element, with pluggable connection, universal, suitable for DIN left and DIN right, inward and outward opening, without dead lock cylinder W 514, optional: bag W 925, hook tape W 840
20.42 kg | W 950 × H 2480 mm

Drillings for cable management available on request


Without fabric/print



PARTS

OCTAwall 40 toolless



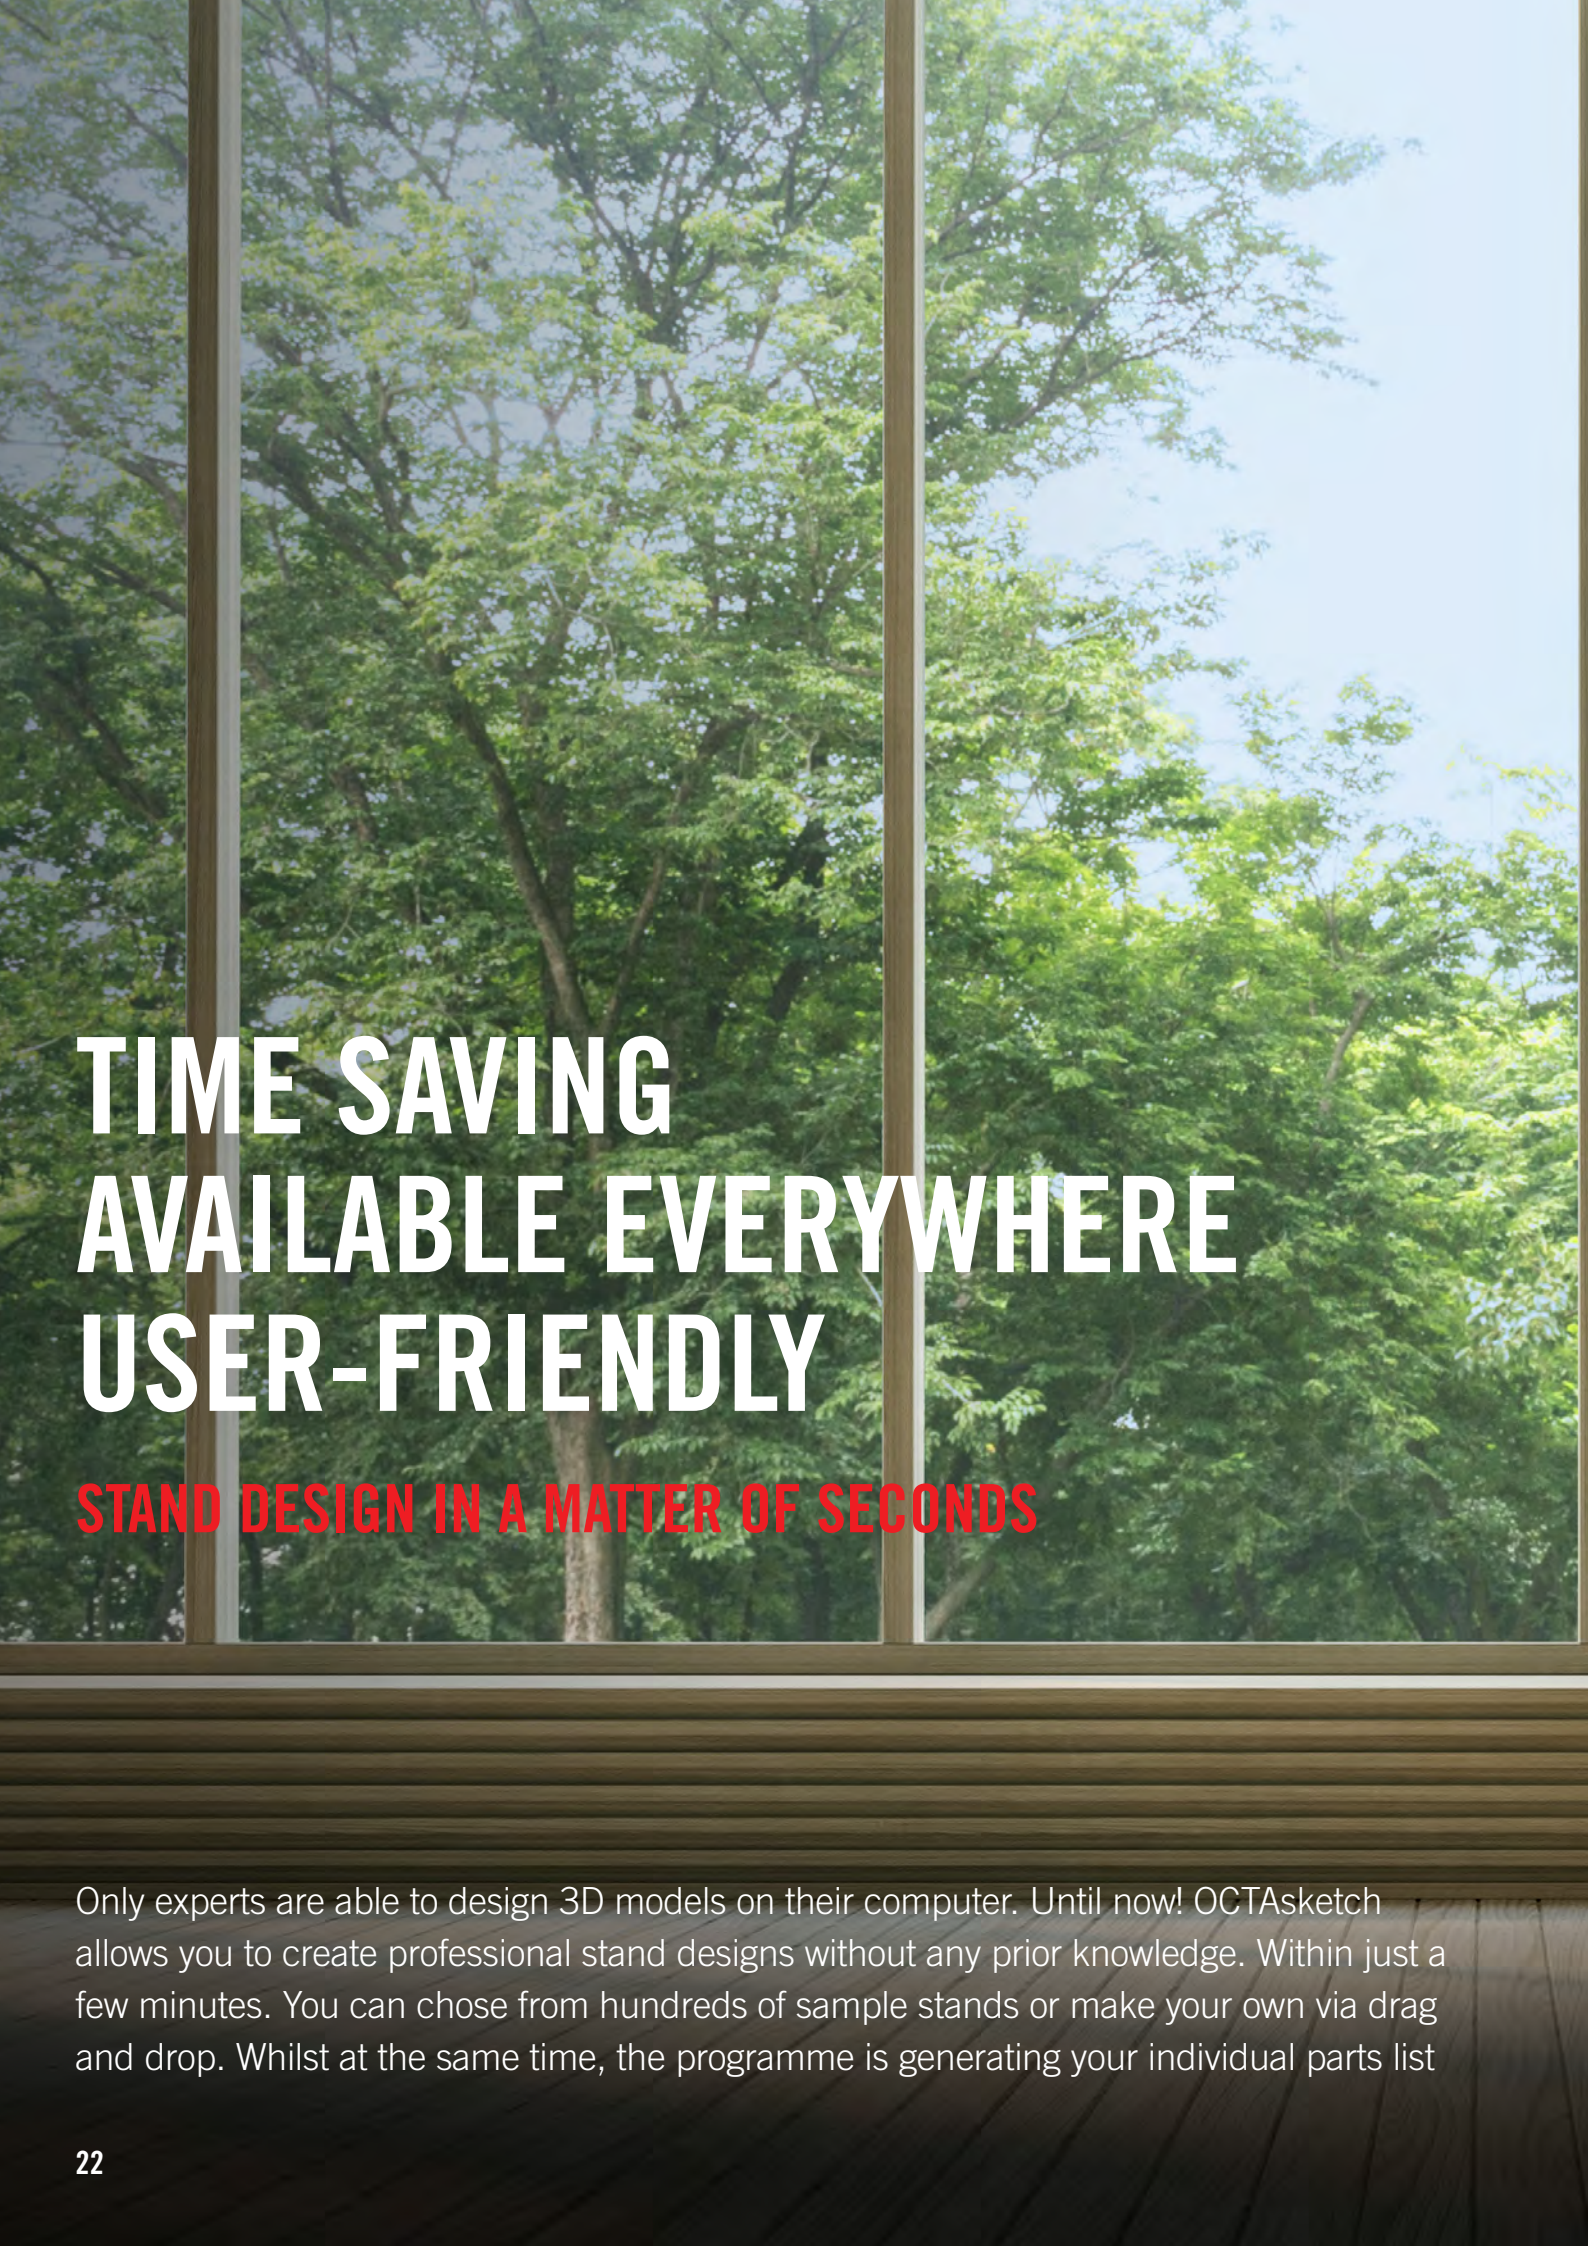

TIME SAVING AVAILABLE EVERYWHERE USER-FRIENDLY

STAND DESIGN IN A MATTER OF SECONDS

Only experts are able to design 3D models on their computer. Until now! OCTAsketch allows you to create professional stand designs without any prior knowledge. Within just a few minutes. You can choose from hundreds of sample stands or make your own via drag and drop. Whilst at the same time, the programme is generating your individual parts list




together with the corresponding request for quotation. OCTAsketech is web based and requires no installation, so you will be able to get started right away.


Go get it at: www.octasketch.net



Web based
software



Large library of stands



Drag and drop



Automated project
folder



EXHIBITION SYSTEMS
PROJECT SOLUTIONS
PRESENTATION
INTERIOR DESIGN
CLEANROOM SYSTEMS

OCTANORM® Germany
Head Office

Raiffeisenstraße 39
70794 Filderstadt
T. +49 711 77003-0
F. +49 711 77003-53
info@octanorm.de
www.octanorm.com

EUROPE

OCTANORM® Belgium
T. +32 2 344 9880
www.octanorm.be

OCTANORM® France
T. +33 1 4695 5406
www.octanorm.fr

OCTANORM® UK
T. +44 20 85 45 2945
www.octanorm.co.uk

OCTANORM® Hellas
T. +30 2310 79 6521
www.octanorm.gr

OCTANORM® Italia
T. +39 02 9645 1966
www.octanorm.it

OCTANORM® Nederland
T. +31 50 309 5133
www.octanorm.nl

OCTANORM® Polska
T. +48 22 773 0350
www.octanorm.pl

OCTANORM® Adria
T. +386 590 56301
www.octanormadria.com

OCTANORM® Espana
T. +34 930 019 424
www.octanorm.es

OCTANORM® Nordic
T. +46 8 621 6500
www.octanorm.se

OCTANORM® Russia
T. +7 495 565 7920
www.octanorm.ru

AMERICA

OCTANORM® North America
T. +1 770 7 32 1520
www.octanormna.com

OCTANORM® México
T. +52 55 5804 6325
www.octanorm.com.mx

OCTANORM® Brasil
T. +55 11 3807 2552
www.octanorm.com.br

OCTANORM® Argentina
T. +54 11 43 12 4000
www.octanorm.com.ar

AFRICA

OCTANORM® South Africa
T. +27 11 433 2010
www.octanorm.co.za

MIDDLE EAST

OCTANORM® Emirates
T. +971 4 340 6888
www.octanormemirates.net

AUSTRALIA

OCTANORM® Australia
T. +61 3 8773 8550
www.octanorm.com.au

ASIA

OCTANORM® Japan
T. +81 45 511 8144
www.octanorm.co.jp

OCTANORM® China
T. +86 512 6283 3336
www.octanorm.cn