




PRODUCT INFO

Quarter-round extrusion M 260

AW 7974.GB_QUARTER-ROUND EXTRUSION M 260_02/2023

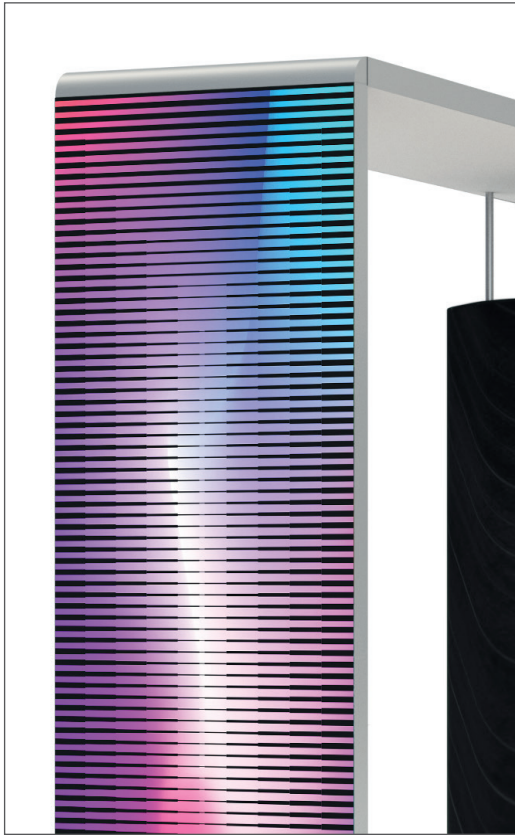


- soft transitions at a 90° angle
- vertically installed as a round corner between two frames
- horizontally installed as a transition between a wall and a ceiling frame
- compatible with OCTANORM extrusions with a tension lock and a system width of 16, 40, 80 or 120 mm (e.g. OCTAwall 40, OCTAwall pro, Maxima and OCTALumina)

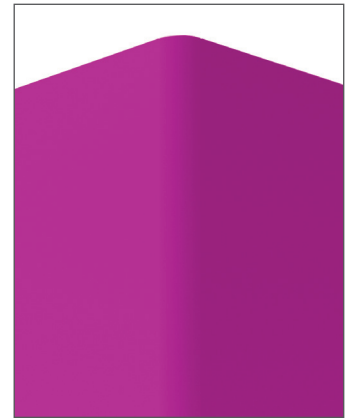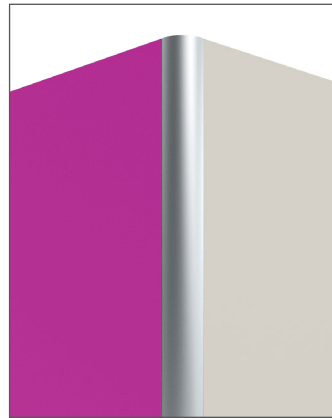

QUARTER-ROUND EXTRUSION

M 260



Aluminium I for connecting extrusions with a tension lock and a system width of 16, 40, 80 or 120 mm and fabric covered OCTAwall pro and OCTAwall 40 frames, fabric can be stretched over the extrusion

W 120 × H 120 mm, 6000 mm long
25.36 kg

