


OCTA WALL


PRO

STARTER
KITS

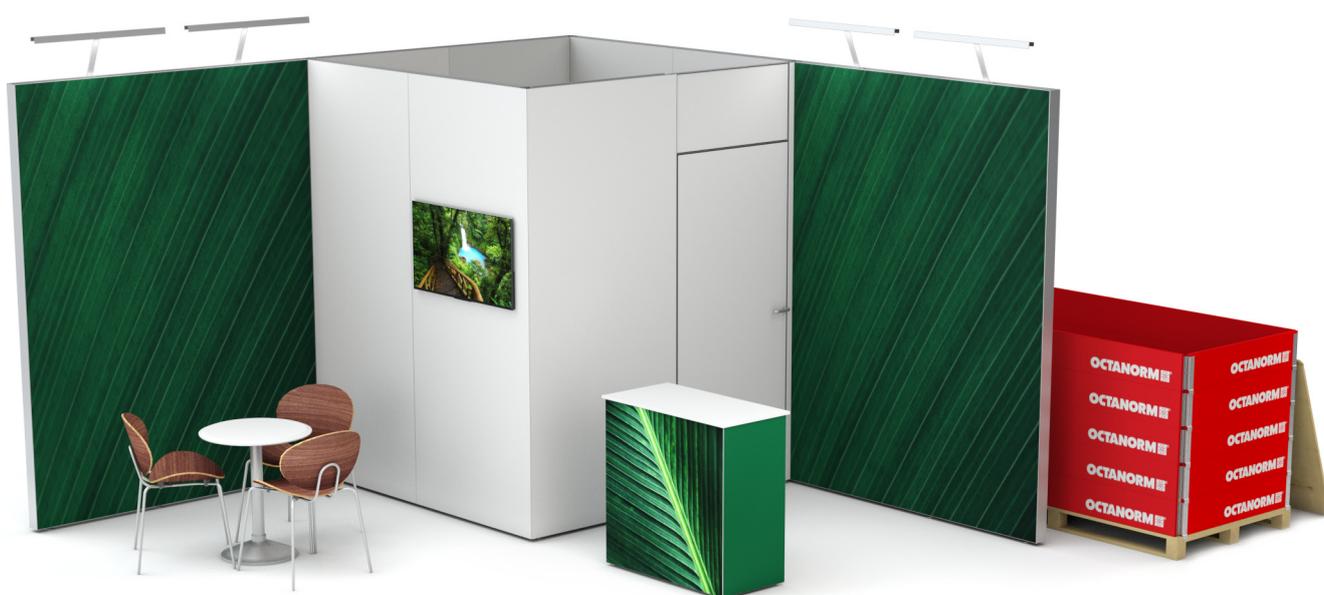

OCTAWALL PRO

STARTER KITS

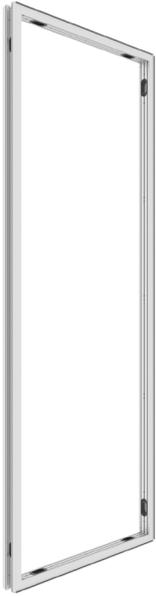

COMPLETE SETS: ALWAYS COMBINABLE IN NEW WAYS –THE BASIS FOR CREATIVE DESIGNS

OCTAwall pro – stable, compact, efficient!

With a frame width of 80 mm, the system offers just the right combination of compactness and stability. The frames are made of high-quality aluminium and are designed for years of use. In addition to the lightweight material, the specially designed quick connectors ensure efficient assembly and disassembly.

The frame system for every application.

Be it for trade shows, exhibitions or retail, OCTAwall pro can be perfectly customized to suit every need. The grooves running across the frames allow the system to be almost completely covered with fabric graphics and panels. Additional content can also be integrated on monitors or on LED walls. The corresponding cabling is installed in the spaces between the frames.



modular
design



space-saving
storage



durable and
sustainable



for fabric and
panel



for monitors +
LED video walls



quick assembly
+ disassembly



Modular: always different.

The individual frames and uprights can be connected with each other as desired. In this way, completely different constructions can be created from one and the same set. Always adapted to the location and the intended use. For additional flexibility, other OCTANORM components can be added to the set.

Advantages:

- Modular design: elements can be combined as desired to create different designs
- customizable with fabrics and/or panels
- compatible with other OCTANORM systems
- cost-efficient and reusable
- convenient transport packaging





OCTAWALL PRO

STARTER KIT: WP-SET 1

OCTAWALL PRO KIT 1


- 10 frames
- 2 corner uprights
- transport packaging

EXAMPLES

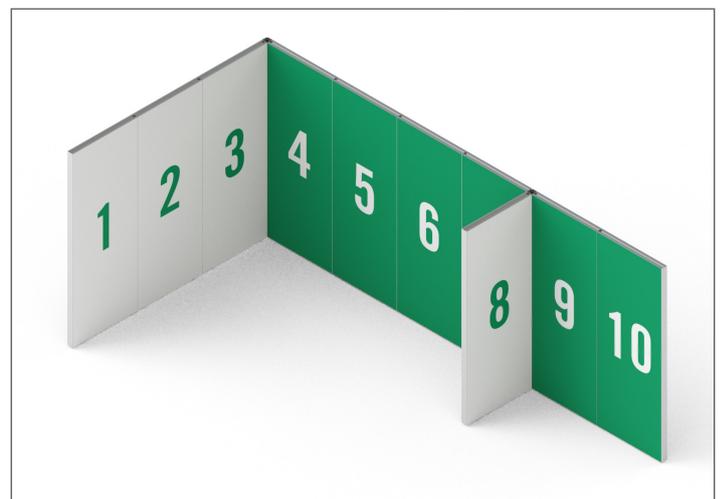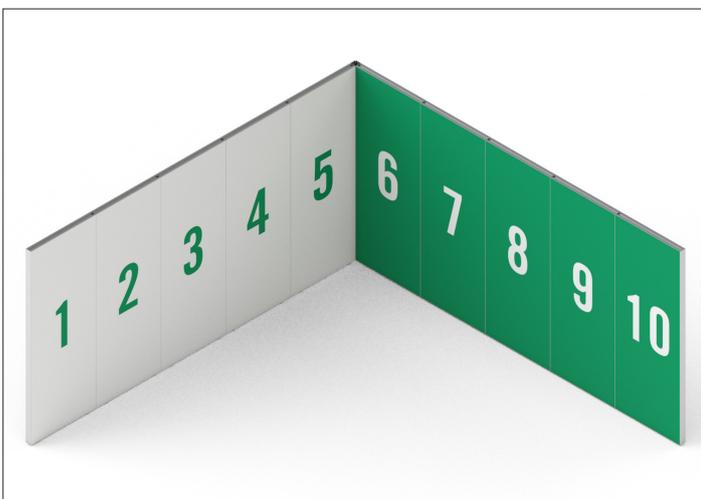



OCTAWALL PRO

Starter Kit: WP-SET 1

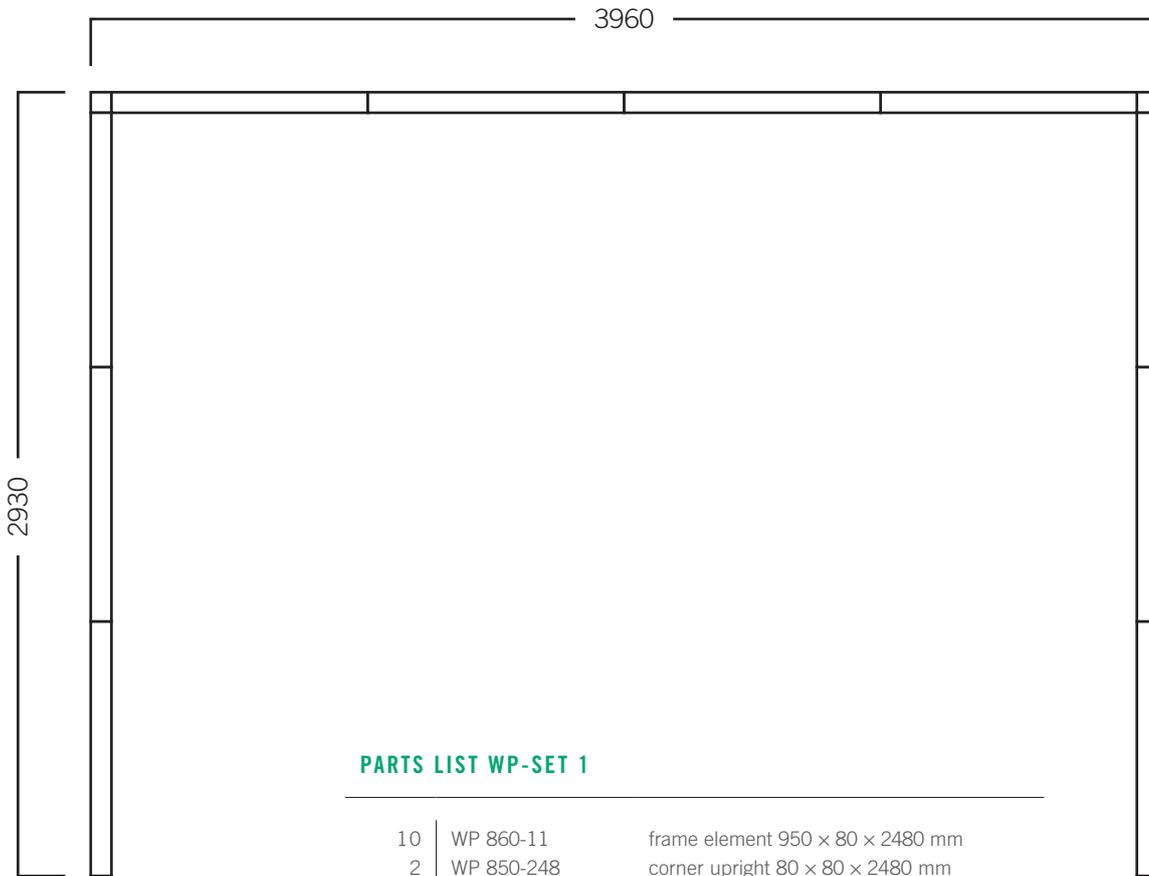

PARTS LIST WP-SET 1

10	WP 860-11	frame element 950 × 80 × 2480 mm
2	WP 850-248	corner upright 80 × 80 × 2480 mm
4	WP 830-248	cover extrusion 80 × 9 × 2480 mm
45	WP 80-1	quick connector kit for frames
25	WP 80-2	quick connector kit for uprights
20	WP 80-3	adjustable foot
1	W 2020-P	pallet 2550 × 1010 × 125 mm
1	W 2020-D	cover 2550 × 1010 × 15 mm
5	W 2020-H	stacking frame 2550 × 1010 × 200 mm

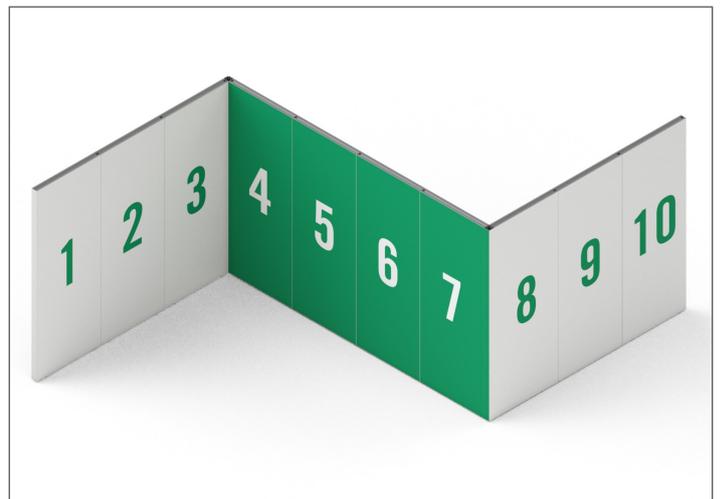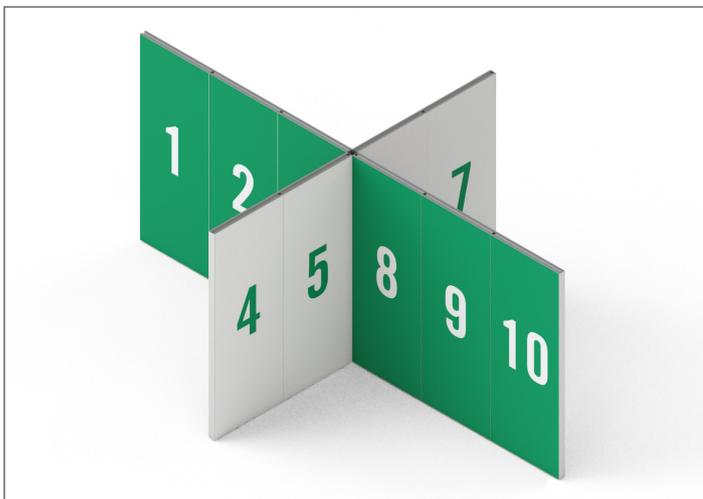

OCTAWALL PRO



STARTER KIT: WP-SET 2

OCTAWALL PRO KIT 2

- 11 frames
- 4 corner uprights
- 1 door
- transport packaging





EXAMPLES

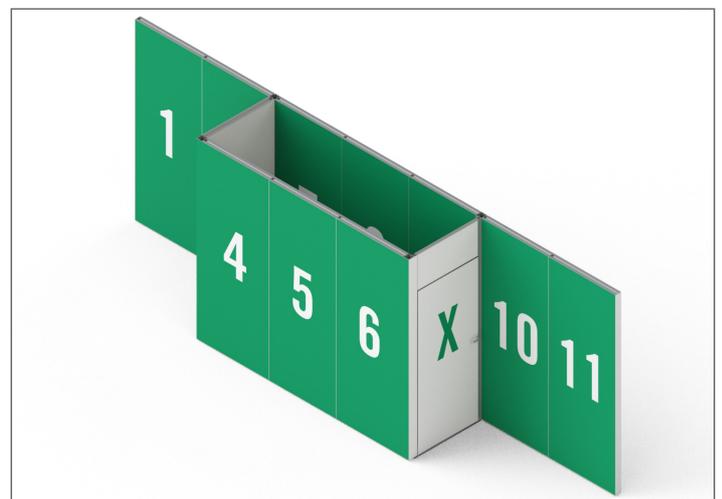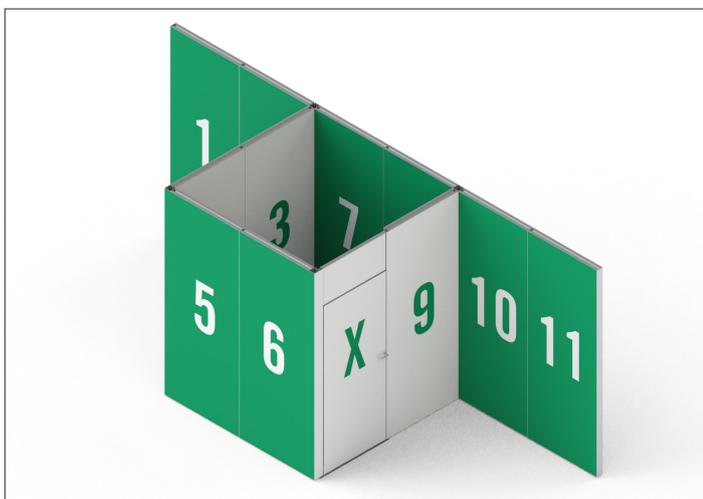

OCTAWALL PRO

Starter Kit: WP-SET 2

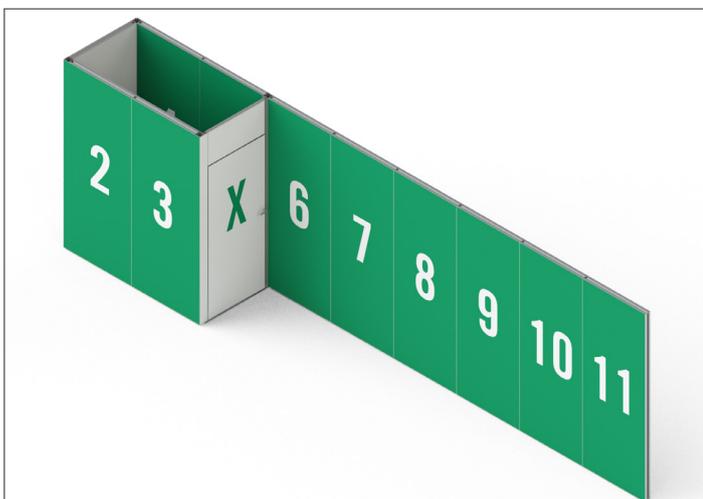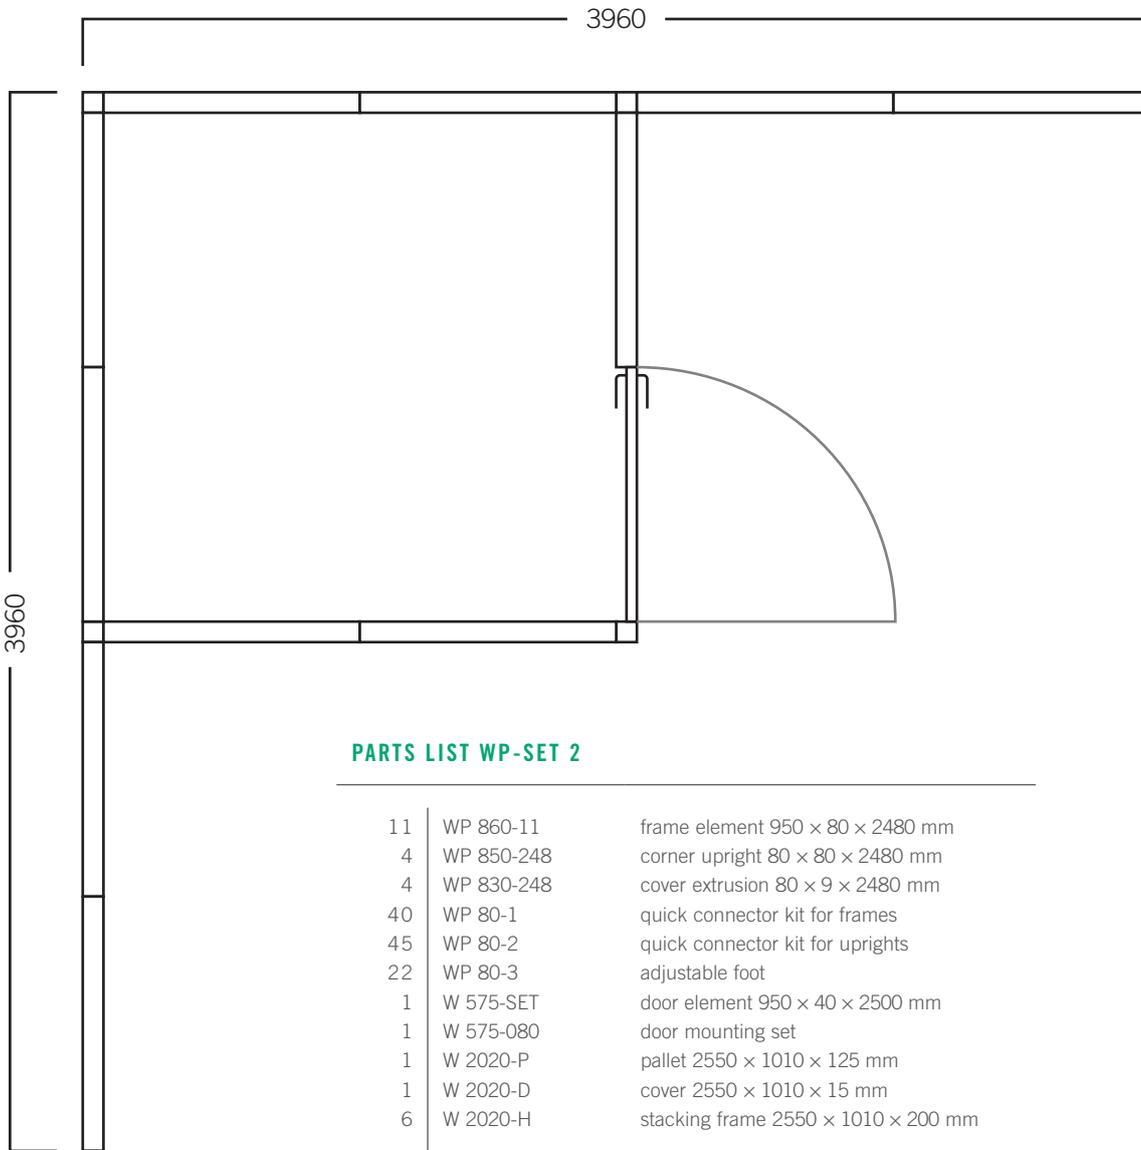

OCTAWALL PRO

Elegant aluminium surface | with system groove | integration of LED panels | for fabric/panel on both sides | internal cabling | silicone edge technology

FRAME 950 × 2480 MM




Frame available in other heights and widths

WP 860-11.01

Aluminium | 1 × frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with 30 × drill hole for quick connector WP 80-1 or WP 80-2, 8 × threaded hole for adjustable foot WP 80-3 and 8 × outlet for passing cables incl. protection WP 85-8

18.4 kg | W 950 × H 2480 × D 80 mm

Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.



CURVED FRAME 90° CURVED, 515 × 2480 MM



When combining several curved frames, deviations may occur at the joints.




Frame available in other heights

WP 860-C5.01

Aluminium | 1 × curved frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with 22 × drill hole for quick connector WP 80-1 or WP 80-2, 8 × threaded hole for adjustable foot WP 80-3 and 4 × lateral outlet for passing cables incl. protection WP 85-8, optional: central cable outlet

16.2 kg | W 515 × H 2480 × D 515 mm

Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.



CORNER UPRIGHT 90° 2480 MM




Upright available in other heights

WP 850-248.01

Aluminium | 1 × corner upright of WP 850 for connecting OCTAwall pro fabric frames with a height of 2480 mm, fabric can be tensioned over the extrusion up to the corner, incl. 2 × end plate WP 85-4

6.8 kg | L 80 × W 80 × H 2480 mm



CORNER UPRIGHT 135° 2480 MM




Upright available in other heights

WP 840-248.01

Aluminium | 1 × corner upright of WP 840 for connecting OCTAwall pro fabric frames with a height of 2480 mm at 135° angle, fabric can be tensioned over the extrusion up to the corner, incl. 2 × end plate WP 80-9

4.7 kg | L 40 × W 80 × H 2480 mm



COVER EXTRUSION

2480 MM




WP 830-248.01

Aluminium | to cover frame extrusion WP 860 of frames with 2480 mm height

1.5 kg | L 2480 x W 80 x H 9 mm

Hammerhead screw WP 80-2 is required for mounting



Cover extrusion available in other heights

DOOR ELEMENT

UNIVERSAL

950 x 2500 MM



W 575-SET.01

Aluminium | 1 x door element made of W 906, for fabric/panel on both sides, DIN left/right, inward/outward opening, incl. doorleafframe, dooruprightframe, threshold plate and door frame (top), hook tape W 840, extrusion connector E 438 and dead lock cylinder W 514, outer frame dimensions:

door leaf frame: 855 x 2021 mm

door frame (top): 870 x 450 mm

18.2 kg | W 950 x H 2500 mm x D 40 mm



Door mounting set W 575-080 is required!

Use only 12 x 3 mm silicone edges!

WALLWASHER


FOR SYSTEM GROOVE



M 1497

Aluminium | for uniform illumination of 1000 mm width and 2500 mm height (5700 Kelvin > Cri 90, 3600 lm, 28 W, 125 lm/W), for 230 V power source, for system groove 4.3 mm, space-saving and securely packed, with 16 high-power LEDs, PSU incl. cable (to the light 500 mm and from the power supply 2500 mm)

2.0 kg | L 812 x W 166 x H 263 mm



Available in silver grey .31 or black .33

MONITOR HOLDER


32" - 63", 870 MM



E 196.90

Aluminium/Steel | for attachment between two uprights with system groove 4.3 mm or frames W 950 mm, for one sided monitor solutions of LCD screens 32" - 63" VESA 50/50 to 600/400, incl. 1 x beam extrusion M 1340, 870 mm long, with 2 x tension lock Z 961/13, 2 x tension lock retractable Z 951/13, 2 x mounting bracket with universal slots and mounting hardware

3.4 kg | L 870 x W 53 x H 510 mm



Monitor can be mounted straight or at an angle of 10° max.



EXHIBITION SYSTEMS
PROJECT SOLUTIONS
PRESENTATION
INTERIOR DESIGN
CLEANROOM SYSTEMS

OCTANORM® Germany

Head Office

Raiffeisenstraße 39
70794 Filderstadt
T. +49 711 77003-0
F. +49 711 77003-53
info@octanorm.de
www.octanorm.com

EUROPE

OCTANORM® Nordic

T. +46 8 621 6500
www.octanorm.se

OCTANORM® Polska

T. +48 22 773 0350
www.octanorm.pl

OCTANORM® Belgium

T. +32 475 35 60 76
www.octanorm.be

OCTANORM® France

T. +33 6 79 11 32 05
www.octanorm.fr

OCTANORM® UK

T. +44 20 85 45 2945
www.octanorm.co.uk

OCTANORM® Espana

T. +34 930 019 424
www.octanorm.es

OCTANORM® Hellas

T. +30 2310 79 6521
www.octanorm.gr

OCTANORM® Italia

T. +39 031 2269715
www.octsystem.it

OCTANORM® Adria

T. +386 590 56301
www.octanormadria.com

AFRICA

OCTANORM® South Africa

T. +27 11 433 2010
www.octanorm.co.za

AMERICA

OCTANORM® North America

T. +1 770 7 32 1520
www.octanormna.com

OCTANORM® México

T. +52 55 5804 6325
www.octanorm.com.mx

AUSTRALIA

OCTANORM® Australia

T. +61 3 7017 2753
www.octanorm.com.au

ASIA

OCTANORM® China

T. +86 512 6283 3336
www.octanorm.cn

OCTANORM® Japan

T. +81 45 511 8144
www.octanorm.co.jp

MIDDLE EAST

OCTANORM® Emirates

T. +971 4 340 6888
www.octanormemirates.net