


octaclassic

Upright + beams

» Technics 11/25

Extrusion system: simple and fast

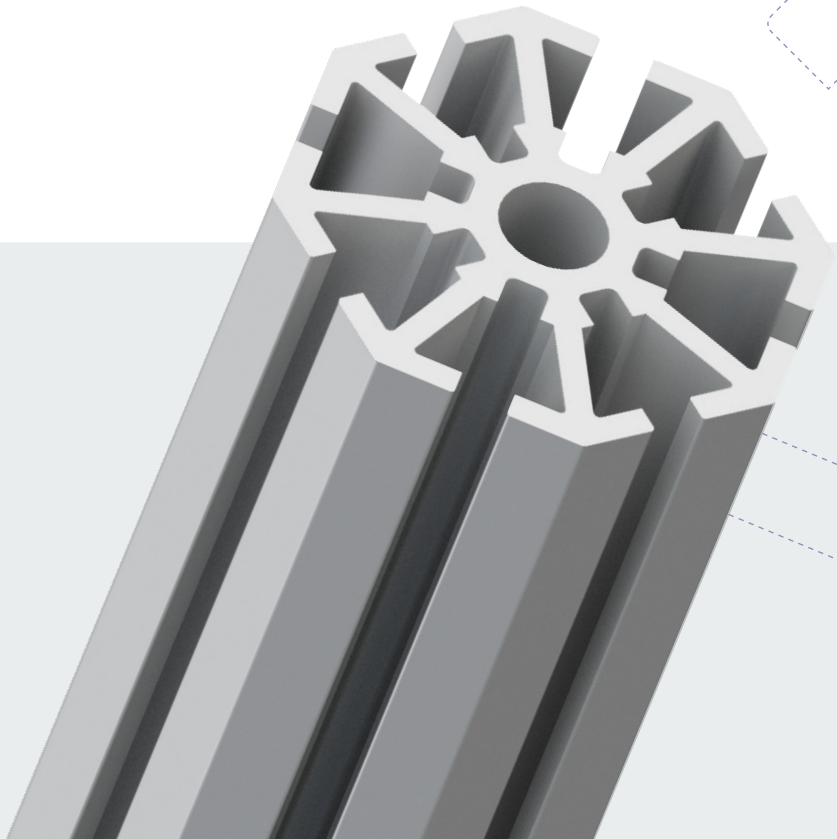

➤ Contents

➤ octaclassic


➤ Basic parts	3
➤ Accessories	23
➤ Doors	38
➤ Fabric/Panel/Glass	44
➤ Hinges	47
➤ Electrical parts	51
➤ Products	57
➤ technical information	58

Basic parts

octaclassic

Upright extrusion



groove depth 10 mm
L 5000 × W 40 × H 40 mm



S 100.01 | .11


aluminium

groove depth 10 mm
L 5000 × W 40 × H 40 mm | 6.704 kg



Upright


incl. adjustable foot S 140
L 40 × W 40 × H 2502 mm



S 110.01 | .11


aluminium

1 × upright made of S 100, incl. 1 × adjustable foot S 140, 40 × 40 mm
L 40 × W 40 × H 2502 mm | 3.37 kg



Upright extrusion



groove depth 7 mm
L 5000 × W 40 × H 40 mm



S 108.01 | .11

aluminium

tension lock Z 961/8 can be mounted in 4 positions, groove depth 7 mm
L 5000 × W 40 × H 40 mm | 5.244 kg




Basic parts

octaclassic

Upright

with adjustable foot S 140
L 40 × W 40 × H 2502 mm





S 118.11

aluminium


1 × upright made of S 108, with 1 × adjustable foot S 140, groove depth 7 mm

L 40 × W 40 × H 2502 mm | 2.78 kg



Upright extrusion

180°
L 5000 × W 40 × H 40 mm





S 201.01 | .11

aluminium

180°, tension lock Z 961/8 can be mounted, groove depth 7 mm

L 5000 × W 40 × H 40 mm | 4.248 kg



Upright extrusion

135°
L 5000 × W 40 × H 28 mm





S 203.01 | .11

aluminium

135°, groove depth 7 mm

L 5000 × W 40 × H 28 mm | 4.866 kg



Basic parts

octaclassic

Upright extrusion

90°

L 5000 × W 28 × H 28 mm





S 308.01 | .11

aluminium

90°, groove depth 7 mm


L 5000 × W 28 × H 28 mm | 4.14 kg



Upright extrusion

groove depth 7 mm

L 5000 × W 80 × H 40 mm





S 408.11

aluminium

tension lock Z 961/8 can be mounted in 2 positions, groove depth 7 mm


L 5000 × W 80 × H 40 mm | 12.64 kg



Upright extrusion

groove depth 10 mm

L 5000 × W 40 × H 40 mm





S 500.01 | .11

aluminium

groove depth 10 mm

L 5000 × W 40 × H 40 mm | 6.98 kg




Basic parts

octaclassic

Interior corner extr.


45°
L 5000 × W 17.5 × H 20 mm



S 206.01


aluminium

for triangular showcases using 45° angles
L 5000 × W 17.5 × H 20 mm | 1.41 kg



Upright extrusion



45°
L 5000 × W 35 × H 28 mm



S 302.01 | .11

aluminium

45°, groove depth 7 mm
L 5000 × W 35 × H 28 mm | 4.03 kg



Beam extrusion



for Z 961/13
L 5000 × W 25 × H 16 mm



Z 300.01 | .11

aluminium

tension lock Z 961/13 can be mounted
L 5000 × W 25 × H 16 mm | 2.042 kg



Basic parts

octaclassic

Beam extrusion

for bracing
groove depth 7 mm





Z 308.01 | .11

aluminium

for bracing, tension lock Z 961/13 can be mounted, groove depth 7 mm

L 5000 × W 32 × H 16 mm | 2.68 kg



Beam extrusion

groove depth 10 mm
L 5000 × W 37 × H 16 mm





Z 310.01 | .11

aluminium


tension lock Z 961/13 can be mounted, groove depth 10 mm

L 5000 × W 37 × H 16 mm | 2.962 kg



Beam

660 mm long
with 2 × Z 961/13





Z 320.11

aluminium

1 × beam made of extrusion Z 310, incl. 2 × built-in tension lock Z 961/13

L 660 × W 37 × H 16 mm | 0.602 kg




Basic parts

octaclassic

Beam

950 mm long
with 2 × Z 961/13




Z 325.01

aluminium


1 × beam made of extrusion Z 310, incl. 2 × built-in tension lock Z 961/13

L 950 × W 37 × H 16 mm | 0.791 kg



Beam extrusion

2 system grooves
L 5000 × W 40 × H 16 mm




Z 4300.01

aluminium

2 system grooves, tension lock Z 961/13 can be mounted

L 5000 × W 40 × H 16 mm | 3.54 kg



Beam extrusion

without system groove
L 5000 × W 43 × H 16 mm




Z 100.01 | .11

aluminium

without system groove

L 5000 × W 43 × H 16 mm | 3.14 kg




! for mounting tension lock Z 961/13 you need the adaptor Z 161/A

Basic parts

octaclassic

Beam extrusion



for 2 × Z 961/13
L 5000 × W 50 × H 16 mm



Z 402.01


aluminium

2 × tension lock Z 961/13 can be mounted one on top of the other
L 5000 × W 50 × H 16 mm | 3.76 kg



Beam extrusion



groove depth 10 mm
L 5000 × W 50 × H 16 mm



Z 400.01 | .11


aluminium

tension lock Z 961/13 can be mounted, groove depth 10 mm
L 5000 × W 50 × H 16 mm | 4.39 kg



Beam



with 2 × Z 961/13
L 455 × W 50 × H 16 mm



Z 415.01 | .11

aluminium

1 × beam made of extrusion Z 400, incl. 2 × built-in tension lock Z 961/13
L 455 × W 50 × H 16 mm | 0.496 kg




Curved beams on request

Basic parts

octaclassic

Beam

with 2 × Z 961/13
L 660 × W 50 × H 16 mm





Z 420.01 | .11

aluminium

1 × beam made of extrusion Z 400, incl. 2 × built-in tension lock
Z 961/13


L 660 × W 50 × H 16 mm | 0.749 kg



Curved beams on request

Beam

with 2 × Z 961/13
L 950 × W 50 × H 16 mm





Z 425.11

aluminium

1 × beam made of extrusion Z 400, incl. 2 × built-in tension lock
Z 961/13


L 950 × W 50 × H 16 mm | 0.891 kg



Curved beams on request

Beam

with 2 × Z 961/13
L 1360 × W 50 × H 16 mm




Z 430.01 | .11

aluminium

1 × beam made of extrusion Z 400, incl. 2 × built-in tension-lock
Z 961/13

L 1360 × W 50 × H 16 mm | 1.583 kg



Curved beams on request

Basic parts

octaclassic

Beam extrusion

groove depth 7 mm
L 5000 × W 50 × H 16 mm





Z 460.01 | .11

aluminium

for installation of cube illumination, installation of Z 951/13 tension lock, groove depth 7 mm

L 5000 × W 50 × H 16 mm | 3.955 kg



Beam

with 2 × Z 961/13
L 455 × W 50 × H 16 mm




Z 416.01 | .11

aluminium

1 × beam made of extrusion Z 460, incl. 2 × built-in tension lock Z 961/13

L 455 × W 50 × H 16 mm | 0.541 kg



Curved beams on request

Beam

660 mm long
with 2 × Z 961/13




Z 421.01 | .11

aluminium

1 × beam made of extrusion Z 460, incl. 2 × built-in tension lock Z 961/13

L 660 × W 50 × H 16 mm | 0.728 kg



Curved beams on request

Basic parts

octaclassic

Beam

with 2 × Z 961/13
L 950 × W 50 × H 16 mm




Z 426.11

aluminium

1 × beam made of extrusion Z 460, incl. 2 × built-in tension lock
Z 961/13

L 950 × W 50 × H 16 mm | 0.965 kg



1 Curved beams on request

Beam

1360 mm long
with 2 × Z 961/13




Z 431.01

aluminium

1 × beam made of extrusion Z 460, incl. 2 × built-in tension lock
Z 961/13

L 1360 × W 50 × H 16 mm | 1.533 kg



1 Curved beams on request

Beam extrusion

groove depth 10 mm
L 5000 × W 70 × H 16 mm





Z 110.01 | .11

aluminium

groove depth 10 mm

L 5000 × W 70 × H 16 mm | 5.42 kg



1 Attention: for mounting tension lock Z 961/13 the adaptor Z 161/A is needed

Basic parts

octaclassic

Beam



with 2 × Z 961/13
L 455 × W 70 × H 16 mm



Z 115.11

aluminium

1 × beam made of extrusion Z 110, incl. 2 × built-in tension lock
Z 961/13 and 2 × adaptor Z 161/A
L 455 × W 70 × H 16 mm | 0.683 kg



Curved beams on request

Beam



660 mm long
with 2 × Z 961/13



Z 120.11

aluminium

1 × beam made of extrusion Z 110, incl. 2 × built-in tension lock
Z 961/13 and 2 × adaptor Z 161/A
L 660 × W 70 × H 16 mm | 0.922 kg



Curved beams on request

Beam



with 2 × Z 961/13
L 950 × W 70 × H 16 mm



Z 125.01 | .11

aluminium

1 × beam made of extrusion Z 110, incl. 2 × built-in tension lock
Z 961/13 and 2 × adaptor Z 161/A
L 950 × W 70 × H 16 mm | 1.225 kg



Curved beams on request

Basic parts

octaclassic

Beam

1360 mm long
with 2 × Z 961/13





Z 130.11

aluminium

1 × beam made of extrusion Z 110, incl. 2 × built-in tension lock
Z 961/13 and 2 × adaptor Z 161/A, 16 × 70 mm


L 1360 × W 70 × H 16 mm | 1.878 kg



Curved beams on request

Beam extrusion

groove depth 7 mm
L 5000 × W 70 × H 16 mm





Z 160.01 | .11

aluminium


tension lock Z 961/13 can be mounted, groove depth 7 mm

L 5000 × W 70 × H 16 mm | 5.426 kg



Beam

455 mm long
with 2 × Z 961/13





Z 116.01

aluminium

1 × beam made of extrusion Z 160, incl. 2 × built-in tension lock
Z 961/13

L 455 × W 70 × H 16 mm | 0.66 kg




Curved beams on request

Basic parts

octaclassic

Beam

with 2 × Z 961/13
L 660 × W 16 × H 70 mm





Z 121.01 | .11

aluminium

1 × beam made of extrusion Z 160, incl. 2 × built-in tension lock
Z 961/13


L 660 × W 16 × H 70 mm | 0.899 kg



Curved beams on request

Beam

with 2 × Z 961/13
L 950 × W 70 × H 16 mm





Z 126.01 | .11

aluminium

1 × beam made of extrusion Z 160, incl. 2 × built-in tension lock
Z 961/13


L 950 × W 70 × H 16 mm | 1.202 kg



Curved beams on request

Beam

with 2 × Z 961/13
L 1360 × W 70 × H 16 mm





Z 131.01 | .11

aluminium

1 × beam made of extrusion Z 160, incl. 2 × built-in tension lock
Z 961/13

L 1360 × W 70 × H 16 mm | 1.929 kg




Curved beams on request

Basic parts

octaclassic

Beam extrusion

L 5000 × W 80 × H 16 mm
5000 mm long



M 1320.01

aluminium

2 × tension lock Z 961/13 can be mounted

L 5000 × W 80 × H 16 mm | 6.45 kg



Beam extrusion

L 5000 × W 120 × H 16 mm
5000 mm long



M 1340.01

aluminium

2 × tension lock Z 961/13 can be mounted

L 5000 × W 120 × H 16 mm | 9 kg



Beam extrusion

groove depth 7 mm
L 5000 × W 175 × H 16 mm





Z 508.01 | .11

aluminium

2 × tension lock Z 961/13 can be mounted each side, groove depth 7 mm

L 5000 × W 175 × H 16 mm | 9.95 kg



Basic parts

octaclassic

Beam

with 4 × Z 961/13
L 455 × W 175 × H 16 mm





Z 514.01 | .11

aluminium

1 × beam made of extrusion Z 508, incl. 4 × built-in tension lock Z 961/13

L 455 × W 175 × H 16 mm | 1.125 kg



1 Curved beams on request

Beam

with 4 × Z 961/13
L 660 × W 175 × H 16 mm





Z 519.01 | .11

aluminium

1 × beam made of extrusion Z 508, incl. 4 × built-in tension lock Z 961/13

L 660 × W 175 × H 16 mm | 1.643 kg



1 Curved beams on request

Beam

with 4 × Z 961/13
L 950 × W 175 × H 16 mm





Z 524.01 | .11

aluminium

1 × beam made of extrusion Z 508, incl. 4 × built-in tension lock Z 961/13

L 950 × W 175 × H 16 mm | 2.224 kg



1 Curved beams on request

Basic parts

octaclassic

Beam

1360 mm long
with 4 × Z 961/13




Z 529.01

aluminium

1 × beam made of extrusion Z 508, incl. 4 × built-in tension lock Z 961/13

L 1360 × W 175 × H 16 mm | 3.558 kg



Curved beams on request

Beam extrusion

groove depth 7 mm
L 5000 × W 175 × H 16 mm





Z 560.01 | .11

aluminium

2 × tension lock Z 961/13 can be mounted each side, groove depth 7 mm

L 5000 × W 175 × H 16 mm | 10.32 kg



Beam

with 4 × Z 961/13
L 660 × W 16 × H 175 mm





Z 521.01 | .11

aluminium

1 × beam made of extrusion Z 560, incl. 4 × built-in tension lock Z 961/13

L 660 × W 16 × H 175 mm | 1.72 kg



Curved beams on request

Basic parts

octaclassic

Beam extrusion

groove depth 10 mm
L 5000 × W 175 × H 16 mm




Z 600.01 | .11

aluminium

up to 4 tension locks Z 961/13 can be mounted each side, groove depth 10 mm

L 5000 × W 175 × H 16 mm | 13.53 kg



Beam

with 4 × Z 961/13
L 455 × W 175 × H 16 mm





Z 615.01 | .11

aluminium

1 × beam made of extrusion Z 600, incl. 4 built-in tension locks Z 961/13, 455 mm long

L 455 × W 175 × H 16 mm | 1.587 kg



Corner connector

90°
lock chamber 39 × 12 mm





Z 165.00

aluminium

90°, incl. 2 × hex-star screw E 111, for extrusions with lock chamber 39 × 12 mm

L 55 × W 38.6 × H 12 mm | 0.115 kg



Basic parts

octaclassic

Corner connector

90°
lock chamber 39 × 12 mm





Z 166.00

aluminium

90°, incl. 2 × hex-star screw E 11f, for extrusions with lock chamber 39 × 12 mm

L 110 × W 38.6 × H 8 mm | 0.15 kg



Internal connector

straight
for S 100 / S 108





S 137.37

aluminium

straight, for connecting upright extrusion S 100 with upright extrusion S 108, incl. internal connector S 905

L 84 × W 21 × H 12 mm | 0.051 kg



Internal connector

straight
for upright extrusion S 100





S 905.37

steel

straight, for mounting of 2 × upright extrusion S 100, thread M10

L 80 × W 10 mm | 0.035 kg



Basic parts

octaclassic

Internal connector

straight
lock chamber 21 × 12 mm





Z 967.00

aluminium

straight, for extrusions with lock chamber 21 × 12 mm and hole 13 mm dia., incl. 1 × set screw Z 967/20 (M6), 2 × hex-star screw E 111/m (M6), 2 × countersunk screw M 1102/20 (M6) and 2 × washer Z 185

L 181 × W 12 × H 21 mm | 0.128 kg



Internal connector

straight
lock chamber 39 × 12 mm





Z 167.00

aluminium

straight, for beam extrusions with lock chamber 39 × 12 mm, incl. 2 × hex-star screws E 111 and 2 × washer Z 185

L 181 × W 39 × H 12 mm | 0.221 kg



Internal connector

incl. end cap S 132
for ceiling





S 128.01 | .11

aluminium

incl. 1 × end cap S 132

L 175 × W 40 × H 40 mm | 0.234 kg




Basic parts

octaclassic

Adaptor

for tension lock Z 961/13
lock chamber 39 × 12 mm





Z 161/A.90

plastic

for mounting tension lock Z 961/13 in beam extrusions with lock chamber 39 × 12 mm

L 76 × W 44 × H 11 mm | 0.009 kg



Tension lock

8 mm
L 70 × W 20 × H 12 mm





Z 961/8.00

zinc die cast/steel

8 mm, for all beam extrusions with cross- or T-lock chamber 21 × 12 mm

L 70 × W 20 × H 12 mm | 0.054 kg



Tension lock

13 mm
L 70 × W 21 × H 13 mm





Z 961/13.00

zinc die cast/steel

13 mm, for all beam extrusions with lock chamber 21 × 12 mm as well as in conjunction with adaptor Z 161/A, for beam extrusions with lock chamber 39 × 12 mm

L 70 × W 21 × H 13 mm | 0.052 kg



Adjustable foot



M8
for S 100 / S 108 / M 1204



S 140.37

zinc die cast/steel

for upright extrusion S 100 / S 108 / M 1204, thread M8
L 43 × W 43 × H 94 mm | 0.114 kg



Adjustable foot



M8
for upright extrusion S 201



S 240.37

zinc die cast/steel

for upright extrusion S 201, thread M8, incl. 1 × set screw
M 1036/20 (M4)
L 43 × W 43 × H 94 mm | 0.106 kg



Adjustable foot


M8
for upright extrusion S 308



S 340.37

zinc die cast/steel

for upright extrusion S 308, thread M8, incl. 1 × set screw
M 1036/20 (M4)
L 43 × W 43 × H 94 mm | 0.098 kg



Adjustable foot

M8
for upright extrusion S 500




S 540.37

zinc die cast/steel

for upright extrusion S 500, thread M8, incl. 1 x set screw M 1036/20 (M4)

L 49 x W 43 x H 94 mm | 0.111 kg



Adjustable foot

M8
for upright extrusion S 302




S 342.37

zinc die cast/steel

for upright extrusion S 302, thread M8, incl. 1 x set screw E 212/Z (M4)

L 43 x W 43 x H 94 mm | 0.092 kg



Adjustable foot

M8
for upright extrusion S 303





S 343.37

zinc die cast/steel

for upright extrusion S 303, thread M8, incl. 1 x set screw E 212/Z (M4)

L 43 x W 43 x H 94 mm | 0.094 kg



Accessories

octaclassic

Adjustable foot

for curved beams
L 40 × W 43 × H 77 mm




E 250.90

aluminium/steel, zinc-plated


to support curved beams

L 40 × W 43 × H 77 mm | 0.116 kg



Foot plate

for upright extrusion S 100
L 335 × W 335 × H 16 mm





S 150.21

steel


for upright extrusion S 100, incl. 1 × hexagon head screw S 150/Z (M10) and 1 × washer S 4330/40

L 335 × W 335 × H 16 mm | 1.445 kg



Intermediate washer

M10
for base plate S 150




S 151.01

aluminium

for base plate S 150, to adjust the height of base plate S 150 to the height of an adjustable foot, with thread M10

L 45 × W 45 × H 4.5 mm | 0.018 kg



Accessories

octaclassic

Base plate

for upright extrusions
L 320 × W 120 × H 212 mm





M 1408.21

steel

for upright extrusions M 1000 / S 108..., incl. supporting peg
M 1408/2, 1 × countersunk screw eZ5030/20 (M10) and 1 ×
hex-star screw E 111/m (M6)

L 320 × W 120 × H 212 mm | 2.806 kg



End cap

for extrusion S 100/S 108
L 40 × W 40 × H 17 mm





S 132.30 | .35

plastic

for upright extrusion S 100 / S 108

L 40 × W 40 × H 17 mm | 0.004 kg



End cap

for upright extrusion S 201
L 40 × W 29 × H 17 mm





S 230.30 | .35

plastic

for upright extrusion S 201

L 40 × W 29 × H 17 mm | 0.003 kg




Accessories

octaclassic

End plate


for upright extrusion S 203
L 40 × W 28 × H 12 mm



S 233.39

zinc die cast

for upright extrusion S 203
L 40 × W 28 × H 12 mm | 0.02 kg



End cap


for upright extrusion S 308
L 28 × W 28 × H 12 mm



S 330.30 | .35


plastic

for upright extrusion S 308
L 28 × W 28 × H 12 mm | 0.003 kg



End plate


for interior corner extrusion S 206
L 20 × W 18 × H 1 mm



S 236.01

aluminium plate

for interior corner extrusion S 206, self-adhesive, 1 mm thick
L 20 × W 18 × H 1 mm |




Accessories

octaclassic

End plate

for S 302
L 12 × W 35 × H 28 mm




S 332.39

zinc die cast

for S 302

L 12 × W 35 × H 28 mm | 0.016 kg



End cap

for beam extrusion Z 300
L 25 × W 16 × H 14 mm





Z 970.30 | .35

plastic

for beam extrusion Z 300, 3 mm thick

L 25 × W 16 × H 14 mm | 0.002 kg



End cap

for beam extrusion Z 308
L 32 × W 16 × H 12 mm





Z 976.35

plastic, light grey

for beam extrusion Z 308, 2 mm thick

L 32 × W 16 × H 12 mm | 0.002 kg



Accessories

octaclassic

End cap

for beam extrusion Z 310
L 37 × W 16 × H 12 mm





Z 974.30 | .35

plastic

for beam extrusion Z 310

L 37 × W 16 × H 12 mm | 0.002 kg



End cap

for Z 400 / Z 402 / Z 460
L 51 × W 16 × H 12 mm





Z 975.35

plastic, light grey

for beam extrusion Z 400 / Z 402 and Z 460, 2 mm thick

L 51 × W 16 × H 12 mm | 0.003 kg



End cap

for Z 100
L 43 × W 16 × H 13 mm





Z 170.35

plastic, light grey

for Z 100

L 43 × W 16 × H 13 mm | 0.004 kg



Accessories

octaclassic

End cap


for extrusion Z 110 / Z 160
L 70 × W 16 × H 12 mm



Z 175.35


plastic, light grey

for beam extrusion Z 110 / Z 160, 2 mm thick
L 70 × W 16 × H 12 mm | 0.003 kg



Cover extrusion



for extrusions 16 mm
L 5000 × W 16 × H 3 mm



E 458.35


plastic, semi-hard

for system groove 4.3 mm, for extrusions 16 mm
L 5000 × W 16 × H 3 mm | 0.38 kg



Adaptor



for S 108/S 201/S 208/S 408
L 16 × W 40 × H 13 mm



S 135.35

plastic, light grey

for extrusion S 108 / S 201 / S 208 / S 408
L 16 × W 40 × H 13 mm | 0.002 kg



Mounting connector



for beams 70 mm
L 22 × W 40 × H 70 mm



Z 169.37

steel

for beam extrusion Z 110 / Z 160
L 22 × W 40 × H 70 mm | 0.045 kg



Mounting connector


for beams 175 mm
L 22 × W 40 × H 175 mm



Z 969.37

steel

for beams 175 mm
L 22 × W 40 × H 175 mm | 0.105 kg



Fixing angle



incl. S 6025/20 (M6)
L 34 × W 34 × H 10 mm



S 6035.37

steel

incl. 1 × set screw S 6025/20 (M6)
L 34 × W 34 × H 10 mm | 0.015 kg



Accessories

octaclassic

Panel retainer

with drill hole 4.5 mm dia.
L 24 × W 25 × H 17 mm




E 221.38

steel


with drill hole 4.5 mm dia.

L 24 × W 25 × H 17 mm | 0.013 kg



Ceiling panel retainer

double sided
support 22 mm





E 225.37

spring steel

22 mm support on both sides, can be fixed in system groove of all beam extrusions

L 60 × W 18 × H 8 mm | 0.005 kg



Ceiling panel retainer

single sided
support 22 mm




E 226.37

spring steel

22 mm support on one side only, can be fixed in system groove of all beam extrusions

L 38 × W 18 × H 8 mm | 0.004 kg



Accessories

octaclassic

Adaptor

for monitor 15" - 21"
L 120 × W 120 × H 16 mm




E 185.01

aluminium

for LCD screens 15", 17", 19", 21", incl. mounting material with 8 × borehole 5 mm dia.

L 120 × W 120 × H 16 mm | 0.558 kg

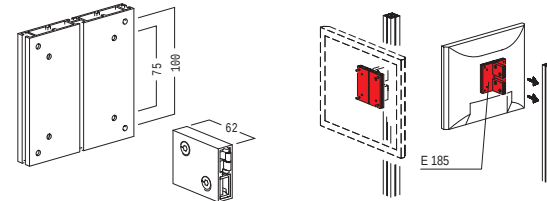

Monitor mount

angle 0°-8°
for monitor 32"-52"




E 191.90

aluminium/steel


for LCD screens 32" - 52", for attachment to standard upright extrusions with system groove 4.3 mm mountable between 2 upright extrusions for 990 mm axis, monitor can be mounted straight or at an angle of 8° max., incl. 1 × beam extrusion M 1340, 973 mm long, 4 × tension lock Z 961/13, 2 × mounting bracket with universal slots and mounting hardware

L 973 × W 67 × H 879 mm | 3.6 kg



Monitor mount

angle 0°-10°
for monitor 32"-52"




E 195.90

aluminium/steel

for LCD screens 32" - 63" VESA 50/50 to 600/400, for attachment between two uprights with system groove 4.3 mm, for one sided monitor solutions, monitor can be mounted straight or at an angle of 10° max., incl. 1 × beam extrusion M 1340, 770 mm long, 4 × tension lock Z 961/13, 2 × mounting bracket with universal slots and mounting hardware

L 770 × W 53 × H 510 mm | 3.441 kg




Accessories

octaclassic

Supporting beam

straight
L 100 × W 16 × H 25 mm





E 708.01 | .11

aluminium

straight, for mounting to system groove 4.3 mm, incl. 1 × tension lock Z 961/13 and 1 × end cap E 708/K

L 100 × W 16 × H 25 mm | 0.106 kg



Attention: maximum distributed dead load 35 kg

End cap

for shelf bracket E 708
L 38 × W 25 × H 16 mm





E 708/K.30 | .35

plastic


for shelf bracket E 708

L 38 × W 25 × H 16 mm | 0.002 kg



Supporting beam

straight
L 150 × W 16 × H 43 mm





E 710.01 | .11

aluminium

straight, for mounting to system groove 4.3 mm, incl. 1 × tension lock Z 961/13, 2 × anti-slipping device M 1670/K and 1 × adaptor Z 161/A

L 150 × W 16 × H 43 mm | 0.143 kg




Attention: maximum distributed dead load 35 kg

Accessories

octaclassic

End cap

for shelf bracket E 710
L 100 × W 16 × H 9 mm





E 710/K.35

plastic, light grey


for shelf bracket E 710

L 100 × W 16 × H 9 mm | 0.005 kg



Supporting beam

straight
L 200 × W 16 × H 43 mm





E 711.01 | .11

aluminium

straight, for mounting to system groove 4.3 mm, incl. 1 × tension lock Z 961/13, 2 × anti-slipping device M 1670/K and 1 × adaptor Z 161/A


L 200 × W 16 × H 43 mm | 0.142 kg



Attention: maximum distributed dead load 35 kg

Supporting beam

straight
L 250 × W 16 × H 43 mm





E 712.01 | .11

aluminium

straight, for mounting to system groove 4.3 mm, incl. 1 × tension lock Z 961/13, 2 × anti-slipping device M 1670/K and 1 × adaptor Z 161/A

L 250 × W 16 × H 43 mm | 0.155 kg



Attention: maximum distributed dead load 30 kg

Accessories

octaclassic

Shelf connector



for shelf brackets E 708-E 712
L 60 × W 20 × H 23 mm



E 720/G.01


aluminium

for shelf brackets E 708 – E 712, incl. 1 × plastic set screw E 720/M8
L 60 × W 20 × H 23 mm | 0.017 kg



Shelf board



variable
for shelf bracket E 737



E 739.21

aluminium, powder coated

for variable use, for brackets E 737
L 316 × W 974 × H 30 mm | 5.878 kg



Attention: only for axis measurement 990 mm

Coat hook



to slide on
L 62 × W 16 × H 50 mm



E 284.01

aluminium

to slide on beam extrusions B 37 × H 16 mm
L 62 × W 16 × H 50 mm | 0.021 kg




Accessories

octaclassic

Coat hanger beam

for 990 mm axis
L 975 × W 16 × H 37 mm





E 280.01 | .11

aluminium

incl. 1 × built-in tension lock Z 951/13 and 1 × Z 961/13, mountable
between 2 upright extrusions, for 990 mm axis

L 975 × W 16 × H 37 mm | 0.804 kg



Drapery glider

for system groove 4.3 mm
L 9 × W 9 × H 21 mm





E 240.30

plastic, white

for system groove 4.3 mm

L 9 × W 9 × H 21 mm |



↗ Doors

octaclassic

Door

Set
DIN left/right





W 425-SET.01

aluminium/steel

1 × door element of M 1305/W 906, for double-sided fabric/panel, universal for DIN left/right, consisting of door leaf frame, door upright frame incl. threshold plate and door roof frame, with hook tape W 840, with dead lock cylinder W 514, outer frame dimension door leaf frame: 855 × 2021 mm, outer frame dimension door frame (top): 870 × 450 mm

W 950 × H 2500 × D 40 mm | 18.722 kg



Attention: Only use silicone edge 12 × 3 mm for doorleaf frame!

fabric dimension = outer frame dimension

Door set

for 40/80/120 mm
W 950 × H 2500 × D 40 mm





W 575-SET.01

aluminium/steel

1 × door element made of W 906, for fabric/panel on both sides, DIN left/right, inward/outward opening, incl. doorleaf frame, door upright frame, threshold plate and door frame (top), hook tape W 840, extrusion connector E 438 and dead lock cylinder W 514, outer frame dimensions: door leaf frame: 855 × 2021 mm, door frame (top): 870 × 450 mm

W 950 × H 2500 × D 40 mm | 18.222 kg



Only use silicone edge 12 × 3 mm for doorleaf frame

fabric dimension = outer frame dimension

Door Mounting Set

for door W 575
integration into 40 mm






W 575-040.01



aluminium

for the 20 mm protruding connection of the door element W 575 to Maxima 40, consisting of: 6 × fixing angle W 575-040A, 6 × swivel-in slot nut C 60-590, 12 × countersunk screw M4 VA 1058/20

L 20 × W 32 × H 60 mm | 0.127 kg



octaclassic

[illegible]

Doors

octaclassic

Door

Set
W 950 × H 1930 × D 16 mm




W 541-SET.01 | .11

aluminium

Kit DIN left, incl. 1 × mortise lock and 1 × door handle set, with dead lock cylinder W 514, without fillings, for axis measurement 990 mm, assembly dimension 950 × 1930 mm

W 950 × H 1930 × D 16 mm | 12.907 kg



Door set

Set right
W 860 × H 1985 × D 39 mm




W 580-SET.30

wood/steel

Set includes: 1 × door leaf DIN right W 580/T for door frame W 580/Z, 1 × W 517/R mortise lock PZ DIN right, 1 × door handle set W 584PZ with rosette, 1 × profile double cylinder W 514 incl. 3 keys W 415/S, 1 × threshold plate W 524 for door frame W 580/Z, axis measurement 990 mm

W 860 × H 1985 × D 39 mm | 17.688 kg



Door set

Set left
W 860 × H 1985 × D 39 mm




W 581-SET.30

wood/steel

Set includes: 1 × door leaf DIN left W 581/T for door frame W 580/Z, 1 × W 517/L mortise lock PZ DIN left, 1 × door handle set W 584PZ with rosette, 1 × profile double cylinder W 514 incl. 3 keys W 415/S, 1 × threshold plate W 524 for door frame W 580/Z, axis measurement 990 mm

W 860 × H 1985 × D 39 mm | 17.688 kg



Doors

octaclassic

Door frame

for door panel W 580 / W 581
W 950 × H 2030 × D 16 mm





W 580/Z.01

aluminium

for door panel W 580 / W 581, right side, can be changed to door stop left side, incl. 1 × threshold seal W 585, assembly dimension 950 × 2030 mm

W 950 × H 2030 × D 16 mm | 4.669 kg



Threshold plate

for axis measurement 990 mm
for W 510/Z / W 580/Z





W 524.37

steel

for door frames W 510/Z and W 580/Z, for axis measurement 990 mm

L 1140 × W 50 × H 5 mm | 1.77 kg



Threshold seal

roll 5 m
L 5000 × W 8 mm




W 585.30

plastic, white


on roll, 5 m

L 5000 × W 8 mm | 0.1 kg



Door handle set

**skeleton key mortise lock
for W 580/T / W 581/T**




W 582.30

plastic


for skeleton key mortise lock, for door plate W 580/T and W 581/T, with rosette and fixing screws

L 176 × W 151 × H 19 mm | 0.308 kg



Door handle set

**profile cylinder lock
for W 580/T / W 581/T**




W 584PZ.30

plastic

for profile cylinder lock, for door plate W 580/T and W 581/T, with rosette and fixing screws

L 176 × W 151 × H 19 mm | 0.309 kg



Drilling

**for W 582 / W 548PZ
L 52 × W 130 × H 18 mm**




W 599.33

plastic


for door handle set W 582 and W 548PZ at door leaf W 580/T and 581/T, without drill (7 mm dia.)

L 52 × W 130 × H 18 mm | 0.056 kg



Door handle set

with plate
for W 510/T / W 511/T




W 512.30

plastic

for door panels W 510/T and W 511/T, incl. door plate and fixing screws

L 177 × W 150 × H 156 mm | 0.49 kg



Door cylinder

for W 425 / W 575 / W 805
L 61 × W 42 × H 28 mm




W 514.38

steel


1 × dead lock cylinder, for mounting into door W 425 / W 575 / W 805, incl. 3 × key W 514/S

L 61 × W 42 × H 28 mm | 0.222 kg



Beam extrusion

panel, single sided 16 mm
 L 5000 × W 50 × H 16 mm





W 101.01 | .11

aluminium

with supporting flange for 16 mm wall cladding on one side,
 tension lock Z 961/13 can be mounted

L 5000 × W 50 × H 16 mm | 5.56 kg



Extrusion connector

for system groove 4.3 mm
 L 5000 × W 10 × H 10 mm




E 438.30

plastic, semi-hard

for connection of 2 aluminium extrusions in parallel alignment,
 suitable for extrusions with a narrow mounting chamber (8.7 mm
 min.), for system groove 4.3 mm

L 5000 × W 10 × H 10 mm | 0.277 kg



Internal connector

L 5000 × B 3.9 × H 24 mm
 5000 mm long





W 105.01

aluminium


with 6 × hole (2 mm dia.) on one edge

L 5000 × B 3.9 × H 24 mm | 1.203 kg



Panel retainer

top
L 30 × W 30 × H 22 mm





W 108.00

aluminium

with clip-on mechanism for beams on top

L 30 × W 30 × H 22 mm | 0.013 kg



Panel retainer

for concealed joint
L 30 × W 24 × H 24 mm





W 109.00

aluminium

for concealed joint, to be fixed to system groove of the upright from outside (90°), in conjunction with connecting spline W 105

L 30 × W 24 × H 24 mm | 0.009 kg



Fascia hook

2 × drill hole Ø5 mm
L 20 × W 16.5 × H 50 mm





E 220.38

steel

with 2 × countersunk drill hole 5 mm dia.

L 20 × W 16.5 × H 50 mm | 0.023 kg



Fascia hook


adjustable height 9 mm
2 x drill hole Ø5 mm



E 220/S.38


steel

adjustable height 9 mm, with 2 x countersunk drill hole 5 mm dia.
L 20 x W 16.5 x H 50 mm | 0.029 kg

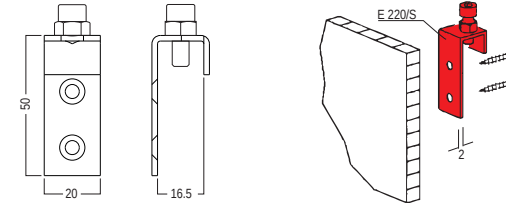

Glass panel retainer


for glass 4-8 mm
L 5000 x W 16 x H 16.5 mm



E 420.30 | .33 | .35

plastic

for 4 - 8 mm panels
L 5000 x W 16 x H 16.5 mm | 0.83 kg

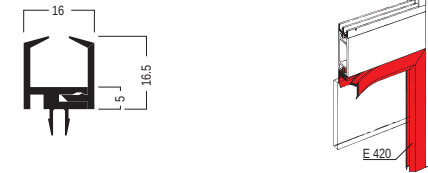


↗ Hinges

octaclassic

Hinged extrusion



for S 260 - 266
L 5000 × W 35 × H 16 mm



S 250.01 | .11


aluminium

in connection with S 260 - 266 usable as hinged extrusion
L 5000 × W 35 × H 16 mm | 3.14 kg



Hinged extrusion


for S 260 - 266
L 5000 × W 16 × H 16 mm



S 252.01

aluminium

in connection with S 260 - 266 usable as hinged extrusion
L 5000 × W 16 × H 16 mm | 1.73 kg



Adjustable foot



M8
28-68 mm



S 270.37

steel

height adjustable from 28 to 68 mm, thread M8 (50 mm long)
L 30 × W 30 × H 70 mm | 0.058 kg



Hinged connector

M8
for S 250 / S 252





S 260.37

steel

for 2 × extrusion S 250 / S 252, thread M8, incl. 1 × retaining ring S 271

L 33 × W 16 × H 43 mm | 0.053 kg



Threaded plug

M8
for S 250 / S 252




S 261.37

steel

for extrusions S 250 / S 252, thread M8, incl. 1 × retaining ring S 271

L 16 × W 16 × H 43 mm | 0.026 kg



Hinged connector

for 2 × S 250 / S 252
L 17 × W 17 × H 83 mm




S 262.37

steel

for 2 × extrusion S 250 / S 252

L 17 × W 17 × H 83 mm | 0.077 kg



↗ Hinges

octaclassic

Hinged connector

for 3 × S 250 / S 252
L 31 × W 33 × H 43 mm





S 263.37

steel

for 3 × hinged extrusion S 250 / S 252, thread M8, incl. 1 × retaining ring S 271

L 31 × W 33 × H 43 mm | 0.079 kg



Hinged connector

for 4 × S 250 / S 252
L 32 × W 16 × H 83 mm





S 264.37

steel

for 4 × hinged extrusion S 250 / S 252

L 32 × W 16 × H 83 mm | 0.126 kg



Hinged connector

for 6 × S 250 / S 252
L 31 × B 33 × H 83 mm




S 266.37

steel

for 6 × hinged extrusion S 250 / S 252

L 31 × B 33 × H 83 mm | 0.174 kg



↗ Hinges

octaclassic

End cap



for hinged extrusion S 250
L 35 × W 16 × H 10 mm



S 257.35

plastic

for hinged extrusion S 250
L 35 × W 16 × H 10 mm | 0.002 kg



Retaining ring


for S 260 / S 261 / S 263
L 12.5 × W 12.5 × H 1.5 mm



S 271.33

rubber

to ensure that S 260 / S 261 / S 263 fit tightly in hinged extrusions
S 250 / S 252, 12.5 mm dia.
L 12.5 × W 12.5 × H 1.5 mm |




Electrical parts

octaclassic

Pendant light

1 illuminated side
L 1000 × W 80 × H 80 mm





OL 3100.01 | .03

aluminium


Set consisting of: 1 × upright L 1022-1000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 x 3.500 mm OL 466, 2 × wire rope retainer set L 222

L 1000 × W 80 × H 80 mm | 4.106 kg



Pendant light

1 illuminated side
L 2000 × W 80 × H 80 mm





OL 3200.01 | .03

aluminium

Set consisting of: 1 × upright L 1022-2000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 x 3.500 mm OL 466, 2 × wire rope retainer set L 222

L 2000 × W 80 × H 80 mm | 6.933 kg



Pendant light

1 illuminated side
L 3000 × W 80 × H 80 mm





OL 3300.01 | .03

aluminium

Set consisting of: 1 × upright L 1022-3000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 x 3.500 mm OL 466, 2 × wire rope retainer set L 222

L 3000 × W 80 × H 80 mm | 9.882 kg



Electrical parts

octaclassic

Wallwasher

LED / 28W / 230V
L 812 × W 166 × H 263 mm





M 1497.31 | .33

aluminium

for uniform illumination of 1000 mm width and 2500 mm height (5700 Kelvin > Cri 90, 3600 lm, 28 W, 125 lm/W), for 230 V power source, for system groove 4.3 mm, space-saving and securely packed, with 16 high-power LEDs, PSU incl. cable (500 mm to lamp and 2500 mm from power supply)

L 812 × W 166 × H 263 mm | 2.041 kg



Hanging lamp

LED / 56W / 230V
L 818 × W 150 × H 35 mm




M 1497-H.33

aluminium, matt powder-coated


for a homogenous illumination in 5700K > Cri 90, with 32 highpower LEDs, 7200 lm, 56 W, 128 lm/W, for 230 V, incl. 3.5 m wire rope with 2 × Reutlinger wire rope holders to adjust height, 2 × plastic end caps black, 1 × power supply unit incl. DC distributor, 3 m extension cable with DC connector

L 818 × W 150 × H 35 mm | 2.49 kg



Power supply

for wallwasher M 1497
L 1175 × W 72 × H 35 mm




M 1497-11.90

plastic

for wallwasher M 1497, converter with 24V, 6.67A, 160W, rated voltage AC 100-240V, 50/60Hz, cable 1000 mm long

L 1175 × W 72 × H 35 mm | 0.638 kg




Attention: suitable power cord M 1497-12 is required

Electrical parts

octaclassic

Cable


for wallwasher M 1497
2500 mm long



M 1497-12.90

plastic, black

for wallwasher M 1497, power cord CEE 7/7 - C13
2500 mm long | 0.259 kg



Extension cable


for wallwasher M 1497
3000 mm long



M 1497-1.33

plastic, black

cable for connecting M 1497 wallwashers, with angled barrel connector at both ends
3000 mm long | 0.128 kg



PWM Dimmer


for wallwasher M 1497
L 150 × W 40 × H 20 mm



M 1497-4.90

plastic

1 × control unit and remote control for dimming of max. 5 wallwasher M 1497, DC 12-24 V, 2.4 GHz, PWM frequency 1.95 KHz
L 150 × W 40 × H 20 mm | 0.103 kg



Electrical parts

octaclassic

Cable

Y-Splitter for wallwasher M 1497





M 1497-3.90

plastic, black

Y-cable for connecting up to 5 × wallwasher M 1497, with barrel connector at all ends

300 mm long | 0.041 kg



Long-arm floodlight

25 W L 490 × W 232 × H 40 mm





M 1494.31 | .33

aluminium

for swivel mounting in system groove, incl. adapter plate and connection cable 3 m, 25 W, 2500 lm, 4000 K, voltage input: 100-240 VAC, voltage output: 27-35 VDC, color rendering index: 80+ CRI, beam angle: 120°


L 490 × W 232 × H 40 mm | 0.76 kg



**without connecting
cable M 1494-xxxx**

Connecting cable

for M 1494 1000 mm long





M 1494-1000.33

rubber

230V connecting cable for IEC C13 connections, one side plug, one side socket, can also be used as an extension

1000 mm long | 0.115 kg




Electrical parts

octaclassic

Connecting cable

for M 1494
2000 mm long





M 1494-2000.33

rubber


230V connecting cable for IEC C13 connections, one side plug, one side socket, can also be used as an extension

2000 mm long | 0.23 kg



Connecting cable

for M 1494
3000 mm long





M 1494-3000.33

rubber

230V connecting cable for IEC C13 connections, one side plug, one side socket, can also be used as an extension

3000 mm long | 0.35 kg



Long-arm floodlight

LED / 12W / 230V
L 535 x W 119 x H 250 mm





M 1498.31

aluminium

for voltage 100 – 230 V, for mounting in system groove 4.3 mm, 12 W / 230 V, 4000 K, 960 lm, incl. 1 x M 1481 retainer, 1 x cable 3000 mm, with integrated transformer and screwed on safety glass

L 535 x W 119 x H 250 mm | 0.614 kg




Electrical parts

octaclassic

Retainer

for long-arm floodlight M 1498
L 26 × W 35 × H 16 mm





M 1481.01

aluminium

for installation in 4.3 mm system groove (extrusion top face) can be used in combination with long-arm spot light M 1480 / M 1499

L 26 × W 35 × H 16 mm | 0.014 kg



Cable retaining

small
for system groove 4.3 mm





E 460.35

plastic, semi-hard

small, for mounting of cables to system groove

L 5000 × W 16 × H 20 mm | 0.73 kg



Products

octaclassic

Counter

not illuminated
W 902 × H 965 × D 379 mm




Q 400.31

aluminium

basic set: silver-grey RAL 9006

W 902 × H 965 × D 379 mm | 25.78 kg



Counter

not illuminated
W 910 × H 912 × D 446 mm




Q 800.31

aluminium

base-set, silvergrey RAL 9006, displacement (45°) of the groove for flat welt, Measurements for prints: front: W 905 × H 905 mm, side: W 445 × H 905 mm

W 910 × H 912 × D 446 mm | 17.5 kg





**without
fabric/graphics**

**The silicone edge has
to be cut at a 45°
angle.**


➤ M-WW-2.0	
Assembly Instruction / User Manual M 1497-H Wallwasher hanging lamp	
➤ TI-KD-7.0	60
Monitor Terminal	
➤ TI-M-64.1	61
Wall extrusion 40/40 and cladded slab 16 mm - door solutions	
➤ TI-MB-S1.0	62
Load capacity of upright extrusions	
➤ TI-MB-S2.0	63
Adjustable foot S 140 - Mounting height 22 mm	
➤ TI-MB-W3.0	64
Dimensions of wall fillings	
➤ TI-MB-W3.1	65
Dimensions of wall fillings	
➤ TI-MB-W3.5	66
Dimensions of wall fillings	
➤ TI-MB-W3.6	67
Dimensions of wall fillings	
➤ TI-MB-W3.7	68
Dimensions of wall fillings	
➤ TI-MB-W3.8	69
Dimensions of wall fillings	


➤ technical information

➤ TI-MB-W3.9	70
Dimensions of wall fillings	
➤ TI-MB-W4.0	71
Dimensions of shelf boards	
➤ TI-MB-W4.1	72
Dimensions of shelf boards	
➤ TI-NL-34	73
Instructions for use of beam extrusions: Punching for tension lock mounting	

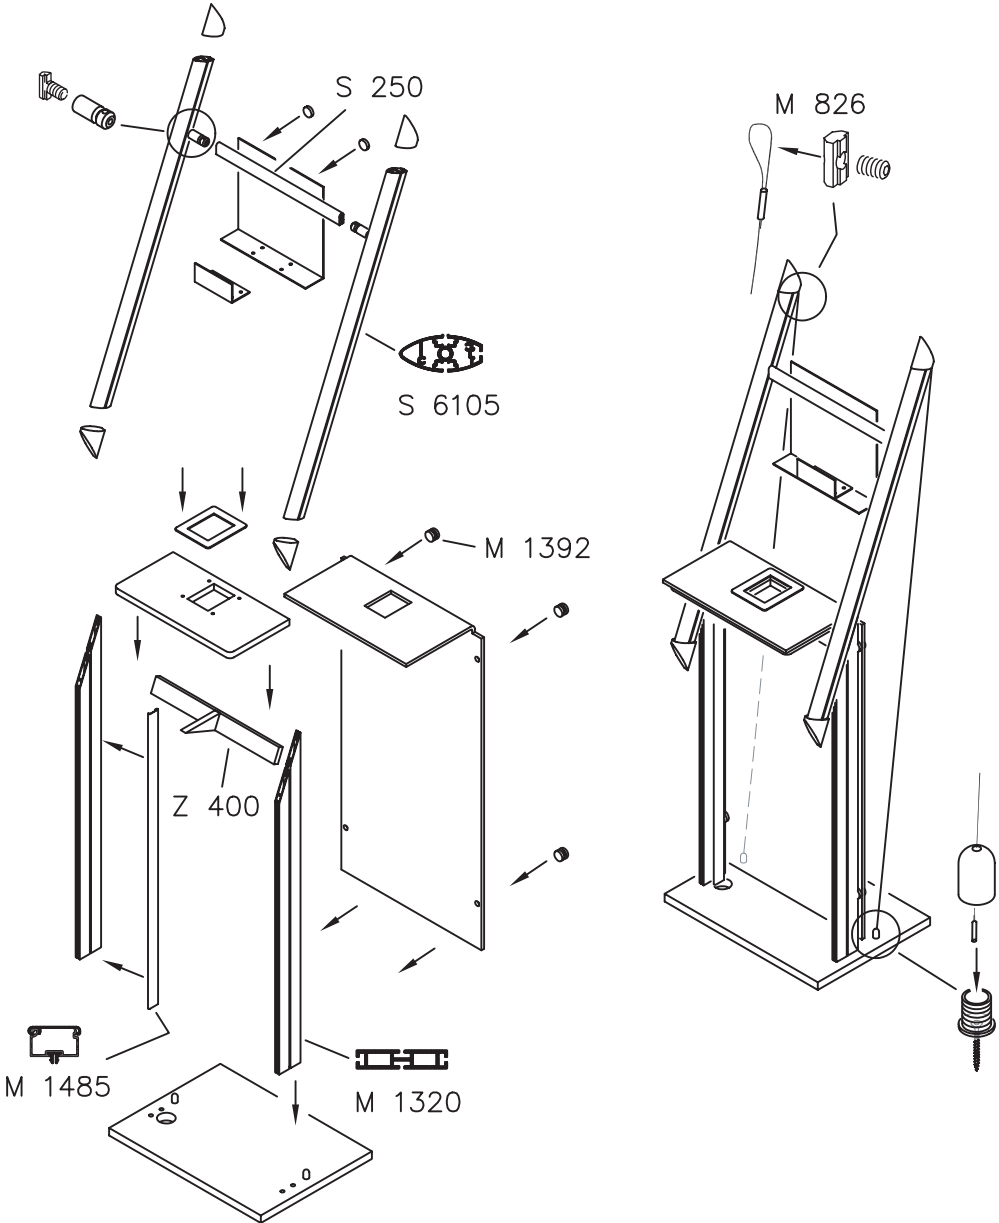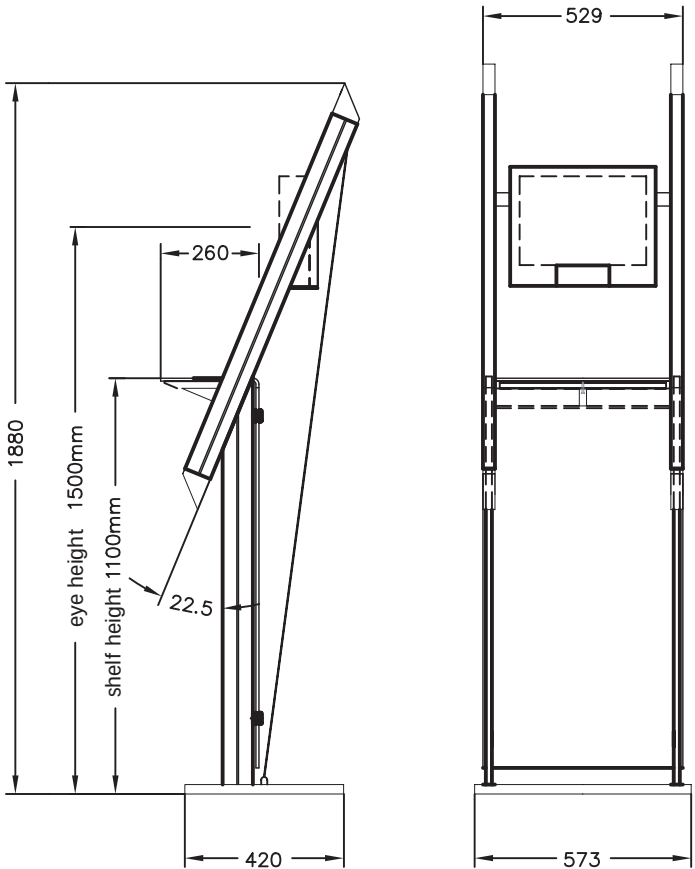


TI KD-7.0 07.03.02/HB geä. 05.07.02/HB 09/05 SHIFT

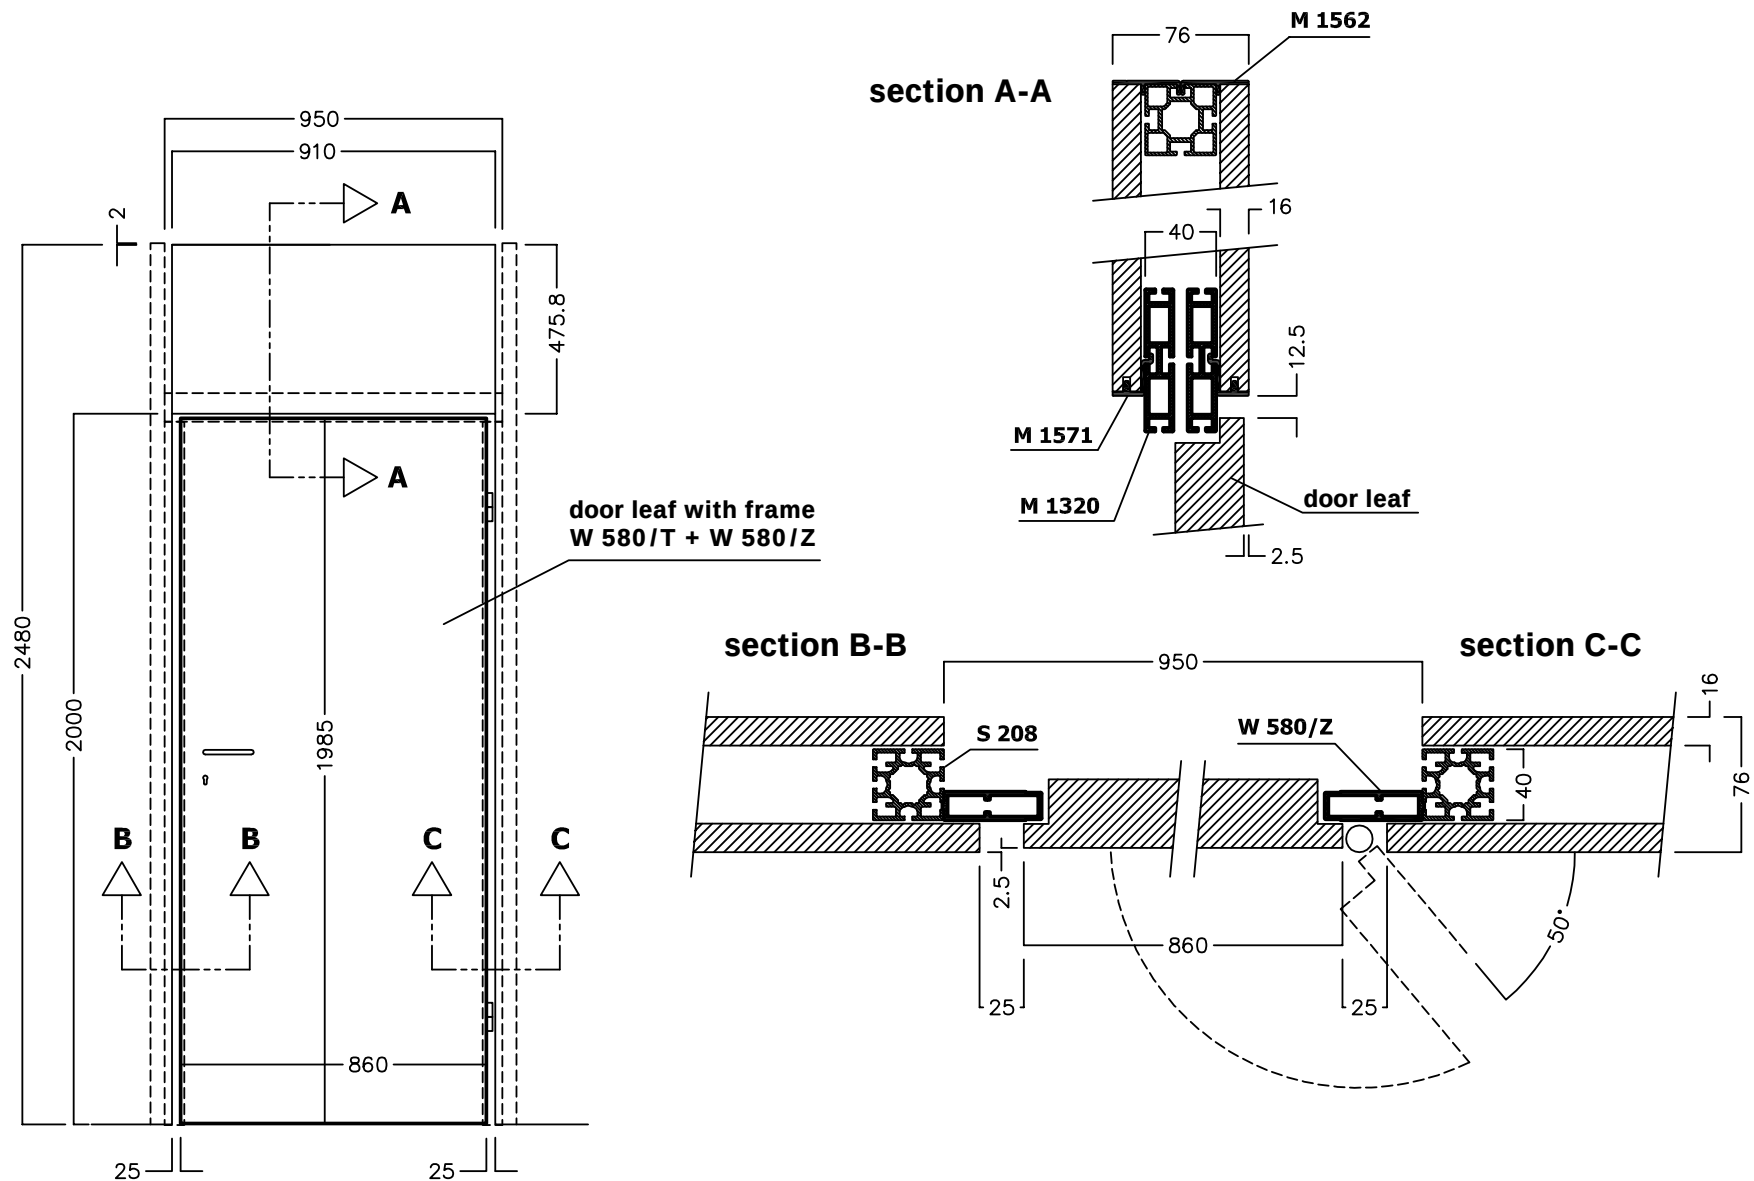

Length of uprights in meter (unsupported length sk)		1.50	2.00	2.50	2.75	3.00
S 108 (Exhibition Programme)		1 877 kp	1 050 kp	680 kp	556 kp	470 kp
S 100 (Exhibition Programme)		600 kp	340 kp	217 kp	§§	§§



Determination according to OMEGA principles.
The indicated values are for vertical loads only. Other values will apply for horizontal or moment loads and must be calculated individually.
§§ = undue slenderness of upright.

TI MB-S 1.0 10/1989 neues Layout 09/2005 shift

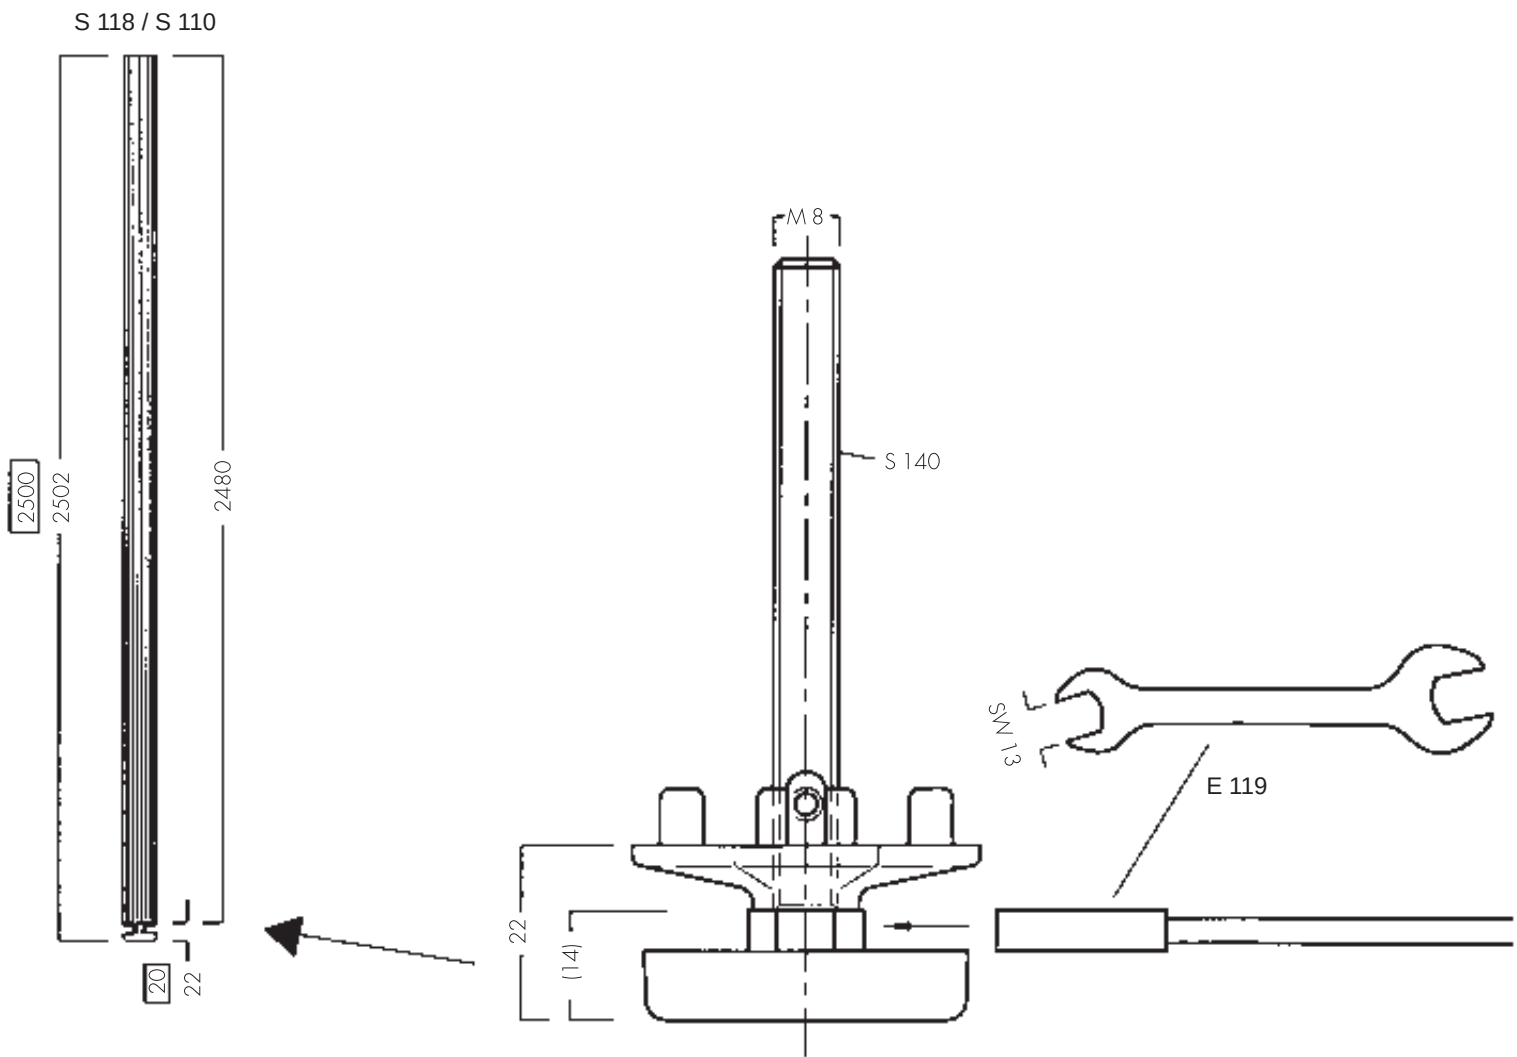


Measurements of wall panels 4 mm
"Panel width"

$$\text{Beam length} + 14 = \text{Panel width}^*$$

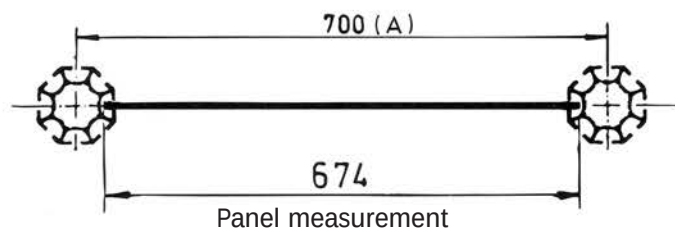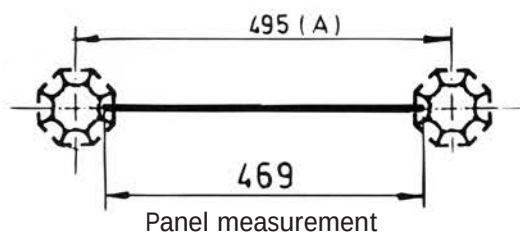

„Panel height” see page W 3.2


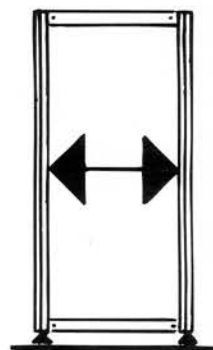


Depth of the groove of the upright
(e.g. S 108) = 7,5 mm

* Panel insertion depth = 2 x 7 mm



(Measurements in mm)

(A) = Axis measurement

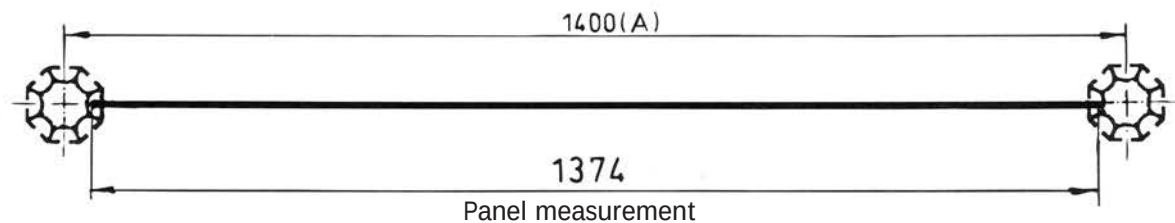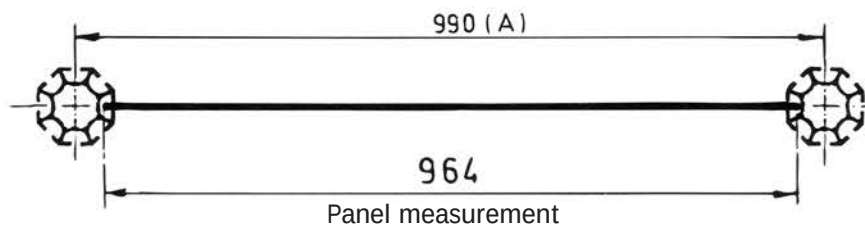


Mesurements of wall panels 4 mm
"Panel width"

$$\text{Beam length} + 20 = \text{Panel width}^*$$

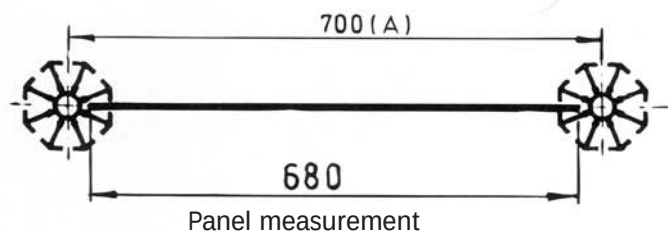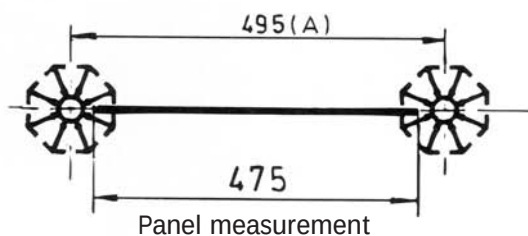

„Panel height“ see page W 3.3


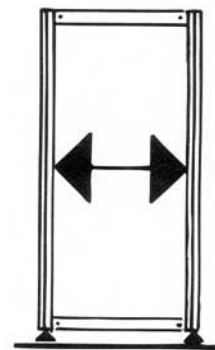


Depth of the groove of the upright
(e.g. S 100) = 10,5 mm

* Panel insertion depth = 2 x 10 mm

(Measurements in mm)

(A) = Axis measurement

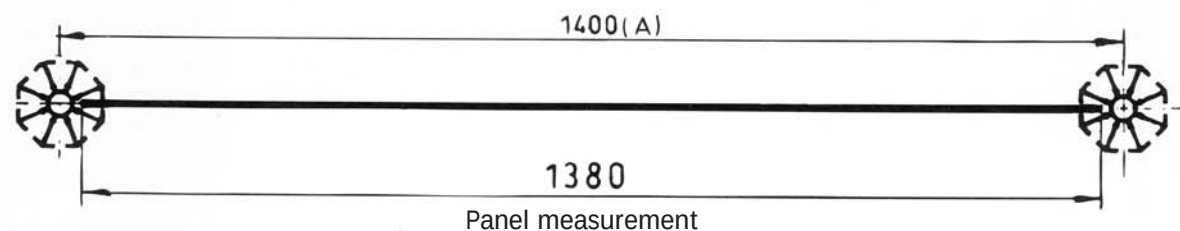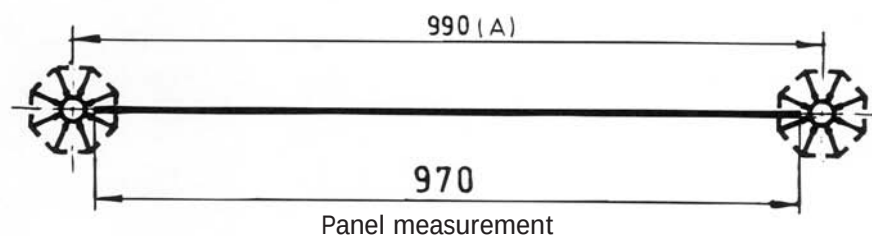


Measurements of wall panels 3 mm

"Panel width"

for application with curved standard beams

Depth of groove of the upright = 7,5 mm

Panel insertion depth = 2×6.5 mm (13)

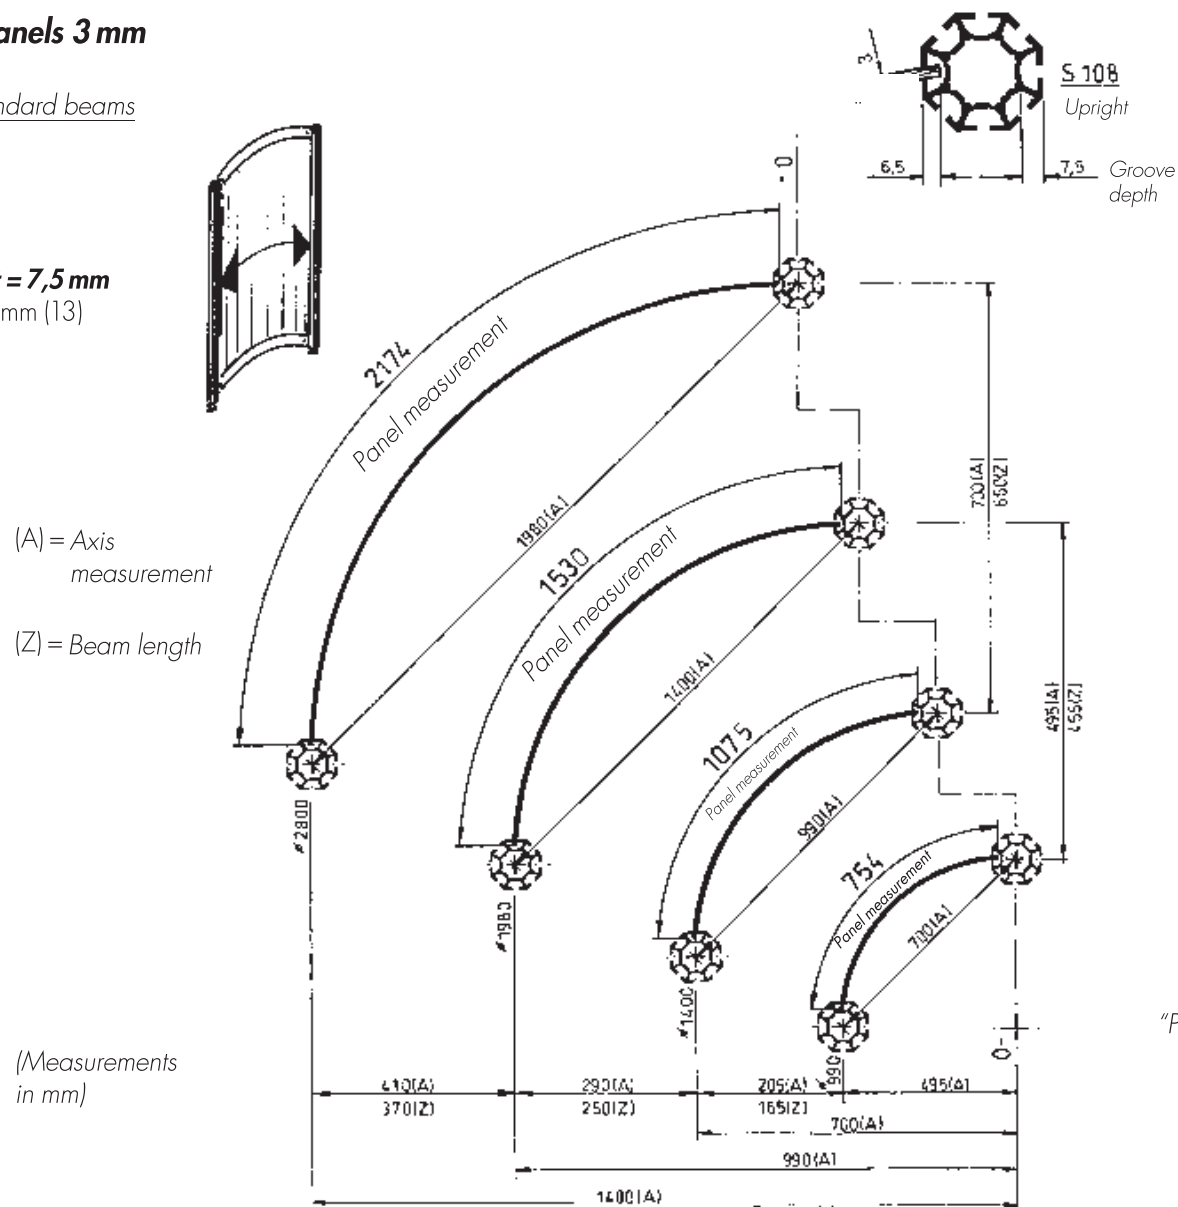

"Panel height" see page W 3.2

Measurements of wall panels 3 mm "Panel width"

for application with curved standard beams


Depth of groove of the upright = 10.5 mm

Panel insertion depth = $2 \times 9 \text{ mm}$ (18)

(A) = Axis
measurement

(Z) = Beam length


(Measurements
in mm)

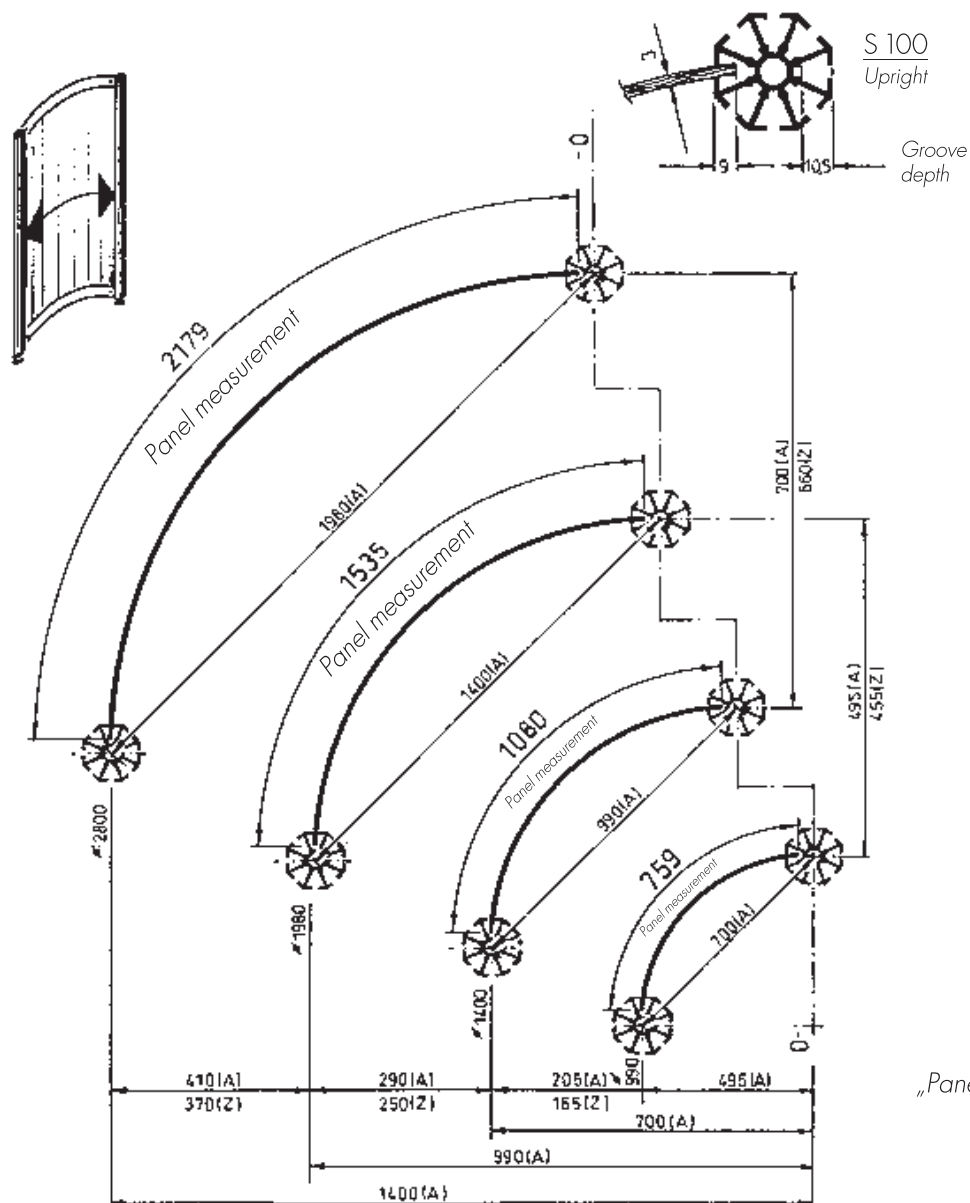

„Panel-height“ see page W 3.3


Measurements of wall panels 3 mm
“Panel width”

for application with curved standard S 108 elements

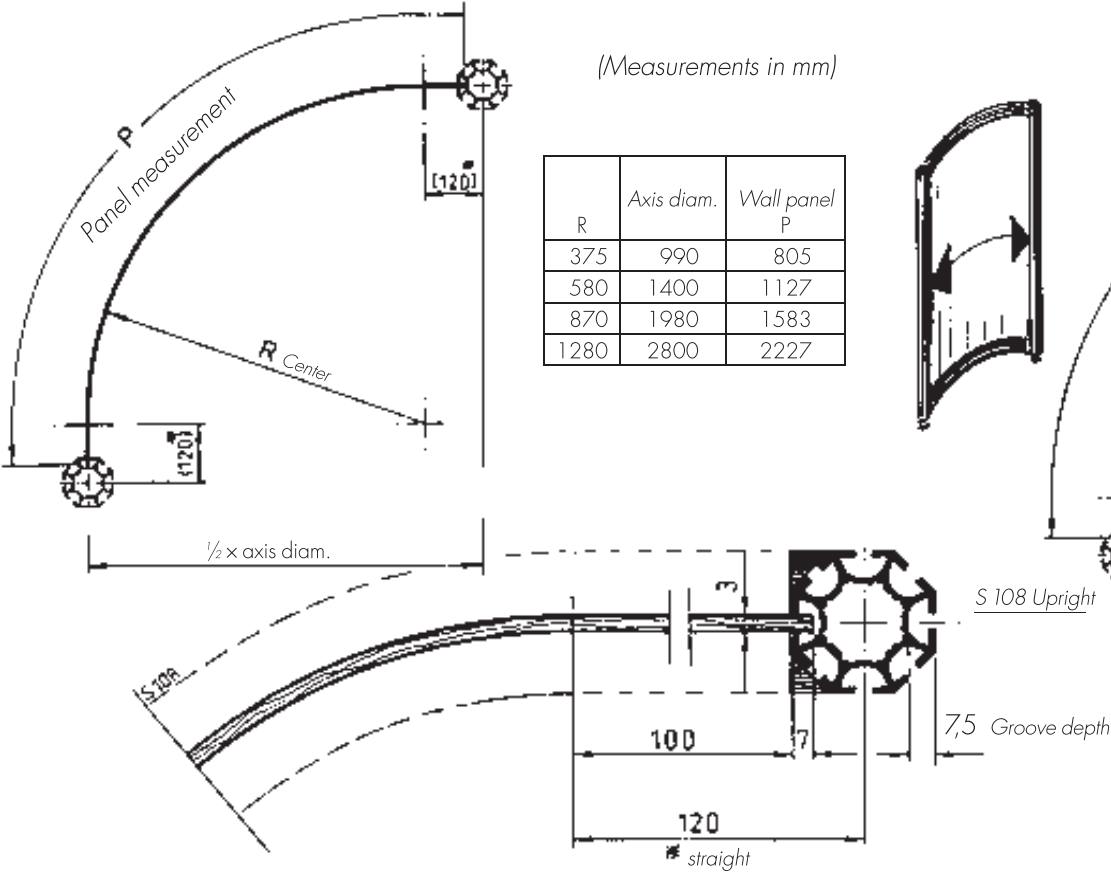


Depth of groove of upright = 7.5 mm

Panel insertion depth = 2 x 7 mm (14)

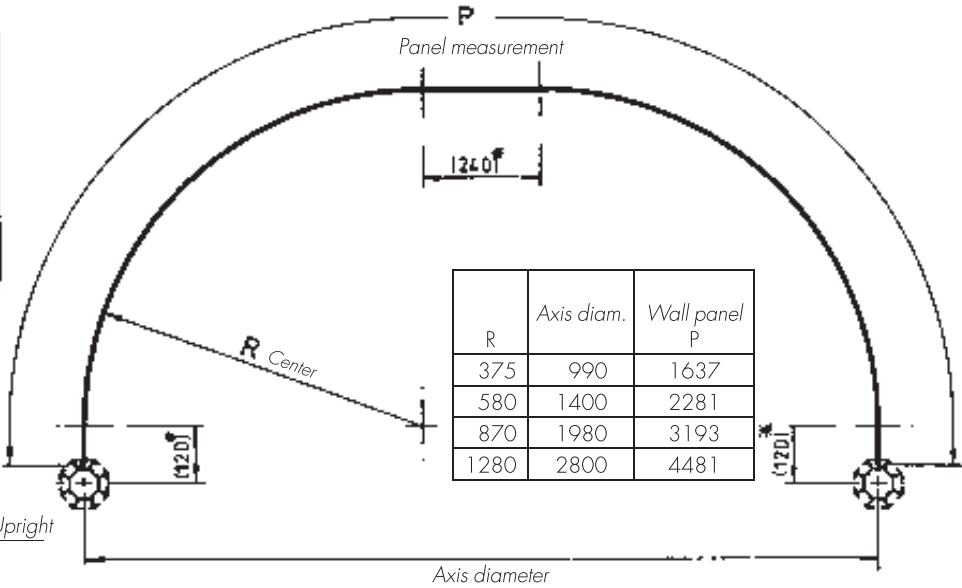


Measurements of wall panels 3 mm
"Panel width"

for application with curved standard S 108 elements

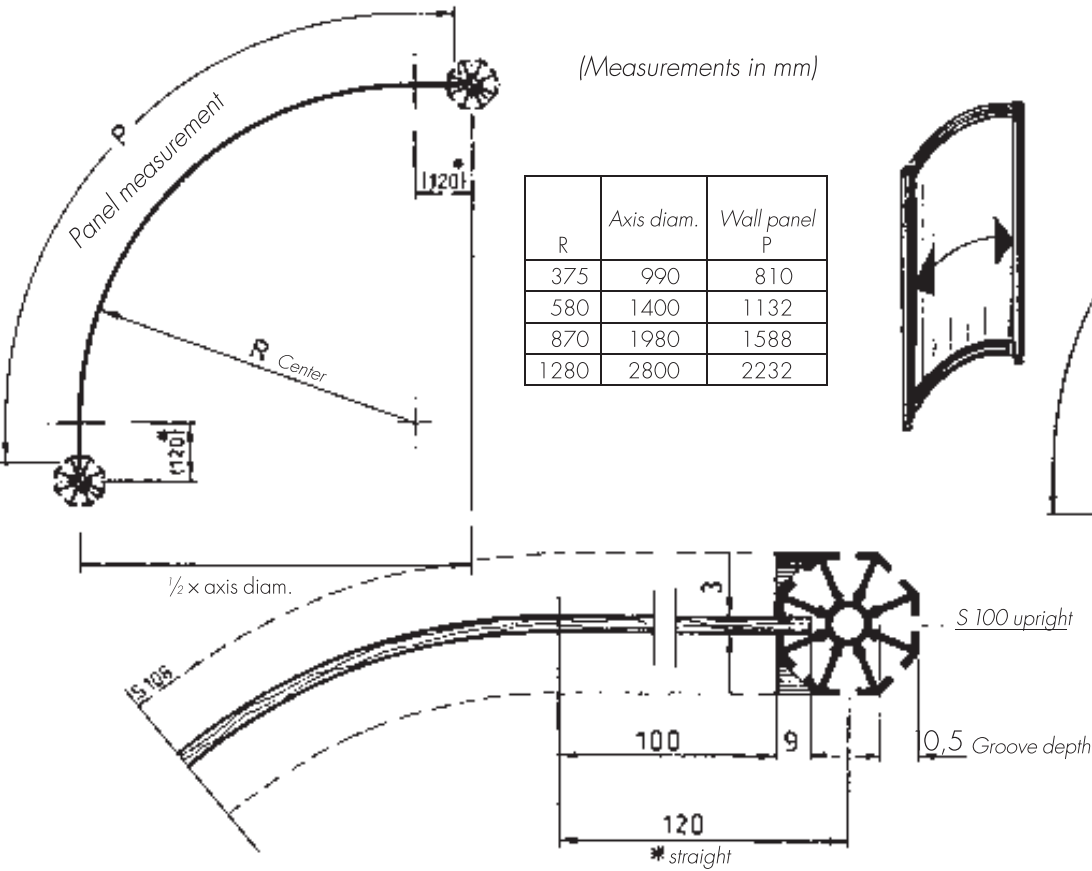

Depth of groove of upright = 10.5 mm


Panel insertion depth = 2 x 9 mm (18)

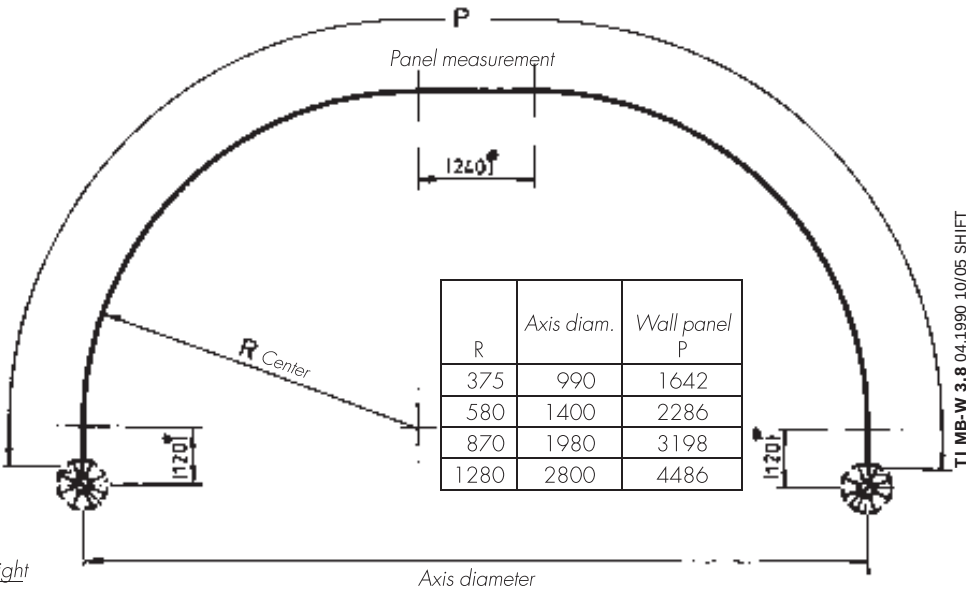




Dimensions for wall panels 3 mm
“Panel width”

to be used in combination with standard curved beams

S 100 upright



S 108 upright

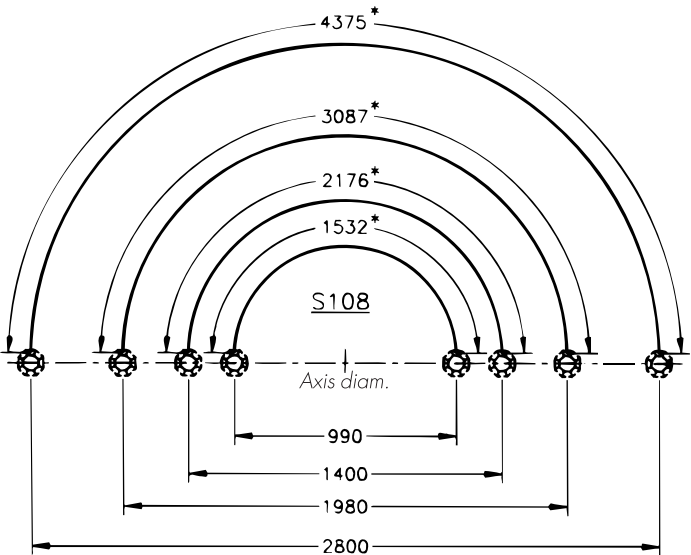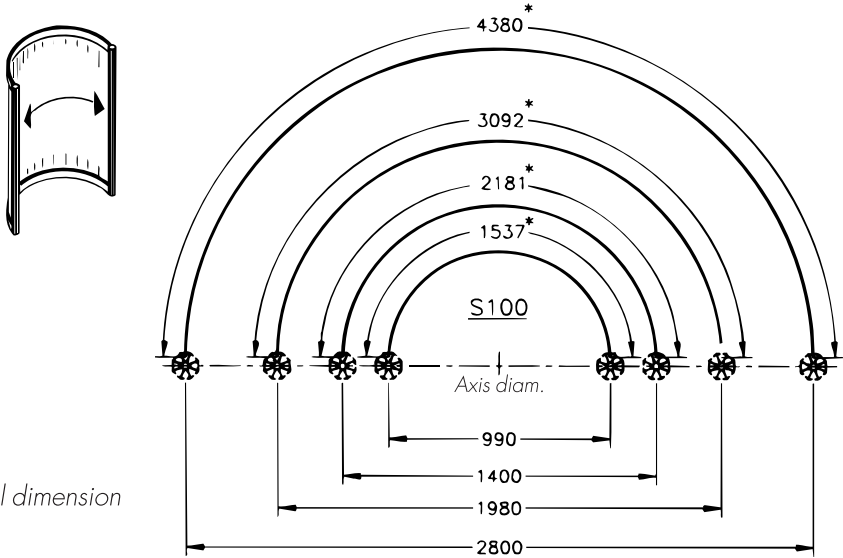


* = Panel dimension

(Measurements in mm)

„Panel -height“ see page W 14.2 or page W 3.3


Measurements of wooden floor panels

Beam length + 22 = Panel dimension (width x depth) ◀


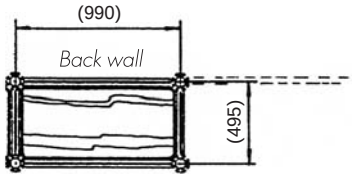


Beam length + 28 = Panel dimension (Depth) ◀


Example





Example 1
Back wall 16 mm

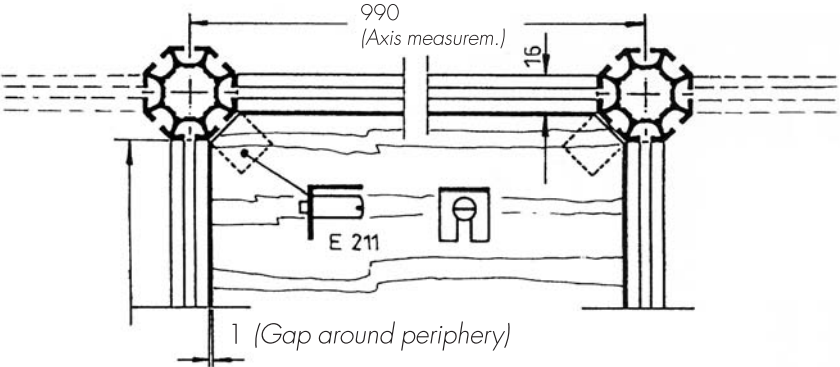


Example



Example 2
Back wall 4 mm

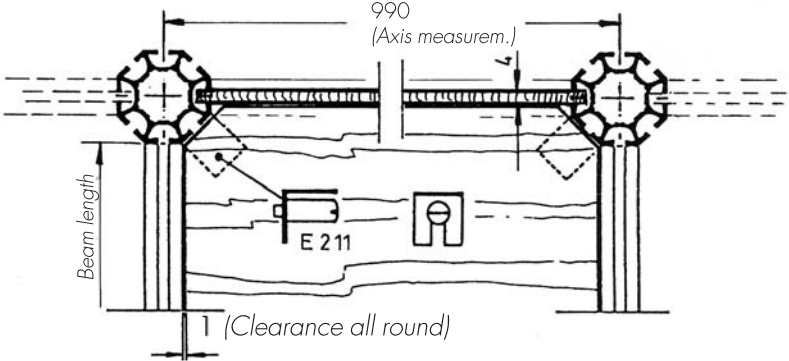


Measurements of wooden supporting panels

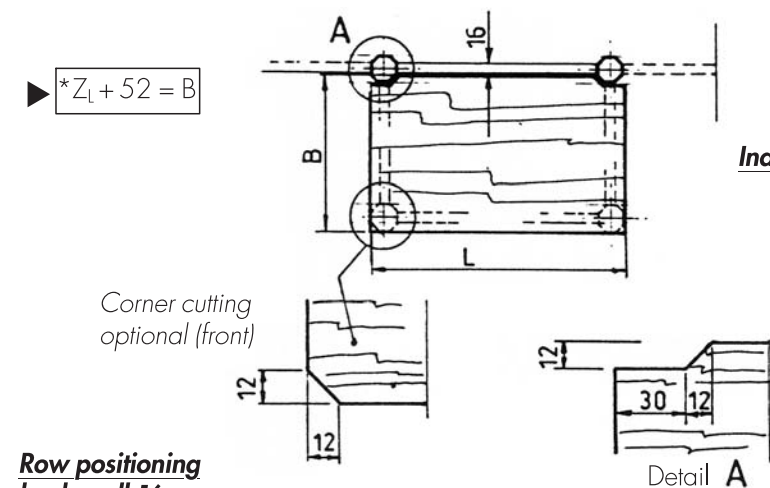


Individual positioning: Back wall 16 or 4 mm


$*Beam\ length + 80 = L$

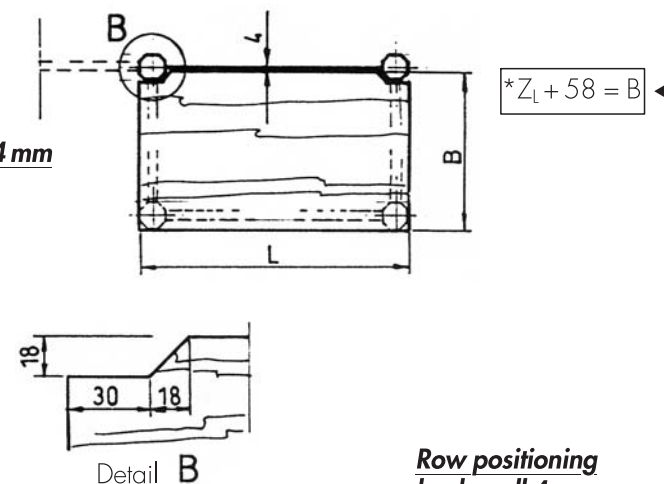


Row positioning
back wall 16 mm

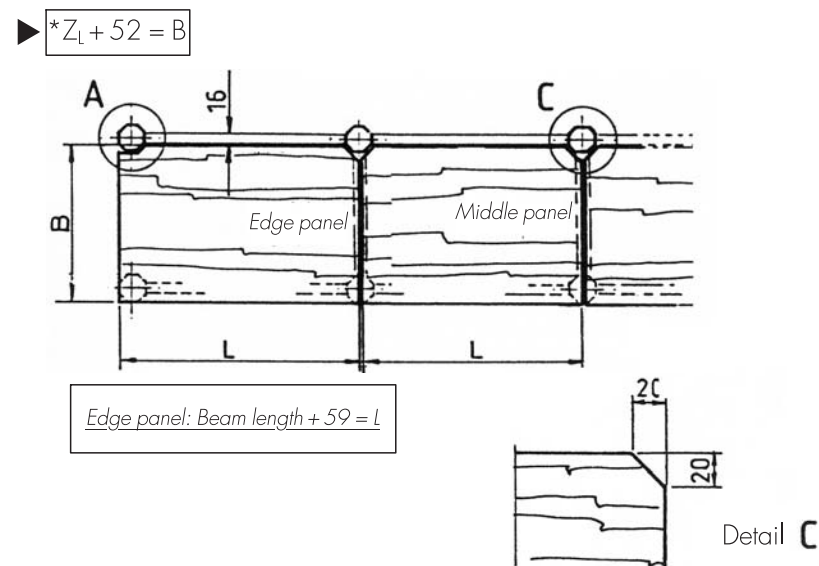



Row positioning
back wall 4 mm

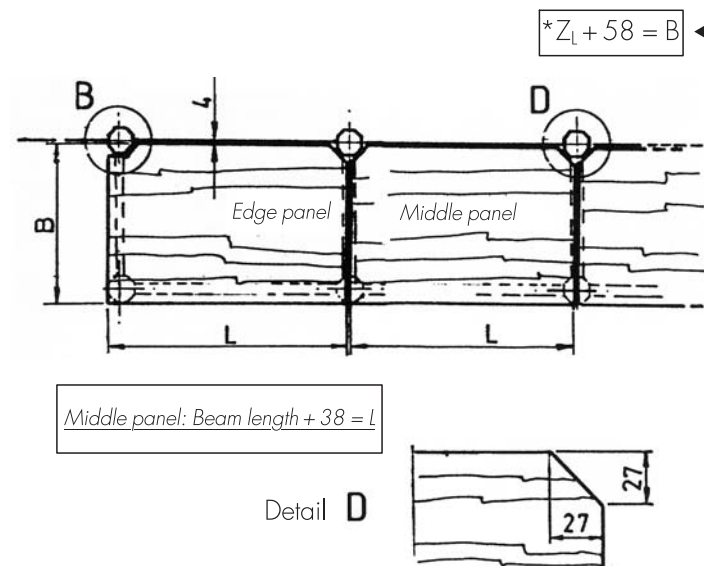

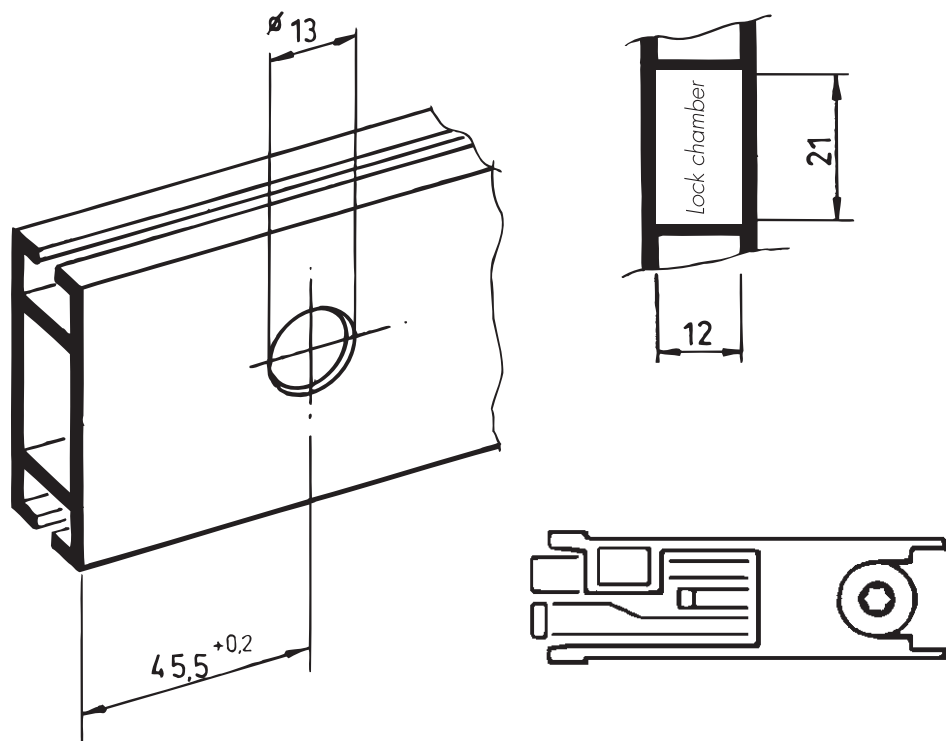

For punching at both ends minimum length 125 mm

Press eccentric head;
insert in beam till it locks

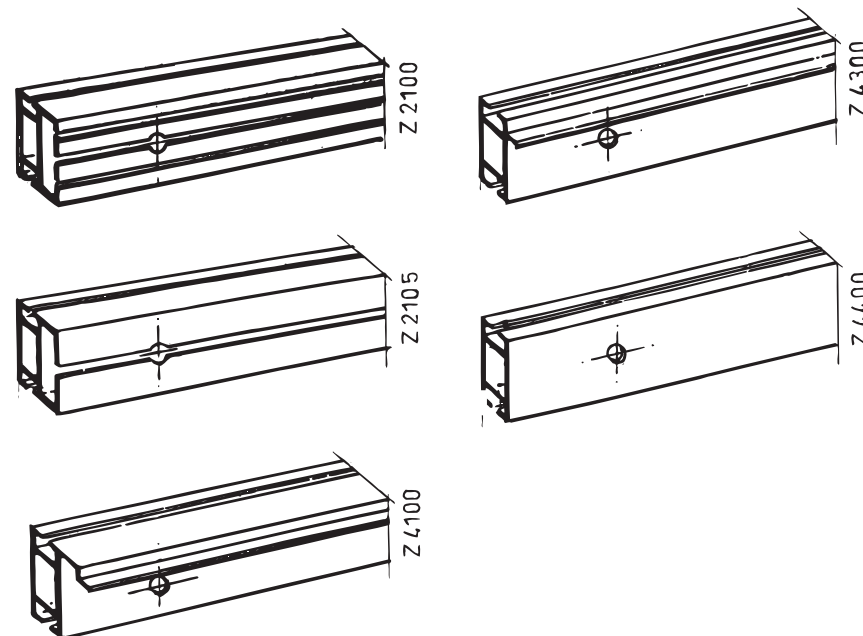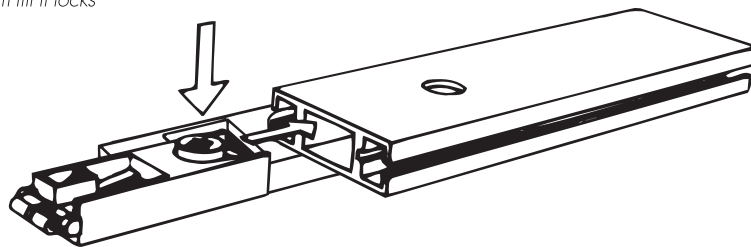

Important:
For exact punching use drilling jig BS 6 at choice with distance piece
(see catalogue "Tools for Mechanical Treatment")



OCTANORM®-Vertriebs-GmbH

für Bauelemente

Raiffeisenstraße 39

70794 Filderstadt, Germany

T +49 711 77003 0

E info@octanorm.de

Adria

↗ octanormadria.com

Australia

↗ octanorm.com.au

Belgium

↗ octanorm.be

China

↗ octanorm.cn

Emirates

↗ octanormemirates.net

Espana

↗ octanorm.es

France

↗ octanorm.fr

Hellas

↗ octanorm.gr

Italia

↗ octanorm.com

Japan

↗ octanorm.co.jp

México

↗ octanorm.com.mx

Nigeria

↗ it-al.design

Nordic

↗ octanorm.se

North America

↗ octanormna.com

Polska

↗ octanorm.pl

South Africa

↗ octanorm.co.za

UK

↗ octanorm.uk

↗ octanorm.com