



octalumina elements





7 Intro

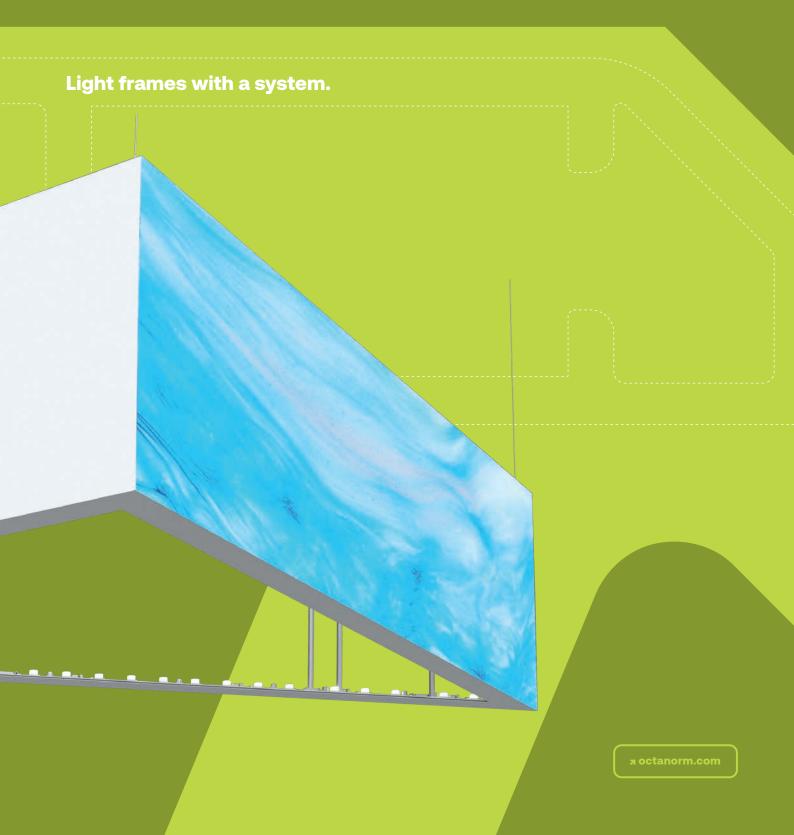


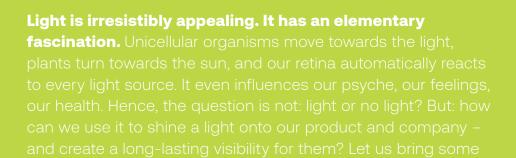

brilliance. xxl format. modular.

Creating new worlds.

Light attracts our attention — quite automatically. This effect, combined with large-format suspended light frames, immerses the viewer in a completely new world. With **octalumina elements**, these kinds of 360° presentation areas in XXL format can be realized quickly and efficiently.

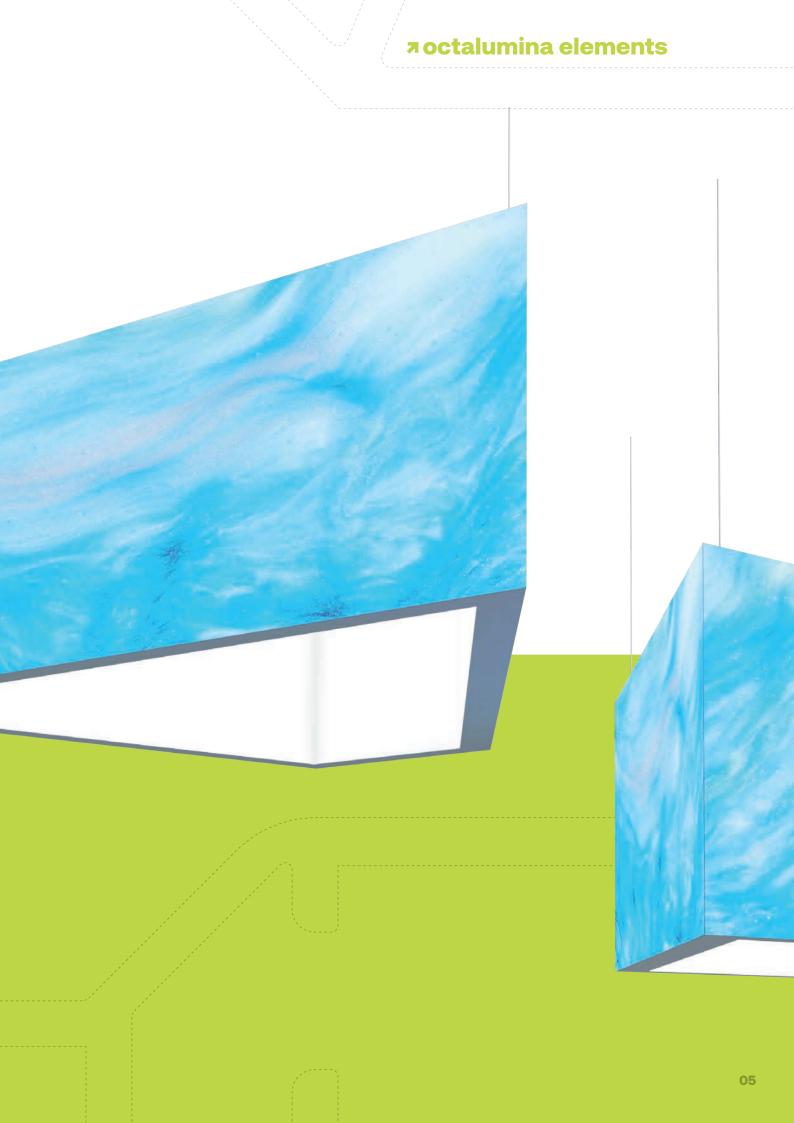



7 Technical Features

octalumina elements



high luminosity



modular design



space-saving



durable and energy saving



plug & play



quick assembly and dismantling



silicone edge graphics

Huge presentation areas without interruptions!

The pre-wired modules can be connected with each other in no time and extended in length as required. The special feature: Fabric graphics are tensioned across elements and fixed in the continuous groove. This creates a maximally large area for individual content without interrupting the motif.

Cost efficient: space-saving and durable.


High-quality products that can be used for decades: We use first-class recycled aluminium for our extrusions and install LEDs that are also durable and at the same time energy-saving. However, costs are reduced not only thanks to many years of use but also because of low storage requirements. The light frames are quickly disassembled and can be stored in a spacesaving manner.

Ten modules for countless ideas.

Five different lengths, four corner elements and one start or end module - this is what sums up **octalumina elements**. True to the motto "Plug & Play", the fixed grid and integrated cabling ensure simplicity from planning to installation.

Advantages:

- → modular design: can be extended as required
- → continuous fabric surfaces
- → closed spaces thanks to corner elements
- → can be combined with octalumina family
- → cost-efficient and reusable

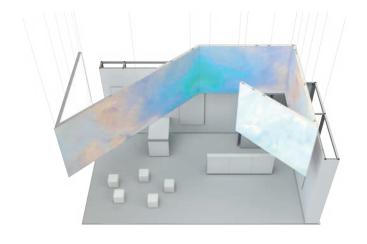




Parts list

2	OL 1265-3000	element 3000 mm
5	OL 1265-2000	element 2000 mm
2	OL 1265-1000	element 1000 mm
2	OL 1265-500	element 500 mm
2	OL 1265-E500	start / end element
2	OL 1265-W45	corner element 45°
1	OL 1265-W90	corner element 90°
1	OL 1265-W135	corner element 135°






Parts list

1	OL 1265-3000	element 3000 mm
3	OL 1265-2000	element 2000 mm
1	OL 1265-500	element 500 mm
2	OL 1265-W45	corner element 45°
4	OL 1265-W90	corner element 90°
2	OL 1265W135	corner element 135°

- 1 OL 1265-So custom size length 475 mm 1 OL 1265-So custom size length 879 mm
- 1 OL 1265-So custom size length 1121 mm
- 1 OL 1265-So custom size length 1475 mm

7 Examples

octalumina elements

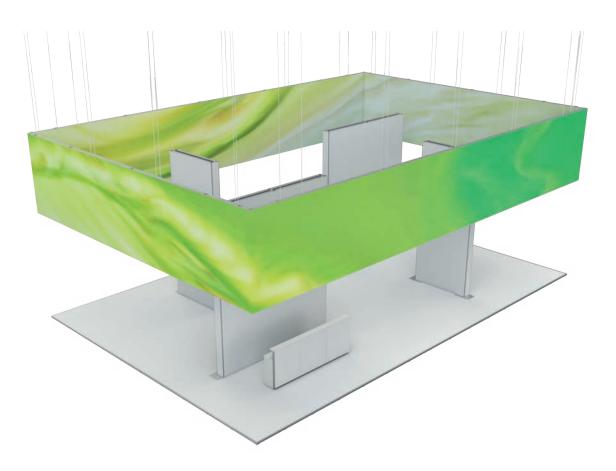

Parts list


14 OL 1265-3000 element 3000 mm 4 OL 1265-1000 element 1000 mm 4 OL 1265-W90 corner element 90°



Please advise height 1000-3000 mm when placing

the order.

Light frame element 3000 mm width



OL 1265-3000

Aluminium | 1 × frame element made of M 1901 with bracing, for double sided back-lit graphics, LED modules (17500 lm, 152 W) and power supply unit 240 W mounted, incl. 1 × cable 2 m with Schuko plug and 4 × screw eye OL 220 for vertical ceiling suspension

W 3000 × H 1000-3000 × D 120 mm



Light frame

element 2000 mm width



OL 1265-2000

Aluminium | 1 × frame element made of M 1901 with bracing, for double sided back-lit graphics, LED modules (11500 lm, 100 W) and power supply unit 150 W mounted, incl. 1 × cable 2 m with Schuko plug and 3 × screw eye OL 220 for vertical ceiling suspension

W 2000 × H 1000-3000 × D 120 mm



Please advise height 1000-3000 mm when placing the order.

Light frame element 1000 mm width



OL 1265-1000

 $\label{eq:Aluminium} \begin{tabular}{ll} Aluminium & 1 \times frame element made of M 1901 \\ with bracing, for double sided back-lit graphics, LED \\ modules (5500 lm, 48 W) and power supply unit \\ 60 W mounted, incl. 1 \times cable 2 m with Schuko plug \\ and 2 \times screw eye OL 220 for vertical ceiling \\ suspension \end{tabular}$

W 1000 × H 1000-3000 × D 120 mm



Light frame

element 500 mm width



Please advise height

1000-3000 mm when placing the order.

OL 1265-500


Aluminium | 1 × frame element made of M 1901 with bracing, for double sided back-lit graphics, LED modules (2500 lm, 22 W) and power supply unit 60 W mounted, incl. 1 × cable 2 m with Schuko plug and 2 × screw eye OL 220 for vertical ceiling suspension

W 500 \times H 1000–3000 \times D 120 mm



Light frame element


element custom size



OL 1265-So

 $\begin{tabular}{ll} \textbf{Aluminium} & | 1 \times \text{frame element made of M 1901} \\ with bracing, for double sided back-lit graphics, LED modules and power supply unit mounted, incl. 1 \times cable 2 m with Schuko plug and screw eye OL 220 for vertical ceiling suspension \\ \end{tabular}$

W 500-3000 × H 1000-3000 × D 120 mm



10

Custom size:

Please advise dimensions

when placing the order.

7 Components

octalumina elements

Light frame start/end

start/end 500 mm width



OL 1265-E500

Aluminium | 1 × end frame element made of M 1901 with bracing and end extrusion, for double sided back-lit graphics, LED modules (2500 Im, 22 W) and power supply unit 60 W mounted, incl. 1 × cable 2 m with Schuko plug and 2 × screw eye OL 220 for vertical ceiling suspension

W 500 × H 1000-3000 × D 120 mm



Please advise height 1000-3000 mm when placing the order.


Light frame element 90° corner



OL 1265-W90

Aluminium | 1 × corner frame element 90° made of M 1901 with bracing, for double sided back-lit graphics, LED modules (3000 lm, 26 W) and power supply unit 60 W mounted, incl. 1 × cable 2 m with Schuko plug and 2 × screw eye OL 220 for vertical ceiling suspension

W 500 × H 1000-3000 × D 500 mm



Please advise height 1000-3000 mm when placing the order.


Light frame element 45° corner



OL 1265-W45

Aluminium | 1 × corner frame element 45° made of M 1901 with bracing, for double sided back-lit graphics, LED modules (3000 lm, 26 W) and power supply unit 60 W mounted, incl. 1 × cable 2 m with Schuko plug and 2 × screw eye OL 220 for vertical ceiling suspension

W 500 × H 1000-3000 × D 354 mm



Please advise height 1000-3000 mm when placing the order.


Light frame element 60° corner



OL 1265-W60

Aluminium | 1 × corner frame element 60° made of M 1901 with bracing, for double sided back-lit graphics, LED modules (3000 lm, 26 W) and power supply unit 60 W mounted, incl. 1 × cable 2 m with Schuko plug and 2 × screw eye OL 220 for vertical ceiling suspension

W 500 × H 1000-3000 × D 433 mm



Please advise height 1000-3000 mm when placing the order.


Light frame element 135° corner



OL 1265-W135

Aluminium | 1 × corner frame element 135° made of M 1901 with bracing, for double sided back-lit graphics, LED modules (3000 lm, 26 W) and power supply unit 60 W mounted, incl. 1 × cable 2 m with Schuko plug and 2 × screw eye OL 220 for vertical ceiling suspension

W 500 × H 1000-3000 × D 438 mm



Custom size:
Please advise
dimensions
when placing
the order.








7 In Action


octalumina elements





exhibition systems project solutions cleanroom solutions

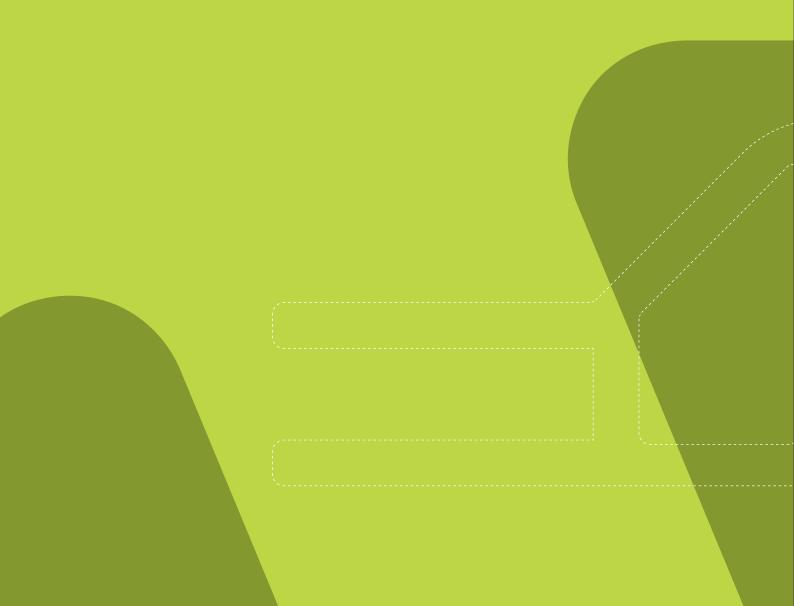

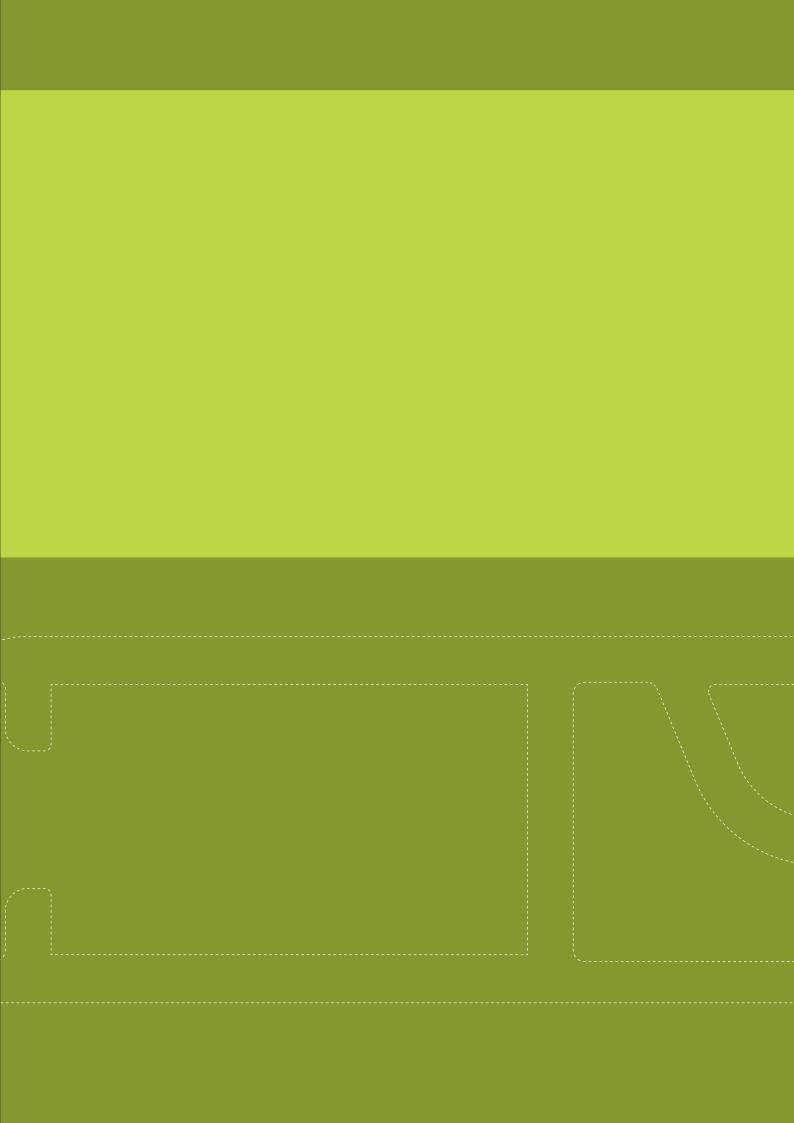

octanorm 72°

OCTANORM®-Vertriebs-GmbH

E info@octanorm.de

Adria

z octanormadria.com

Australia

 σctanorm.com.au

Belgium octanorm.be

China

₹ octanorm.cn

Emirates

España

₹ octanorm.es

France

Hellas

→ octanorm.gr

Italia

Japan 7 octanorm.co.jp

México

Nigeria 7 it-al.design

Nordic

North America

₹ octanormna.com

Polska

₹ octanorm.pl

South Africa

₹ octanorm.co.za

₹ octanorm.co.uk