
octanorm 7°

octanorm general catalog

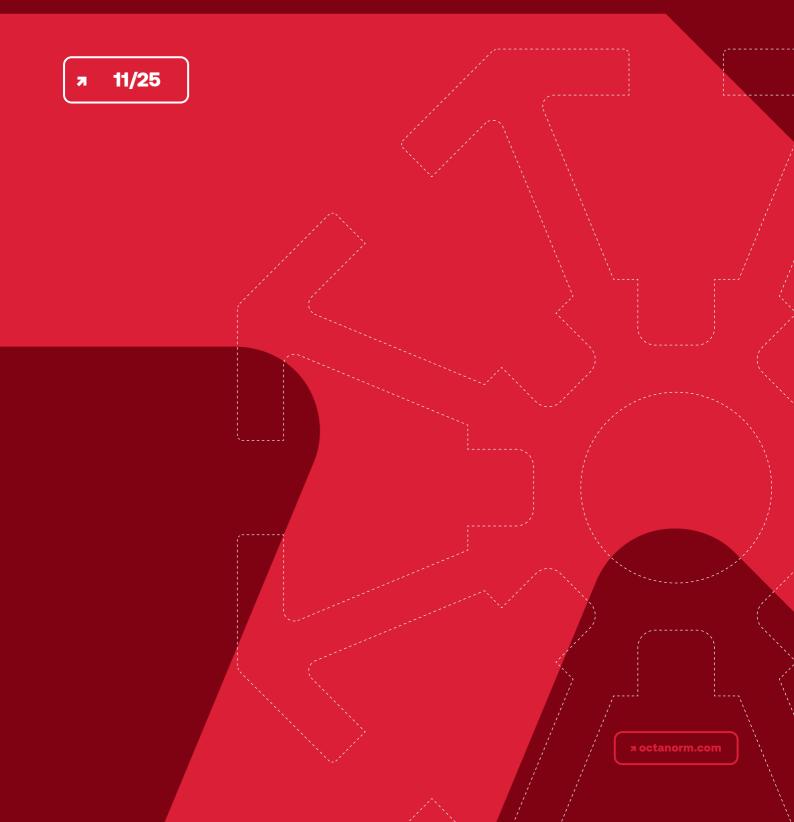

We believe in SYS tems.

7 Contents

■ General Info ■ Ge	
About octanorm Abou	4
→ Surfaces →	8
→ Grid →	10
→ Our Systems →	12
▼ Extrusion systems	
→ octaclassic →	17
▼ maxima	59
→ octalux	163
↗ tension fabric extr.	183
shop fitting	207
	237
尽 Frame systems	
⊿ octawall 40	257
→ octawall pro	299
→ Illuminated frame systems	
→ octalumina	331
→ Double deck system → Double deck sys	
→ octamax	445
▼ Truss system ▼ Tr	105
σ octarig σ octar	485
- Davida dia manakana	
尽 Double floor system	F02
σ octafloor σ oct	503
↗ Additional Parts	
	529
additional extrusions	539
additional accessories	545
⊿ tools	563

About octanorm

octanorm. we believe in systems.

We have been developing modular solutions in the fields of exhibitions, architecture and cleanrooms for over 55 years. What began in 1969 with an octagon is today a global standard for flexible, sustainable design.

What is our mission? To create inspirational spaces. Swiftly, precisely, worldwide. With our network and innovative tools such as the **ai booth designer**, we reimagine construction systems in a digital, modular and sustainable approach.



Blejans





ai booth designer



A new dimension in booth design: The **ai booth designer** drafts creative designs for exhibits in seconds – flexibly, individually and perfectly suited to all requirements. **Give it a go – scan the QR code!**

About octanorm

Locally produced, globally engaged.

Global presence. Local roots.

With over 220 employees worldwide and a network of licensees and sales representatives from 18 countries, octanorm offers its customers global solutions with a strong local base. Our regional production ensures swift delivery times, reduced CO₂ emissions and maximum flexibility at local level. From exhibition construction to cleanroom solutions – worldwide, always in octanorm quality.



Because great ideas often come from outside of the box.

Our industry does not tolerate delays or failures. The best solution must always reach the customer as quickly as possible. Since our company produces locally worldwide, we are never more than a call away from our customers in Germany and abroad.

As an established brand in exhibition construction systems it goes without saying that we offer standardized solutions in consistently high quality. Yet just such groundbreaking ideas often demand implementations that defy DIN standards. We develop our products so that they can be tailored to suit exactly what our partners want. Our state-of-the-art machinery ensures that production processes are swifter and lead times shorter.

About octanorm

For a better tomorrow.

Responsibility that embraces more than the product.

As part of a global network **octanorm's** responsibility goes beyond construction: It encompasses fair partnerships, efficient communication in the **ospi** network and social projects worldwide. We work exclusively with partners who share our values, promote educational institutions and organize fundraising campaigns – because the future is not only built, but also shaped with the help of partners.





About octanorm

Sustainability begins in the system.

octanorm stands for long-lasting solutions rather than short-lived constructions. Our modular aluminium systems can be reused for decades – they are flexible, expandable and environmentally friendly. Recycled secondary aluminium extrusions save up to 95 % energy compared to primary production. Our double floor system, **octafloor eco**, is yet another standard setter. Made of recycled plastic, it can be fully recovered and restored to the resource cycle.

CO₂ emissions in tons

Air freight



Sea freight 1



Sea freight 2



Less transportation. More responsibility.

The **ospi** network from **octanorm** stands for smart, international cooperation. Based on the principle of "Designed here. Built there", exhibition stands are planned at the home location and built locally in the target country, eliminating the need for worldwide transport of materials.

This decentralized production process reduces CO₂ emissions by up to 65%. Rather than shipping components thousands of kilometers by air or sea, an **ospi** handles the implementation on site. This saves resources, time, effort, and logistics. A system that thinks globally – and protects locally.

ospi t

Further information on sustainability and the 17 SDGs can be found on our topic page online



Surfaces

	coding	surface
raw	.00	unfinished
matt anodized	.01 .02 .03 .04	
polished anodized	.11 .14 .19	silver (E2/EV1, E4/EV1) gold (E4/EV3) stainless steel optics (E2/3115)
powder coated	.20 .21 .23 .28	· · · · · · · · · · · · · · · · · · ·
as per product description of the accessories	.30 .31 .32 .33 .35 .36 .37 .38 .39 .40 .41 .42 .43 .44 .46 .50 .51	black light grey grey zinc-plated nickel-plated
coil coated for cleanroom products	.70 .71 .75 .76 .77 .78 .80 .85	white (RAL 9002)
custom	.90 .99	as per catalog description as per order description

Angular dimension / octagon extrusion





•









270°



45°


90°

Beam dimension

octagonal upright extrusion

standard beams


axial dimensions

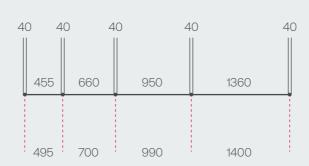

Round beam dimension

Ø axial diameter


axial dimension straight beams

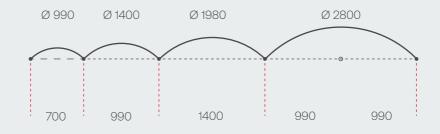



Grid

Axial dimension standard beams








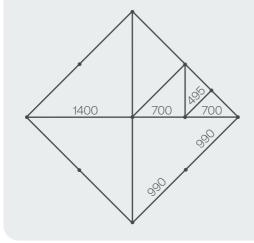


Axial dimension standard round beams




Ø 990



Ø 1400



Ø 1980

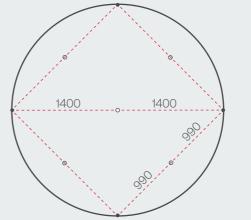

Ø 2800

Our Systems

Extrusion systems









15



























443








Our Systems

Double floor system







501







527









7 Extrusion systems

Overview



maxima



octalux


7 Extrusion systems




octalux



maxima

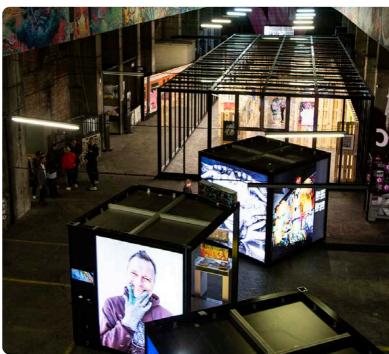

octaclassic uprights + beams

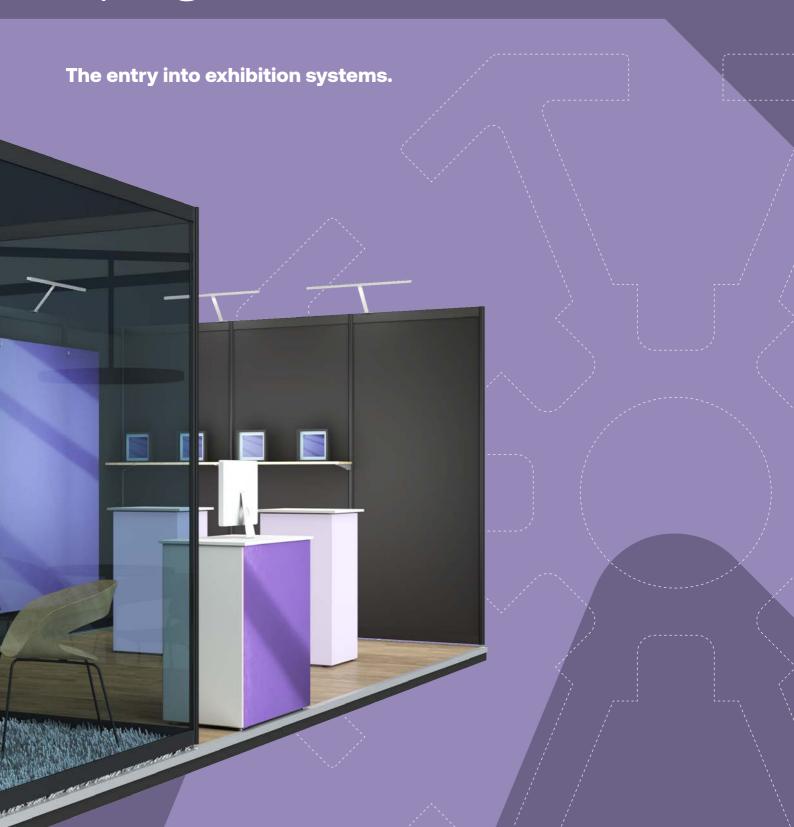

Index

7 TECHNICAL FEATURES	18
₹ OVERVIEW	20
₹ COMPONENTS	
Basic parts ■	24
Accessories Acces	34
7 Doors	43
¬ Fabric/Panel/Glass	47
7 Hinges	49
□ Electrical parts □ Electrical	52
7 Products	56





Technical features



upright



beam



light weight



reusable



fast assembly



patented tension lock



accessories

Many booths. Quickly assembled.


Consisting of uprights and beams, the construction can be assembled in no time – without a lot of individual parts. Thanks to a fixed grid, the extrusions can be combined again and again: flexibly adaptable to booth size and type. From small, connected row booths to large island stands: **octaclassic** allows you to create system booths in an easy way.


Individual booths despite system construction? Definitely!


Curved beams and an upright that can be connected at a 45° angle: Be creative and use the freedom to break out of the rectangular booth designs. The stand becomes alive and unique not only through its basic form, but also through the graphics. Choose panel, glass or fabric as a base. We have the right solution to show your advertising message to the outside world

Accessories to set the scene for your products.

The system groove allows a wide range of accessories to be integrated: from shelves and picture frames to spotlights or cable ducts. Guaranteed to fit and easy to install. In addition to **octaclassic** counters and counter tops, the system can also be combined with other **octanorm** systems such as **octalumina** light frames. **octaclassic** is a system that can be easily expanded.

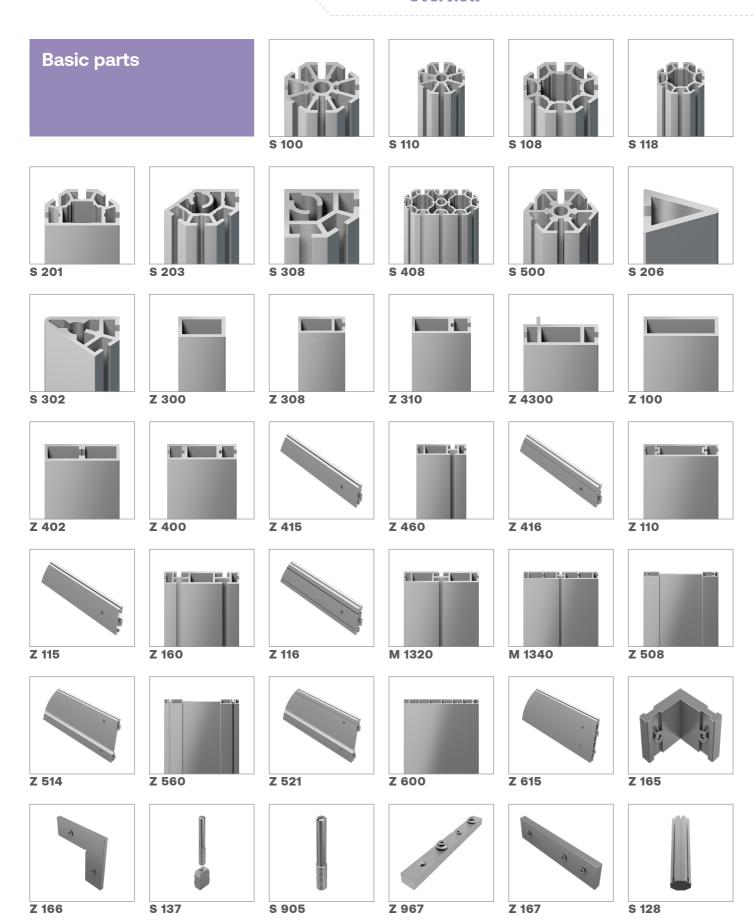

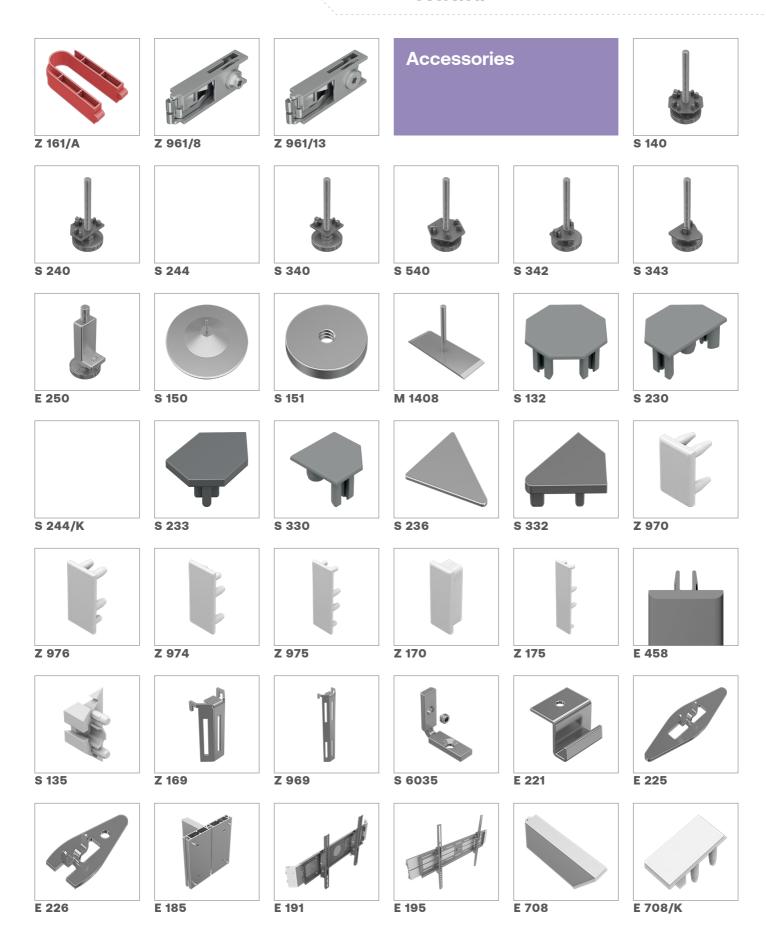

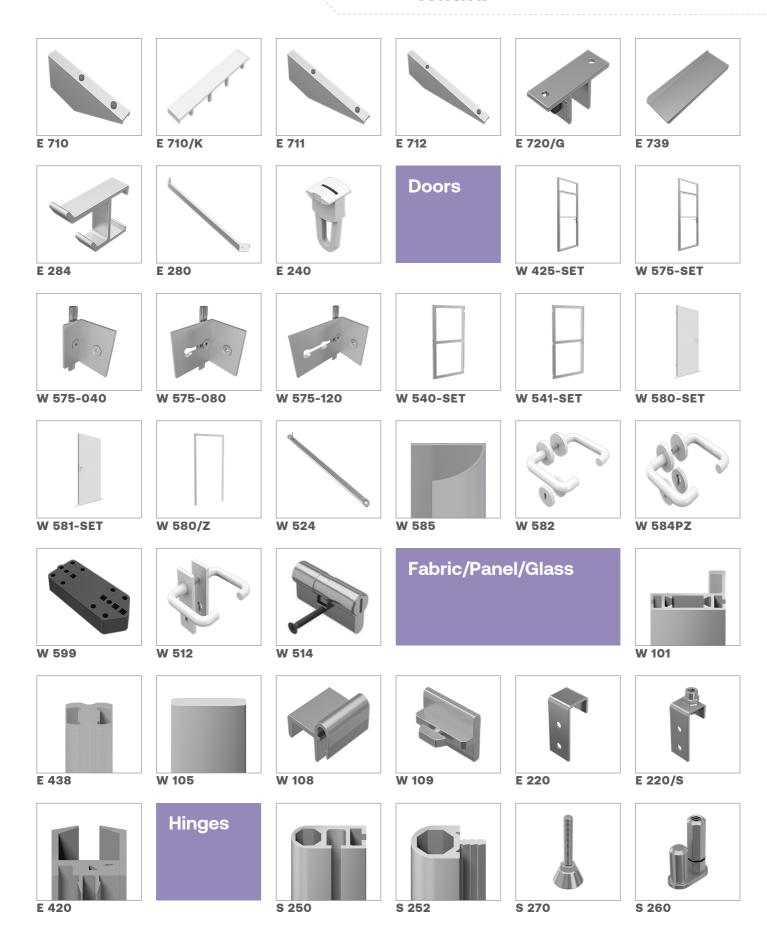






















































Basic parts


Upright extrusion


groove depth 10 mm L 5000 × W 40 × H 40 mm



S 100.01 | .11

groove depth 10 mm aluminium | L 5000 \times W 40 \times H 40 mm | 14.78 lbs





Upright

incl. adjustable foot S 140 L 40 × W 40 × H 2502 mm




S 110.01 | .11

1 × upright made of S 100, incl. 1 × adjustable foot S 140, 40 × 40 mm

aluminium | L 40 × W 40 × H 2502 mm | 7.43 lbs





Upright extrusion


groove depth 7 mm L 5000 × W 40 × H 40 mm



S 108.01 | .11

tension lock Z 961/8 can be mounted in 4 $\,$ positions, groove depth 7 $\,$ mm $\,$

aluminium | L 5000 × W 40 × H 40 mm | 11.561 lbs





Upright

with adjustable foot S 140 L 40 × W 40 × H 2502 mm




S 118.11

1 × upright made of S 108, with 1 × adjustable foot S 140, groove depth 7 mm

aluminium | L 40 \times W 40 \times H 2502 mm | 6.129 lbs






Upright extrusion


180° L 5000 × W 40 × H 40 mm



S 201.01 | .11

180°, tension lock Z 961/8 can be mounted, groove depth 7 mm aluminium | L 5000 \times W 40 \times H 40 mm | 9.365 lbs





Basic parts


Upright extrusion


135° L 5000 × W 40 × H 28 mm



S 203.01 | .11

135°, groove depth 7 mm aluminium | L 5000 × W 40 × H 28 mm | 10.728 lbs






Upright extrusion


90° L 5000 × W 28 × H 28 mm



S 308.01 | .11

90°, groove depth 7 mm aluminium | L 5000 × W 28 × H 28 mm | 9.127 lbs





Upright extrusion


groove depth 7 mm L 5000 × W 80 × H 40 mm




S 408.11

tension lock Z 961/8 can be mounted in 2 $\,$ positions, groove depth 7 $\,$ mm $\,$

aluminium | L 5000 × W 80 × H 40 mm | 27.866 lbs






Upright extrusion

groove depth 10 mm L 5000 × W 40 × H 40 mm



S 500.01 | .11

groove depth 10 mm aluminium | L 5000 \times W 40 \times H 40 mm | 15.388 lbs





Interior corner extr.


45° L 5000 × W 17.5 × H 20 mm



S 206.01

for triangular showcases using 45° angles aluminium | L 5000 \times W 17.5 \times H 20 mm | 3.108 lbs





Basic parts

Upright extrusion


45° L 5000 × W 35 × H 28 mm



S 302.01 | .11

45°, groove depth 7 mm ${\rm aluminium \ | \ L\ 5000 \times W\ 35 \times H\ 28\ mm\ | \ 8.885\ lbs}$





Beam extrusion


for Z 961/13 L 5000 × W 25 × H 16 mm



Z 300.01 | .11

tension lock Z 961/13 can be mounted aluminium | L 5000 \times W 25 \times H 16 mm | 4.502 lbs





Beam extrusion

for bracing groove depth 7 mm




Z 308.01 | .11

for bracing, tension lock Z 961/13 can be mounted, groove depth 7 $\,$ mm $\,$

aluminium | L 5000 \times W 32 \times H 16 mm | 5.908 lbs






Beam extrusion

groove depth 10 mm L 5000 × W 37 × H 16 mm



Z 310.01 | .11


tension lock Z 961/13 can be mounted, groove depth 10 mm aluminium | L 5000 \times W 37 \times H 16 mm | 6.53 lbs






Beam extrusion

2 system grooves L 5000 × W 40 × H 16 mm



Z 4300.01

2 system grooves, tension lock Z 961/13 can be mounted aluminium | L 5000 \times W 40 \times H 16 mm | 7.804 lbs



Basic parts


Beam extrusion


without system groove L 5000 × W 43 × H 16 mm



Z 100.01 | .11

without system groove aluminium | L 5000 \times W 43 \times H 16 mm | 6.922 lbs





■ for mounting tension lock Z 961/13 you need the adaptor Z 161/A

Beam extrusion


for 2 × Z 961/13 L 5000 × W 50 × H 16 mm



Z 402.01

 $2\times$ tension lock Z 961/13 can be mounted one on top of the other aluminium | L 5000 \times W 50 \times H 16 mm | 8.289 lbs






Beam extrusion

groove depth 10 mm L 5000 × W 50 × H 16 mm



Z 400.01 | .11

tension lock Z 961/13 can be mounted, groove depth 10 mm aluminium | L 5000 \times W 50 \times H 16 mm | 9.678 lbs





Beam


with 2 × Z 961/13 L 455 × W 50 × H 16 mm




Z 415.01 | .11

1 × beam made of extrusion Z 400, incl. 2 × built-in tension lock Z 961/13

aluminium | L 455 \times W 50 \times H 16 mm | 1.093 lbs





Weitere Abmessungen:

Z 420.01 | .11 Z 425.11 Z 430.01 | .11 L 660 × B 50 × H 16 mm L 950 × B 50 × H 16 mm L 1360 × B 50 × H 16 mm 1.651 lbs 1.964 lbs 3.49 lbs

■ Curved beams on request

Basic parts

Beam extrusion


groove depth 7 mm L 5000 × W 50 × H 16 mm



Z 460.01 | .11

for installation of cube illumination, installation of Z 951/13 tension lock, groove depth 7 \mbox{mm}

aluminium | L 5000 × W 50 × H 16 mm | 8.719 lbs

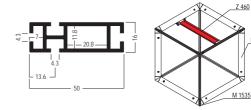

M 1504

Beam


with 2 × Z 961/13 L 455 × W 50 × H 16 mm



Z 416.01 | .11

1 × beam made of extrusion Z 460, incl. 2 × built-in tension lock Z 961/13

aluminium | L 455 × W 50 × H 16 mm | 1.193 lbs



Weitere Abmessungen:

Z 421.01 | .11

Z 426.11

Z 431.01

L 660 × B 50 × H 16 mm 1.605 lbs L 950 × B 50 × H 16 mm 2.127 lbs L 1360 × B 50 × H 16 mm 3.38 lbs

→ Curved beams on request

Beam extrusion


groove depth 10 mm L 5000 × W 70 × H 16 mm




Z 110.01 | .11

groove depth 10 mm

aluminium | L 5000 × W 70 × H 16 mm | 11.949 lbs





 ${\bf z}$ Attention: for mounting tension lock Z 961/13 the adaptor Z 161/A is needed

Basic parts

Beam


with 2 × Z 961/13 L 455 × W 70 × H 16 mm




Z 115.11

1 × beam made of extrusion Z 110, incl. 2 × built-in tension lock Z 961/13 and 2 × adaptor Z 161/A

aluminium | L 455 × W 70 × H 16 mm | 1.506 lbs





Weitere Abmessungen:

Z 120.11 Z 125.01 | .11 Z 130.11 L 660 × B 70 × H 16 mm L 950 × B 70 × H 16 mm L 1360 × B 70 × H 16 mm 2.033 lbs 2.701 lbs 4.14 lbs

Curved beams on request


Beam extrusion


groove depth 7 mm L 5000 × W 70 × H 16 mm



Z 160.01 | .11

tension lock Z 961/13 can be mounted, groove depth 7 mm aluminium | L 5000 \times W 70 \times H 16 mm | 11.962 lbs





Beam


455 mm long with 2 × Z 961/13




Z 116.01

1 × beam made of extrusion Z 160, incl. 2 × built-in tension lock Z 961/13

aluminium | L 455 × W 70 × H 16 mm | 1.455 lbs





Weitere Abmessungen:

Z 121.01 | .11 Z 126.01 | .11 Z 131.01 | .11

L 660 × B 16 × H 70 mm L 950 × B 70 × H 16 mm L 1360 × B 70 × H 16 mm 1.982 lbs 2.65 lbs 4.253 lbs

■ Curved beams on request

Basic parts

Beam extrusion

L 5000 × W 80 × H 16 mm 5000 mm long



M 1320.01

 $2\times$ tension lock Z 961/13 can be mounted aluminium | L 5000 \times W 80 \times H 16 mm | 14.22 lbs



Beam extrusion

L 5000 × W 120 × H 16 mm 5000 mm long



M 1340.01

 $2\times$ tension lock Z 961/13 can be mounted aluminium | L 5000 \times W 120 \times H 16 mm | 19.841 lbs



Beam extrusion


groove depth 7 mm L 5000 × W 175 × H 16 mm



Z 508.01 | .11

 $2\times \text{tension}$ lock Z 961/13 can be mounted each side, groove depth 7 mm

aluminium | L 5000 × W 175 × H 16 mm | 21.936 lbs





Beam


with 4 × Z 961/13 L 455 × W 175 × H 16 mm



Z 514.01 | .11

1 × beam made of extrusion Z 508, incl. 4 × built-in tension lock Z 961/13

aluminium | L 455 \times W 175 \times H 16 mm | 2.48 lbs





Weitere Abmessungen:

Z 519.01 | .11 Z 524.01 | .11 Z 529.01 L 660 × B 175 × H 16 mm L 950 × B 175 × H 16 mm L 1360 × B 175 × H 16 mm 3.622 lbs 4.903 lbs 7.844 lbs

■ Curved beams on request

Basic parts

Beam extrusion


groove depth 7 mm L 5000 × W 175 × H 16 mm




Z 560.01 | .11

 $2\times$ tension lock Z 961/13 can be mounted each side, groove depth 7 mm

aluminium | L 5000 \times W 175 \times H 16 mm | 22.751 lbs





Beam


with 4 × Z 961/13 L 660 × W 16 × H 175 mm




Z 521.01 | .11

1 × beam made of extrusion Z 560, incl. 4 × built-in tension lock Z 961/13

aluminium | L 660 × W 16 × H 175 mm | 3.792 lbs





■ Curved beams on request

Beam extrusion

groove depth 10 mm L 5000 × W 175 × H 16 mm



Z 600.01 | .11

up to 4 tension locks Z 961/13 can be mounted each side, groove depth 10 mm $\,$

aluminium | L 5000 \times W 175 \times H 16 mm | 29.828 lbs





Beam

with 4 × Z 961/13 L 455 × W 175 × H 16 mm



Z 615.01 | .11

1 × beam made of extrusion Z 600, incl. 4 built-in tension locks Z 961/13, 455 mm long

aluminium | L 455 \times W 175 \times H 16 mm | 3.499 lbs





Corner connector


90° lock chamber 39 × 12 mm




Z 165.00

90°, incl. 2 × hex-star screw E 111, for extrusions with lock chamber 39 × 12 mm

aluminium | L 55 \times W 38.6 \times H 12 mm | 0.254 lbs





Basic parts

Corner connector


90° lock chamber 39 × 12 mm




Z 166.00

 $90^{\circ},$ incl. 2 × hex-star screw E 111, for extrusions with lock chamber $39\times12~\text{mm}$

aluminium | L 110 × W 38.6 × H 8 mm | 0.331 lbs






Internal connector


straight for S 100 / S 108




S 137.37

straight, for connecting upright extrusion S 100 with upright extrusion S 108, incl. internal connector S 905







Internal connector


straight for upright extrusion S 100



S 905.37

straight, for mounting of 2 × upright extrusion S 100, thread M10 steel | L 80 × W 10 mm | 0.077 lbs





Internal connector


straight lock chamber 21 × 12 mm




Z 967.00

straight, for extrusions with lock chamber 21 × 12 mm and hole 13 mm dia., incl. 1 × set screw Z 967/20 (M6), 2 × hex-star screw E 111/m (M6), 2 × countersunk screw M 1102/20 (M6) and 2 × washer Z 185

aluminium | L 181 × W 12 × H 21 mm | 0.282 lbs





Internal connector

straight lock chamber 39 × 12 mm




Z 167.00

straight, for beam extrusions with lock chamber 39 \times 12 mm, incl. 2 \times hex-star screws E 111 and 2 \times washer Z 185

aluminium | L 181 \times W 39 \times H 12 mm | 0.487 lbs





Basic parts


Internal connector

incl. end cap S 132 for ceiling



S 128.01 | .11

incl. 1 × end cap S 132 aluminium | L 175 × W 40 × H 40 mm | 0.516 lbs

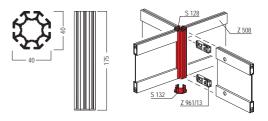

Adaptor


for tension lock Z 961/13 lock chamber 39 × 12 mm



Z 161/A.90

for mounting tension lock Z 961/13 in beam extrusions with lock chamber 39 \times 12 mm

plastic | L 76 × W 44 × H 11 mm | 0.02 lbs

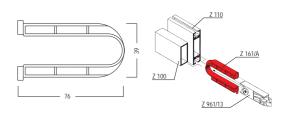

Tension lock


8 mm L 70 × W 20 × H 12 mm



Z 961/8.00

8 mm, for all beam extrusions with cross- or T-lock chamber 21 \times 12 mm

zinc die cast/steel | L 70 \times W 20 \times H 12 mm | 0.119 lbs

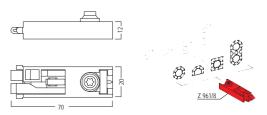

Tension lock


13 mm L 70 × W 21 × H 13 mm



Z 961/13.00

13 mm, for all beam extrusions with lock chamber 21 \times 12 mm as well as in conjunction with adaptor Z 161/A, for beam extrusions with lock chamber 39 \times 12 mm

zinc die cast/steel | L 70 × W 21 × H 13 mm | 0.115 lbs

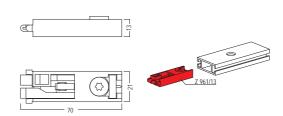

Accessories


Adjustable foot


M8 for S 100 / S 108 / M 1204



S 140.37

for upright extrusion S 100 / S 108 / M 1204, thread M8 zinc die cast/steel | L 43 \times W 43 \times H 94 mm | 0.251 lbs





Adjustable foot


M8 for upright extrusion S 201




S 240.37

for upright extrusion S 201, thread M8, incl. 1 \times set screw M 1036/20 (M4)

zinc die cast/steel | L 43 × W 43 × H 94 mm | 0.234 lbs





Adjustable foot


M8 for upright extrusion \$ 308



S 340.37

for upright extrusion S 308, thread M8, incl. 1 \times set screw M 1036/20 (M4)

zinc die cast/steel | L 43 \times W 43 \times H 94 mm | 0.216 lbs



Adjustable foot


M8 for upright extrusion \$ 500



S 540.37

for upright extrusion S 500, thread M8, incl. 1 \times set screw M 1036/20 (M4)

zinc die cast/steel | L 49 × W 43 × H 94 mm | 0.245 lbs



Adjustable foot


M8 for upright extrusion \$ 302



S 342.37

for upright extrusion S 302, thread M8, incl. 1 \times set screw E 212/Z (M4)

zinc die cast/steel | L 43 \times W 43 \times H 94 mm | 0.203 lbs



Accessories

Adjustable foot


M8 for upright extrusion \$ 303



S 343.37

for upright extrusion S 303, thread M8, incl. 1 \times set screw E 212/Z (M4)

zinc die cast/steel | L 43 \times W 43 \times H 94 mm | 0.207 lbs





Adjustable foot


for curved beams L 40 × W 43 × H 77 mm



E 250.90

to support curved beams

aluminium/steel, zinc-plated | L 40 \times W 43 \times H 77 mm | 0.256 lbs





Foot plate

for upright extrusion S 100 L 335 × W 335 × H 16 mm




S 150.21

for upright extrusion S 100, incl. 1 \times hexagon head screw S 150/Z (M10) and 1 \times washer S 4330/40

steel | L 335 \times W 335 \times H 16 mm | 3.186 lbs





Intermediate washer


M10 for base plate S 150



S 151.01

for base plate S 150, to adjust the height of base plate S 150 to the height of an adjustable foot, with thread M10 $\,$

aluminium | L 45 \times W 45 \times H 4.5 mm | 0.04 lbs



Base plate


for upright extrusions L 320 × W 120 × H 212 mm




M 1408.21

for upright extrusions M 1000 / S 108..., incl. supporting peg M 1408/2, 1 \times countersunk screw eZ5030/20 (M10) and 1 \times hex-star screw E 111/m (M6)

steel | L 320 \times W 120 \times H 212 mm | 6.186 lbs





Accessories


End cap


for extrusion S 100/S 108 L 40 × W 40 × H 17 mm



S 132.30 | .35

for upright extrusion S 100 / S 108 plastic | L 40 × W 40 × H 17 mm | 0.009 lbs






End cap

for upright extrusion S 201 L 40 × W 29 × H 17 mm



S 230.30 | .35

for upright extrusion S 201 plastic | L 40 \times W 29 \times H 17 mm | 0.007 lbs






End plate

for upright extrusion \$ 203 L 40 × W 28 × H 12 mm



S 233.39

for upright extrusion S 203 zinc die cast | L 40 \times W 28 \times H 12 mm | 0.044 lbs




End cap

for upright extrusion \$ 308 L 28 × W 28 × H 12 mm



S 330.30 | .35

for upright extrusion S 308 plastic | L 28 × W 28 × H 12 mm | 0.007 lbs



End plate

S 236.01

L 20 × W 18 × H 1 mm

for interior corner extrusion S 206 r interior corner extrusion S 206, self-adhesive, 1 mm thick aluminium plate | L 20 × W 18 × H 1 mm |






Accessories

End plate


for \$ 302 L 12 × W 35 × H 28 mm



S 332.39

for S 302

zinc die cast | L 12 \times W 35 \times H 28 mm | 0.035 lbs




End cap


for beam extrusion Z 300 L 25 × W 16 × H 14 mm



Z 970.30 | .35

for beam extrusion Z 300, 3 mm thick plastic | L 25 \times W 16 \times H 14 mm | 0.004 lbs





End cap


for beam extrusion Z 308 L 32 × W 16 × H 12 mm



Z 976.35

for beam extrusion Z 308, 2 mm thick plastic, light grey | L 32 \times W 16 \times H 12 mm | 0.004 lbs






End cap


for beam extrusion Z 310 L 37 × W 16 × H 12 mm



Z 974.30 | .35

for beam extrusion Z 310 plastic | L 37 \times W 16 \times H 12 mm | 0.004 lbs






End cap


for Z 400 / Z 402 / Z 460 L 51 × W 16 × H 12 mm



Z 975.35

for beam extrusion Z 400 / Z 402 and Z 460, 2 mm thick plastic, light grey | L 51 \times W 16 \times H 12 mm | 0.007 lbs





Accessories

End cap


for Z 100 L 43 × W 16 × H 13 mm




Z 170.35

for Z 100

plastic, light grey | L 43 \times W 16 \times H 13 mm | 0.009 lbs






End cap

for extrusion Z 110 / Z 160 L 70 × W 16 × H 12 mm



Z 175.35

for beam extrusion Z 110 / Z 160, 2 mm thick plastic, light grey | L 70 \times W 16 \times H 12 mm | 0.007 lbs



Cover extrusion

for extrusions 16 mm L 5000 × W 16 × H 3 mm



E 458.35

for system groove 4.3 mm, for extrusions 16 mm plastic, semi-hard | L 5000 \times W 16 \times H 3 mm | 0.838 lbs





Adaptor


for S 108/S 201/S 208/S 408 L 16 × W 40 × H 13 mm



S 135.35

for extrusion S 108 / S 201 / S 208 / S 408 plastic, light grey | L 16 \times W 40 \times H 13 mm | 0.004 lbs






Mounting connector

for beams 70 mm L 22 × W 40 × H 70 mm



Z 169.37

for beam extrusion Z 110 / Z 160 steel | L 22 \times W 40 \times H 70 mm | 0.099 lbs





Accessories

Mounting connector

for beams 175 mm L 22 × W 40 × H 175 mm



Z 969.37

for beams 175 mm steel | L 22 \times W 40 \times H 175 mm | 0.231 lbs





Fixing angle

incl. S 6025/20 (M6) L 34 × W 34 × H 10 mm




S 6035,37

incl. 1 × set screw S 6025/20 (M6) steel | L 34 × W 34 × H 10 mm | 0.033 lbs







Panel retainer


with drill hole 4.5 mm dia. L 24 × W 25 × H 17 mm



E 221.38


with drill hole 4.5 mm dia. steel | L 24 \times W 25 \times H 17 mm | 0.029 lbs





Ceiling panel retainer


double sided support 22 mm




E 225.37

 $22\ \mathrm{mm}$ support on both sides, can be fixed in system groove of all beam extrusions

spring steel | L 60 \times W 18 \times H 8 mm | 0.011 lbs





Ceiling panel retainer

single sided support 22 mm



E 226.37

 $22\ \mathrm{mm}$ support on one side only, can be fixed in system groove of all beam extrusions

spring steel | L 38 × W 18 × H 8 mm | 0.009 lbs





Accessories

Adaptor


for monitor 15" - 21" L 120 × W 120 × H 16 mm



E 185.01

for LCD screens 15", 17", 19", 21", incl. mounting material with 8 \times borehole 5 mm dia.

aluminium | L 120 \times W 120 \times H 16 mm | 1.23 lbs

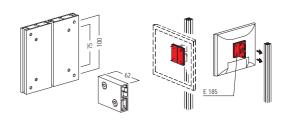

Monitor mount


angle 0°-8° for monitor 32"-52"



E 191.90

for LCD screens 32" - 52", for attachment to standard upright extrusions with system groove 4.3 mm mountable between 2 upright extrusions for 990 mm axis, monitor can be mounted straight or at an angle of 8° max., incl. 1 × beam extrusion M 1340, 973 mm long, 4 × tension lock Z 961/13, 2 × mounting bracket with universal slots and mounting hardware

aluminium/steel | L 973 × W 67 × H 879 mm | 7.937 lbs



Monitor mount


angle 0°-10° for monitor 32"-52"



E 195.90

for LCD screens 32" – 63" VESA 50/50 to 600/400, for attachment between two uprights with system groove 4.3 mm, for one sided monitor solutions, monitor can be mounted straight or at an angle of 10° max., incl. 1 × beam extrusion M 1340, 770 mm long, 4 × tension lock Z 961/13, 2 × mounting bracket with universal slots and mounting hardware

aluminium/steel | L 770 × W 53 × H 510 mm | 7.586 lbs



Supporting beam

straight L 100 × W 16 × H 25 mm




E 708.01 | .11

straight, for mounting to system groove 4.3 mm, incl.1 \times tension lock Z 961/13 and 1 \times end cap E 708/K

aluminium | L 100 \times W 16 \times H 25 mm | 0.234 lbs





→ Attention: maximum distributed dead load 35 kg


End cap


for shelf bracket E 708 L 38 × W 25 × H 16 mm



E 708/K.30 | .35

for shelf bracket E 708 plastic | L 38 \times W 25 \times H 16 mm | 0.004 lbs





Accessories

Supporting beam

straight L 150 × W 16 × H 43 mm



E 710.01 | .11

straight, for mounting to system groove 4.3 mm, incl. 1 \times tension lock Z 961/13, 2 \times anti-slipping device M 1670/K and 1 \times adaptor Z 161/A

aluminium | L 150 \times W 16 \times H 43 mm | 0.315 lbs





→ Attention: maximum distributed dead load 35 kg

End cap


for shelf bracket E 710 L 100 × W 16 × H 9 mm



E 710/K.35

for shelf bracket E 710

plastic, light grey | L 100 × W 16 × H 9 mm | 0.011 lbs





Supporting beam

straight L 200 × W 16 × H 43 mm



E 711.01 | .11

straight, for mounting to system groove 4.3 mm, incl. 1 \times tension lock Z 961/13, 2 \times anti-slipping device M 1670/K and 1 \times adaptor Z 161/A

aluminium | L 200 × W 16 × H 43 mm | 0.313 lbs





■ Attention: maximum distributed dead load 35 kg

Supporting beam

straight L 250 × W 16 × H 43 mm



E 712.01 | .11

straight, for mounting to system groove 4.3 mm, incl. 1 \times tension lock Z 961/13, 2 \times anti-slipping device M 1670/K and 1 \times adaptor Z 161/A

aluminium | L 250 × W 16 × H 43 mm | 0.342 lbs





→ Attention: maximum distributed dead load 30 kg


Shelf connector


for shelf brackets E 708-E 712 L 60 × W 20 × H 23 mm



E 720/G.01

for shelf brackets E 708 - E 712, incl. 1 × plastic set screw E 720/M8 aluminium | L 60 × W 20 × H 23 mm | 0.037 lbs





Accessories


Shelf board


variable for shelf bracket E 737



E 739.21

for variable use, for brackets E 737 aluminium, powder coated | L 316 \times W 974 \times H 30 mm | 12.959





■ Attention: only for axis measurement 990 mm


Coat hook

to slide on L 62 × W 16 × H 50 mm



E 284.01

to slide on beam extrusions B 37 \times H 16 mm aluminium | L 62 \times W 16 \times H 50 mm | 0.046 lbs






Coat hanger beam

for 990 mm axis L 975 × W 16 × H 37 mm



E 280.01 | .11

incl. 1 × built-in tension lock Z 951/13 and 1 × Z 961/13, mountable between 2 upright extrusions, for 990 mm axis aluminium | L 975 × W 16 × H 37 mm | 1.772 lbs




Drapery glider

for system groove 4.3 mm L 9 × W 9 × H 21 mm



E 240.30

for system groove 4.3 mm plastic, white | L 9 × W 9 × H 21 mm |





Doors

Door

Set DIN left/right




W 425-SET.01

 $1\times$ door ement of M 1305/W 906, for double-sided fabric/panel, universal for DIN left/right, consisting of door leaf frame, door upright frame incl. threshold plate and door roof frame, with hook tape W 840, with dead lock cylinder W 514, outer frame dimension door leaf frame: 855 \times 2021 mm, outer frame dimension door frame (top): 870 \times 450 mm

aluminium/steel | W 950 x H 2500 x D 40 mm | 41.275 lbs

Attention: Only use silicone edge 12 × 3 mm for doorleafframe!
 fabric dimension = outer frame dimension



Door set

for 40/80/120 mm W 950 × H 2500 × D 40 mm




W 575-SET.01

 $1\times$ door element made of W 906, for fabric/panel on both sides, DIN left/right, inward/outward opening, incl. doorleafframe, dooruprightframe, threshold plate and door frame (top), hook tape W 840, extrusion connector E 438 and dead lock cylinder W 514, outer frame dimensions: door leaf frame: 855 \times 2021 mm, door frame (top): 870 \times 450 mm

aluminium/steel | W 950 \times H 2500 \times D 40 mm | 40.172 lbs

7 Only use silicone edge 12 x 3 mm for doorleafframe
 7 fabric dimension = outer frame dimension



Door Mounting Set


for door W 575 integration into 40 mm



W 575-040.01

for the 20 mm protruding connection of the door element W 575 to Maxima 40, consisting of: 6 \times fixing angle W 575-040A, 6 \times swivel-in slot nut C 60-590, 12 \times countersunk screw M4 VA 1058/20

aluminium | L 20 \times W 32 \times H 60 mm | 0.28 lbs



Door Mounting Set


for door W 575 integration into 80 mm



W 575-080.01

for flush or 20 mm projecting connection of the doorelement W 575 to Maxima 80 or OCTAwall pro, consisting of: 6 × mounting bracket W 575–080A, 6 × retractable sliding block C 60 590, 12 × countersunk screw (M4) VA 1058/20

aluminium | L 40 × W 32 × H 60 mm | 0.322 lbs

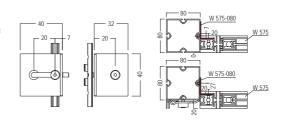

Door Mounting Set


for door W 575 integration into 120 mm



W 575-120.01

for flush or 20 mm protruding connection of the door element W 575 to Maxima 120, consisting of: $6 \times$ fixing angle W 575-120A, $6 \times$ swivel-in slot nut C 60-590, 12 × countersunk screw M4 VA 1058/20

aluminium | L 60 × W 32 × H 60 mm | 0.392 lbs

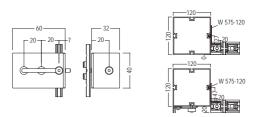

Doors

Door


Set W 950 × H 1930 × D 16 mm



W 540-SET.01 | .11

Kit DIN right, incl. 1 × mortise lock and 1 × door handle set, with dead lock cylinder W 514, without fillings, assembly dimension 950 × 1930 mm

aluminium | W 950 × H 1930 × D 16 mm | 28.539 lbs



Door


Set W 950 × H 1930 × D 16 mm



W 541-SET.01 | .11

Kit DIN left, incl. 1 \times mortise lock and 1 \times door handle set, with dead lock cylinder W 514, without fillings, for axis measurement 990 mm, assembly dimension 950 \times 1930 mm

aluminium | W 950 × H 1930 × D 16 mm | 28.455 lbs



Door set


Set right W 860 × H 1985 × D 39 mm



W 580-SET.30

Set includes: 1 × door leaf DIN right W 580/T for door frame W 580/Z, 1 × W 517/R mortise lock PZ DIN right, 1 × door handle set W 584PZ with rosette, 1 × profile double cylinder W 514 incl. 3 keys W 415/S, 1 × threshold plate W 524 for door frame W 580/Z, axis measurement 990 mm

wood/steel | W 860 × H 1985 × D 39 mm | 38.995 lbs



Door set


Set left W 860 × H 1985 × D 39 mm



W 581-SET.30

Set includes: 1 × door leaf DIN left W 581/T for door frame W 580/Z, 1 × W 517/L mortise lock PZ DIN left, 1 × door handle set W 584PZ with rosette, 1 × profile double cylinder W 514 incl. 3 keys W 415/S, 1 × threshold plate W 524 for door frame W 580/Z, axis measurement 990 mm

wood/steel | W 860 × H 1985 × D 39 mm | 38.995 lbs



Door frame

for door panel W 580 / W 581 W 950 × H 2030 × D 16 mm




W 580/Z.01

for door panel W 580 / W 581, right side, can be changed to door stop left side, incl. 1 × threshold seal W 585, assembly dimension 950×2030 mm

aluminium | W 950 × H 2030 × D 16 mm | 10.293 lbs





Doors

Threshold plate

for axis measurement 990 mm for W 510/Z / W 580/Z




W 524.37

for door frames W 510/Z and W 580/Z, for axis measurement 990 $\,$ mm

steel | L 1140 \times W 50 \times H 5 mm | 3.902 lbs





Threshold seal

roll 5 m L 5000 × W 8 mm




W 585.30

on roll, 5 m

plastic, white | L 5000 × W 8 mm | 0.22 lbs





Door handle set


skeleton key mortise lock for W 580/T / W 581/T



W 582.30

for skeleton key mortise lock, for door plate W 580/T and W 581/T, with rosette and fixing screws

plastic | L 176 \times W 151 \times H 19 mm | 0.679 lbs



Door handle set


profile cylinder lock for W 580/T / W 581/T



W 584PZ.30

for profile cylinder lock, for door plate W 580/T and W 581/T, with rosette and fixing screws

plastic | L 176 \times W 151 \times H 19 mm | 0.681 lbs



Drilling


for W 582 / W 548PZ L 52 × W 130 × H 18 mm



W 599.33

for door handle set W 582 and W 548PZ at door leaf W 580/T and 581/T, without drill (7 mm dia.)

plastic | L 52 \times W 130 \times H 18 mm | 0.123 lbs



Doors

Door handle set


with plate for W 510/T / W 511/T



W 512.30

for door panels W 510/T and W 511/T, incl. door plate and fixing screws $\,$

plastic | L 177 × W 150 × H 156 mm | 1.08 lbs



Door cylinder


for W 425 / W 575 / W 805 L 61 × W 42 × H 28 mm



W 514.38

 $1\times$ dead lock cylinder, for mounting into door W 425 / W 575 / W 805, incl. $3\times$ key W 514/S

steel | L 61 × W 42 × H 28 mm | 0.489 lbs



Fabric/Panel/Glass

Beam extrusion


panel, single sided 16 mm L 5000 × W 50 × H 16 mm




W 101.01 | .11

with supporting flange for 16 mm wall cladding on one side, tension lock Z 961/13 can be mounted

aluminium | L 5000 × W 50 × H 16 mm | 12.258 lbs





Extrusion connector

for system groove 4.3 mm L 5000 × W 10 × H 10 mm




E 438.30

for connection of 2 aluminium extrusions in parallel alignment, suitable for extrusions with a narrow mounting chamber (8.7 mm min.), for system groove 4.3 mm

plastic, semi-hard | L 5000 \times W 10 \times H 10 mm | 0.611 lbs





Internal connector

L 5000 × B 3.9 × H 24 mm 5000 mm long




W 105.01

with 6 × hole (2 mm dia.) on one edge aluminium | L 5000 × B 3.9 × H 24 mm | 2.652 lbs








Panel retainer


top L 30 × W 30 × H 22 mm



W 108.00

with clip-on mechanism for beams on top aluminium \mid L 30 × W 30 × H 22 mm \mid 0.029 lbs






Panel retainer

for concealed joint L 30 × W 24 × H 24 mm



W 109.00

for concealed joint, to be fixed to system groove of the upright from outside (90°), in conjunction with connecting spline W 105 aluminium | L 30 \times W 24 \times H 24 mm | 0.02 lbs



Fabric/Panel/Glass


Fascia hook

2 × drill hole Ø5 mm L 20 × W 16.5 × H 50 mm




E 220.38

with 2 × countersunk drill hole 5 mm dia. steel | L 20 × W 16.5 × H 50 mm | 0.051 lbs








Fascia hook


adjustable height 9 mm 2 × drill hole Ø5 mm



E 220/S.38

adjustable height 9 mm, with 2 \times countersunk drill hole 5 mm dia. steel | L 20 \times W 16.5 \times H 50 mm | 0.064 lbs





Glass panel retainer

for glass 4-8 mm L 5000 × W 16 × H 16.5 mm



E 420.30 | .33 | .35

for 4 - 8 mm panels plastic | L 5000 \times W 16 \times H 16.5 mm | 1.83 lbs





Hinges


Hinged extrusion


for S 260 - 266 L 5000 × W 35 × H 16 mm



S 250.01 | .11


in connection wirh S 260 - 266 usable as hinged extrusion aluminium | L 5000 \times W 35 \times H 16 mm | 6.922 lbs





Hinged extrusion

for S 260 - 266 L 5000 × W 16 × H 16 mm



S 252.01

in connection wirh S 260 - 266 usable as hinged extrusion aluminium | L 5000 \times W 16 \times H 16 mm | 3.814 lbs



Adjustable foot


M8 28-68 mm



S 270.37

height adjustable from 28 to 68 mm, thread M8 (50 mm long) steel | L 30 \times W 30 \times H 70 mm | 0.128 lbs





Hinged connector


M8 for S 250 / S 252




S 260.37

for 2 \times extrusion S 250 / S 252, thread M8, incl. 1 \times retaining ring S 271

steel | L 33 \times W 16 \times H 43 mm | 0.117 lbs






Threaded plug


M8 for \$ 250 / \$ 252



S 261.37

for extrusions S 250 / S 252, thread M8, incl. 1 × retaining ring S 271 steel | L 16 × W 16 × H 43 mm | 0.057 lbs





Hinges

Hinged connector

for 2 × S 250 / S 252 L 17 × W 17 × H 83 mm



S 262.37

for 2 × extrusion S 250 / S 252 steel | L 17 × W 17 × H 83 mm | 0.17 lbs





Hinged connector


for 3 × S 250 / S 252 L 31 × W 33 × H 43 mm




S 263.37

for 3 \times hinged extrusion S 250 / S 252, thread M8, incl. 1 \times retaining ring S 271

steel | L 31 × W 33 × H 43 mm | 0.174 lbs






Hinged connector


for 4 × S 250 / S 252 L 32 × W 16 × H 83 mm



S 264.37

for 4 × hinged extrusion S 250 / S 252 steel | L 32 × W 16 × H 83 mm | 0.278 lbs






Hinged connector

for 6 × S 250 / S 252 L 31 × B 33 × H 83 mm



S 266.37

for 6 × hinged extrusion S 250 / S 252 steel | L 31 × B 33 × H 83 mm | 0.384 lbs



End cap

for hinged extrusion S 250 L 35 × W 16 × H 10 mm



S 257.35

for hinged extrusion S 250 plastic | L 35 \times W 16 \times H 10 mm | 0.004 lbs





Hinges

Retaining ring

for S 260 / S 261 / S 263 L 12.5 × W 12.5 × H 1.5 mm




S 271.33

to ensure that S 260 / S 261 / S 263 fit tightly in hinged extrusions S 250 / S 252, 12.5 mm dia.

rubber | L 12.5 × W 12.5 × H 1.5 mm |





Electrical parts

Pendant light


1 illuminated side L 1000 × W 80 × H 80 mm



OL 3100.01 | .03

Set consisting of: 1 × upright L 1022-1000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 x 3.500 mm OL 466, 2 × wire rope retainer set L 222

aluminium | L 1000 × W 80 × H 80 mm | 9.052 lbs

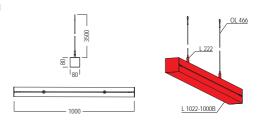

Pendant light


1 illuminated side L 2000 × W 80 × H 80 mm



OL 3200.01 | .03

Set consisting of: $1 \times \text{upright L } 1022-2000B$, $1 \times \text{power cable L } 204$, $1 \times \text{RGB remote control L } 185-2$, $2 \times \text{steel rope } 1,5 \times 3.500 \text{ mm OL } 466$, $2 \times \text{wire rope retainer set L } 222$

aluminium | L 2000 × W 80 × H 80 mm | 15.284 lbs

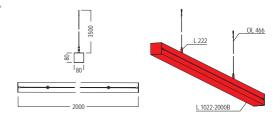

Pendant light


1 illuminated side L 3000 × W 80 × H 80 mm



OL 3300.01 | .03

Set consisting of: 1 × upright L 1022-3000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 x 3.500 mm OL 466, 2 × wire rope retainer set L 222

aluminium | L 3000 × W 80 × H 80 mm | 21.786 lbs

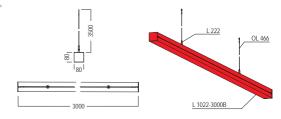

Wallwasher


LED / 28W / 230V L 812 × W 166 × H 263 mm



M 1497.31 I .33

for uniform illumination of 1000 mm width and 2500 mm height (5700 Kelvin > Cri 90, 3600 lm, 28 W, 125 lm/W), for 230 V power source, for system groove 4.3 mm, space-saving and securely packed, with 16 high-power LEDs, PSU incl. cable (500 mm to lamp and 2500 mm from power supply)

aluminium | L 812 × W 166 × H 263 mm | 4.5 lbs



Hanging lamp


LED / 56W / 230V L 818 × W 150 × H 35 mm



M 1497-H.33

for a homogenous illumination in 5700K > Cri 90, with 32 highpower LEDs, 7200 lm, 56 W, 128 lm/W, for 230 V, incl. 3.5 m wire rope with 2 × Reutlinger wire rope holders to adjust height, 2 × plastic end caps black, 1 × power supply unit incl. DC distributor, 3 m extension cable with DC connector


aluminium, matt powder-coated | L 818 \times W 150 \times H 35 mm | 5.489 lbs



Electrical parts


Power supply

for wallwasher M 1497 L 1175 × W 72 × H 35 mm



M 1497-11.90

for wallwasher M 1497, converter with 24V, 6.67A, 160W, rated voltage AC 100-240V, 50/60Hz, cable 1000 mm long plastic | L 1175 \times W 72 \times H 35 mm | 1.407 lbs



■ Attention: suitable power cord M 1497-12 is required

Cable

for wallwasher M 1497 2500 mm long



M 1497-12.90

for wallwasher M 1497, power cord CEE 7/7 - C13 plastic, black | 2500 mm long | 0.571 lbs




Extension cable

for wallwasher M 1497 3000 mm long



cable for connecting M 1497 wall-washers, with angled barrel connector at both ends $\,$

plastic, black | 3000 mm long | 0.282 lbs






PWM Dimmer

for wallwasher M 1497 L 150 × W 40 × H 20 mm



M 1497-4.90

1 × control unit and remote control for dimming of max. 5 wall-washer M 1497, DC 12-24 V, 2.4 GHz, PWM frequency 1.95 KHz plastic | L 150 × W 40 × H 20 mm | 0.227 lbs



Cable


Y-Splitter for wallwasher M 1497



M 1497-3.90

Y-cable for connecting up to 5 \times wallwasher M 1497, with barrel connector at all ends

plastic, black | 300 mm long | 0.09 lbs

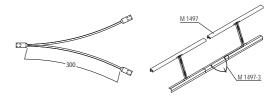

Electrical parts

Long-arm floodlight


25 W L 490 × W 232 × H 40 mm



M 1494.31 | .33

for swivel mounting in system groove, incl. adapter plate and connection cable 3 m, 25 W, 2500 lm, 4000 K, voltage input: 100-240 VAC, voltage output: 27-35 VDC, color rendering index: 80+ CRI, beam angle: 120°

aluminium | L 490 × W 232 × H 40 mm | 1.675 lbs





■ without connecting cable M 1494-xxxx


Connecting cable


for M 1494 1000 mm long



M 1494-1000.33

230V connecting cable for IEC C13 connections, one side plug, one side socket, can also be used as an extension rubber | 1000 mm long | 0.254 lbs





Weitere Abmessungen:

M 1494-2000.33 M 1494-3000.33 2000 mm lang 3000 mm lang 0.507 lbs


Long-arm floodlight


LED / 12W / 230V L 535 × W 119 × H 250 mm



M 1498.31

for voltage 100 - 230 V, for mounting in system groove 4.3 mm, 12 W / 230 V, 4000 K, 960 lm, incl. 1 × M 1481 retainer, 1 × cable 3000 mm, with integrated transformer and screwed on safety glass aluminium | L 535 × W 119 × H 250 mm | 1.354 lbs






Retainer


for long-arm floodlight M 1498 L 26 × W 35 × H 16 mm



M 1481.01

for installation in 4.3 mm system groove (extrusion top face) can be used in combination with long-arm spot light M 1480 / M 1499 aluminium | L 26 \times W 35 \times H 16 mm | 0.031 lbs





Electrical parts

Cable retaining


small for system groove 4.3 mm



E 460.35

small, for mounting of cables to system groove plastic, semi-hard | L 5000 \times W 16 \times H 20 mm | 1.609 lbs





Products


Counter

not illuminated W 902 × H 965 × D 379 mm



Q 400.31

basic set: silver-grey RAL 9006 aluminium | W 902 × H 965 × D 379 mm | 56.835 lbs



Counter


not illuminated W 910 × H 912 × D 446 mm



Q 800.31

base-set, silvergrey RAL 9006, displacement (45°) of the groove for flat welt, Measurements for prints: front: W 905 \times H 905 mm, side: W 445 \times H 905 mm

aluminium | W 910 \times H 912 \times D 446 mm | 38.581 lbs



- → without fabric/graphics
- The silicone edge has to be cut at a 45° angle.

maxima 40/80/120/160



Index

z maxima 40	61
₹ maxima 80	91
₹ maxima 120	123
₹ maxima special format	153







Index

7 TECHNICAL FEATURES	62
₹ OVERVIEW	64
₹ COMPONENTS	
¬ Basic parts	67
¬ Accessories	71
¬ Safety parts	75
7 Doors	76
¬ Fabric/Panel/Glass	78
[⊅] Hinges	83
▼ Electrical parts	85



Technical features



light weight



patented tension lock



40 mm extrusion depth



curved extrusions



panel covering 16 mm



universal door



fabric covering



accessories (e.g. wallwasher)

Display, retail, or exhibition? Everything!

Short assembly times and quick change of location. This is precisely where the strengths of **maxima 40** lie. Small, light and versatile, it is suitable for any product and can be easily transported.

Fashion today, food tomorrow.

With **maxima 40** you don't have to do without your corporate design! Our system can be dressed up over and over again. With glass, panels or fabrics. On one or both sides. Quickly adaptable thanks to practical system groove. And all this without any visible extrusions. So the focus is always on the most important thing: Your product and your brand presentation.

Show corners and edges – with curves.

Break out of the 90° world: Curved extrusions enable new styling and fresh designs. Let your creativity run free and don't hold on to straight lines. Our variable angle connectors offer additional freedom.

Our system groove. Countless possibilities.

Wallwashers, shelves, magnetic holders and much more – a variety of accessories can be inserted into our system groove. Perfectly coordinated, additional features and articles can be easily added.

Overview


Basic parts



















































































Overview

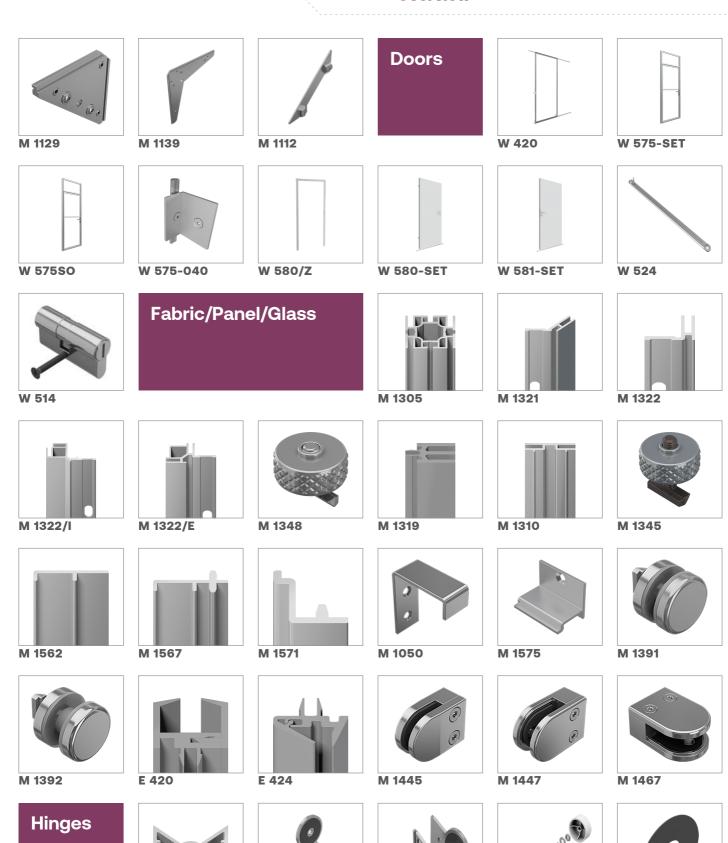

W 908

M 1541

M 1557

M 1558

M 1599

Overview



Electrical parts



OL 3100 OL 3200



200 OL 3300



M 1497

М 1497-Н























E 463

Basic parts

Square extrusion


4 system grooves L 5000 × W 40 × H 40 mm



M 1000.01

for connection on 4 sides, tension lock Z 961/8 can be mounted in 2 positions, with 4 system grooves, groove depth 7 mm aluminium | L 5000 \times W 40 \times H 40 mm | 12.747 lbs





Square extrusion


4 system grooves L 6000 × W 40 × H 40 mm



M 1001.01

for connection on 4 sides, tension lock Z 961/8 can be mounted in 2 positions, with 4 system grooves, groove depth 7 mm aluminium | L $6000 \times W$ 40 × H 40 mm | 15.366 lbs






Square extrusion

2 system grooves L 5000 × W 40 × H 40 mm




M 1002.01

for connection on 2 sides, tension lock Z 961/8 can be mounted in 2 positions, with 2 system grooves, groove depth 7 mm aluminium | L 5000 \times W 40 \times H 40 mm | 12.244 lbs




Square extrusion

2 system grooves L 6000 × W 40 × H 40 mm



M 1003.01

for connection on 2 sides, tension lock Z 961/8 can be mounted in 2 positions, with 2 system grooves, groove depth 7 mm aluminium | L 6000 \times W 40 \times H 40 mm | 15.26 lbs




Square extrusion

3 system grooves L 6000 × W 40 × H 40 mm



M 1005.01

for connection on 3 sides, tension lock Z 961/8 can be mounted in 2 positions, with 3 system grooves, groove depth 7 mm aluminium | L 6000 \times W 40 \times H 40 mm | 14.691 lbs



Basic parts

Square extrusion


2 system grooves 90° corner



M 1007.01

 $90^{\rm o}$ corner, for connection on 2 sides, tension lock Z 961/8 can be mounted in 2 positions, with 2 system grooves, groove depth 7 mm

aluminium | L 6000 × W 40 × H 40 mm | 15.816 lbs



Upright extrusion


5 system grooves L 5000 × W 40 × H 40 mm




S 380.01

tension lock Z 961/8 can be mounted in 2 positions, with 5 system grooves

aluminium | L 5000 × W 40 × H 40 mm | 13.161 lbs





Upright extrusion


8 system grooves L 6000 × W 40 × H 40 mm



S 209.01

tension lock Z 961/8 can be mounted in 2 positions, with 8 system grooves

aluminium | L 6000 \times W 40 \times H 40 mm | 17.751 lbs



Corner upright extrusion


90° corner with silicone edge groove




S 382.01

 $90^\circ,$ for connection of OCTAwall 40 frames, fabric can be mounted over the extrusion right to the edge


aluminium | L 5000 × W 40 × H 40 mm | 15.238 lbs





Angle extrusion


135° corner L 6000 × W 40 × H 50 mm



M 1009.01

135°, for connection on 2 sides, tension lock Z 961/8 can be mounted in 2 positions

aluminium | L 6000 \times W 40 \times H 50 mm | 17.236 lbs



Basic parts

Double triangular


corner L 6000 × W 40 × H 56 mm



M 1072.01

for corners, for connection on 2 sides, can also be mounted horizontally for wall bracing

aluminium | L 6000 × W 40 × H 56 mm | 10.688 lbs



Corner upright extrusion


90° corner, round L 6000 × W 120 × H 120 mm




M 260.01

for connecting extrusions with width 16, 40, 80, 120 mm, OCTAwall pro or OCTAwall 40 frames, fabric can be stretched over the extrusion

aluminium | L 6000 × W 120 × H 120 mm | 56.217 lbs





Corner connector


90° lock chamber 21 × 12 mm




Z 965B.00

90°, for extrusions with lock chamber 21 × 12 mm, incl. 2 × hex-star screw E 111 and E 111/20

zinc die cast | L 55 \times W 21 \times H 12 mm | 0.168 lbs





90° lock chamber 21 × 12 mm

Corner connector





Z 990.00

■ steep thread

90°, for extrusions with 21 × 12 mm lock chamber, incl. 2 × M10 threads for adjustable foot C 440/F, incl. 2 × hex-star screw E 111 and E 111/20

zinc die cast | L 96 × W 96 × H 12 mm | 0.309 lbs





Internal connector


straight lock chamber 21 × 12 mm




Z 967.00

straight, for extrusions with lock chamber 21 × 12 mm and hole 13 mm dia., incl. 1 × set screw Z 967/20 (M6), 2 × hex-star screw E 111/m (M6), 2 × countersunk screw M 1102/20 (M6) and 2 × washer Z 185

aluminium | L 181 × W 12 × H 21 mm | 0.282 lbs





Basic parts

Internal connector


straight, toolless lock chamber 21 × 12 mm




Z 978.90

straight, toolless, for vertical connection of upright extrusions with lock chamber of 21 \times 12 mm and holes 8 mm dia., with push button setting for assembly without tools

aluminium | L 180 \times W 21 \times H 12 mm | 0.24 lbs





Tension lock

8 mm L 70 × W 20 × H 12 mm




Z 961/8.00

8 mm, for all beam extrusions with cross- or T-lock chamber 21 \times 12 mm

zinc die cast/steel | L 70 × W 20 × H 12 mm | 0.119 lbs







Accessories


End cap


for extrusions 40 × 40 mm L 40 × W 40 × H 12 mm



M 1014.35

for all square extrusions 40 mm plastic, light grey | L 40 \times W 40 \times H 12 mm | 0.009 lbs






Adjustable foot

M8 for extrusions 40 × 40 mm



M 1016.37

for extrusions 40 \times 40 mm, thread M8 zinc die cast/steel | L 43 \times W 43 \times H 94 mm | 0.262 lbs






Adjustable foot


for uprights 40 × 40 mm L 39 × W 39 × H 34 mm



W 913.37

for extrusions M 1000 / M 1001 / M 1005 and M 1007 steel | L 39 \times W 39 \times H 34 mm | 0.146 lbs





Adjustable foot


135° corner for upright M 1009



C 441.37

for exterior corner extrusion M 1009, 135°, incl. 2 \times set screw M 1075/20 (M4)

steel, zinc plated | L 53 \times W 39 \times H 80 mm | 0.348 lbs



Base plate


for upright extrusions L 320 × W 120 × H 212 mm




M 1408.21

for upright extrusions M 1000 / S 108..., incl. supporting peg M 1408/2, 1 \times countersunk screw eZ5030/20 (M10) and 1 \times hex-star screw E 111/m (M6)

steel | L 320 × W 120 × H 212 mm | 6.186 lbs





Accessories

End plate


for 80 mm extrusions for M 260




M 261.21

for Quarter-round extrusion M 260 in connection with 80 mm extrusions, to create top and bottom horizontal fabric groove, with drilling 11 mm dia. for adjustable foot

steel | L 120 × W 120 × H 6 mm | 0.739 lbs






End plate


for 120 mm extrusions for M 260



M 271.21

for Quarter-round extrusion M 260 in connection with 120 mm extrusions, to create top and bottom horizontal fabric groove steel | L 120 \times W 120 \times H 6 mm | 0.992 lbs





Cover extrusion


for system groove 4.3 mm L 5000 × W 6 × H 1 mm



E 455.30 | .33 | .35

for system groove 4.3 mm plastic, semi-hard | L 5000 \times W 6 \times H 1 mm | 0.265 lbs





Cover extrusion

for extrusions 40 mm L 5000 × W 40 × H 5 mm




W 910.01

to clad the system groove, for frame elements with 40 mm, incl. 10 \times plastic clip E 470/C

aluminium | L 5000 \times W 40 \times H 5 mm | 2.954 lbs





◄ Recommendation: 2 × E 470/C per meter

Clip


for E 470/N / E 471/N L 10 × W 9 × H 7 mm




E 470/C.30

to put into extrusion E 470/N / E 471/N, recommendation: 4 pieces / running meter for extrusion C 722, 2 pieces / running meter for extrusion W 910

plastic | L10 × W 9 × H7 mm |





Accessories


Distance piece

with 2 × M 1142 L 40 × W 24 × H 24 mm



M 1146.01

for system groove 4.3 mm, incl. 2 × hammerhead bolt M 1142 steel | L 40 × W 24 × H 24 mm | 0.15 lbs




Internal connector

with 2 × Z 961/13 L 62 × W 16 × H 50 mm



Z 910.01

beam extrusion Z 402, to be used as shortest connection element between two extrusions, incl. 2 × built-in tension lock Z 961/13 aluminium | L 62 × W 16 × H 50 mm | 0.353 lbs





Adaptor


for monitor 15" - 21" L 120 × W 120 × H 16 mm



E 185.01

for LCD screens 15", 17", 19", 21", incl. mounting material with 8 \times borehole 5 mm dia.

aluminium | L 120 \times W 120 \times H 16 mm | 1.23 lbs

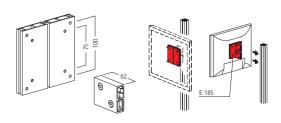

Screw eye


max. 45 kg Opening 12.3 mm dia.



E 218.41

for system groove 4.3 mm, opening 12.3 mm dia., with 1 \times hammerhead screw E 218/1 (M5) and 1 × eye nut

steel | L 28 × W 22 × H 12 mm | 0.029 lbs



■ maximum load capacity 45 kg

Screw eye


max. 35 kg Opening 20 mm dia.



M 1233.37

for system groove 4.3 mm, opening 20 mm dia., consists of 1 \times hammer head screw (M8) M 1470/Ha and 1 \times eye nut (M8) M 1401/21

steel | L 36 × W 20 × H 36 mm | 0.134 lbs



→ max. load capacity 35 kg

Accessories

Connector part


incl. 2 × M 1435/70 L 50 × W 56 × H 40 mm



M 1435.00

for system groove 4.3 mm, incl. 2 × set screw M 1435/70 (M8), 1 × M1435/20 hex bolt, 1 × M 1435/30 hex nut, 2 × M 1435/40 washer (M8)

aluminium | L 50 × W 56 × H 40 mm | 0.143 lbs



■ Attention: max. load capacity 70 kg

Connector part


max. 100 kg for rope suspension




M 1174.37

usable for rope suspension, for connection to 4.3 mm system groove, incl. 2 \times set screw M 1435/70 (M8) and 2 \times lenticular flange head screw M 1557/20 (M6), max. load capacity 100 kg

steel | L 76 × W 66 × H 8 mm | 0.562 lbs





M 1000

Attention: max. load capacity 100 kg

Fixing angle

for extrusions 40/80 mm L 40 × W 40 × H 60 mm



M 1160.37

for 40 mm and 80 mm square extrusions steel | L 40 \times W 40 \times H 60 mm | 0.11 lbs



 $\begin{tabular}{ll} \begin{tabular}{ll} \beg$

Safety parts

Reinforcement


with 2 × M 1435/70 L 67.6 × W 8 × H 67.6 mm



M 1150.37

for system groove 4.3 mm, incl. 2 × set screw M 1435/70 (M8) and 2 × round head screw with flange M 1557/20 (M6)

steel | L 67.6 × W 8 × H 67.6 mm | 0.452 lbs

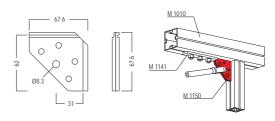

Reinforcement


with 3 × M 1435/70 L 102.6 × W 8 × H 102.6 mm



M 1129.37

for system groove 4.3 mm, incl. 3 \times set screw M 1435/70 (M8) and 2 \times round head screw with flange M 1557/20 (M6)

steel | L 102.6 × W 8 × H 102.6 mm | 0.829 lbs

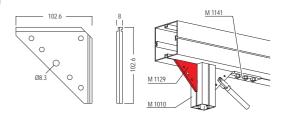

Reinforcement


with 4 × M 1435/70 L 300 × W 8 × H 300 mm




M 1139.37

for system groove 4.3 mm, incl. 4 \times set screw M 1435/70 (M8) and 4 \times round head screw with flange M 1557/20 (M6)

steel | L 300 × W 8 × H 300 mm | 4.361 lbs





Corner bracing


with 2 × M 1142 L 240 × W 160 × H 25 mm



M 1112.21

for system groove 4.3 mm, incl. 2 \times hammerhead fixing set M 1142 on both ends

steel | L 240 \times W 160 \times H 25 mm | 0.816 lbs





Doors

Sliding door

opening W 950 × H 2500 mm W 1975 × H 2500 × D 80 mm




W 420.01

 $1\times$ door element made of W 906 for fabric and panel on both sides, can be attached toolfree to the system groove of the OCTAwall 40 frame with hammer head screws, for installation in opening with clear dimensions W 950 x H 2500 mm, sliding door dimensions W 990 x H 2480 x D 40 mm

aluminium | W 1975 × H 2500 × D 80 mm | 17.855 lbs

■ fabric dimension = outer frame dimension



Door set

for 40/80/120 mm W 950 × H 2500 × D 40 mm




W 575-SET.01

 $1\times$ door element made of W 906, for fabric/panel on both sides, DIN left/right, inward/outward opening, incl. doorleafframe, dooruprightframe, threshold plate and door frame (top), hook tape W 840, extrusion connector E 438 and dead lock cylinder W 514, outer frame dimensions: door leaf frame: 855 \times 2021 mm, door frame (top): 870 \times 450 mm

aluminium/steel | W 950 \times H 2500 \times D 40 mm | 40.172 lbs





- Only use silicone edge 12 × 3 mm for doorleafframe
- fabric dimension = outer frame dimension

Door


for 40/80/120 mm 40 mm, custom size




W 575SO.01

 $1\times$ door element made of W 906, for fabric/panel on both sides, DIN left/right, inward/outward opening, incl. doorleafframe, dooruprightframe, threshold plate and door frame (top), hook tape W 840, extrusion connector E 438, without dead lock cylinder W 514, 40 mm, custom size: please specify door element width and door element height when ordering

aluminium/steel | 40 mm, custom size |





- ightharpoonup Only use silicone edge 12 × 3 mm for doorleafframe
- fabric dimension = outer frame dimension

Door Mounting Set

for door W 575 integration into 40 mm




W 575-040.01

for the 20 mm protruding connection of the door element W 575 to Maxima 40, consisting of: 6 \times fixing angle W 575-040A, 6 \times swivel-in slot nut C 60-590, 12 \times countersunk screw M4 VA 1058/20

aluminium | L 20 \times W 32 \times H 60 mm | 0.28 lbs







Door frame

for door panel W 580 / W 581 W 950 × H 2030 × D 16 mm




W 580/Z.01

for door panel W 580 / W 581, right side, can be changed to door stop left side, incl. 1 × threshold seal W 585, assembly dimension 950×2030 mm

aluminium | W 950 × H 2030 × D 16 mm | 10.293 lbs





Doors

Door set

Set right W 860 × H 1985 × D 39 mm



W 580-SET.30

Set includes: 1 × door leaf DIN right W 580/T for door frame W 580/Z, 1 × W 517/R mortise lock PZ DIN right, 1 × door handle set W 584PZ with rosette, 1 × profile double cylinder W 514 incl. 3 keys W 415/S, 1 × threshold plate W 524 for door frame W 580/Z, axis measurement 990 mm

wood/steel | W 860 \times H 1985 \times D 39 mm | 38.995 lbs



Door set

Set left W 860 × H 1985 × D 39 mm



W 581-SET.30

Set includes: 1 × door leaf DIN left W 581/T for door frame W 580/Z, 1 × W 517/L mortise lock PZ DIN left, 1 × door handle set W 584PZ with rosette, 1 × profile double cylinder W 514 incl. 3 keys W 415/S, 1 × threshold plate W 524 for door frame W 580/Z, axis measurement 990 mm

wood/steel | W 860 × H 1985 × D 39 mm | 38.995 lbs



Threshold plate

for axis measurement 990 mm for W 510/Z / W 580/Z




W 524.37

for door frames W 510/Z and W 580/Z, for axis measurement 990 $\,$ mm

steel | L 1140 \times W 50 \times H 5 mm | 3.902 lbs





Door cylinder

for W 425 / W 575 / W 805 L 61 × W 42 × H 28 mm



W 514.38

1 × dead lock cylinder, for mounting into door W 425 / W 575 / W 805, incl. 3 × key W 514/S

steel | L 61 \times W 42 \times H 28 mm | 0.489 lbs



Fabric/Panel/Glass


Tension fabric extr.


for double sided fabric L 6000 × W 40 × H 40 mm



M 1305.01

for double sided fabric (with silicone edge M 1313), with 4 grooves to fix fabric, tension lock Z 961/8 can be mounted in 2 positions aluminium | L 6000 \times W 40 \times H 40 mm | 18:153 lbs





Tension fabric extr.


45° for single sided fabric



M 1321.01

 $45^{\circ},$ for single sided fabric (with silicone edge M 1313), with 11 \times hole 8.9 \times 18 mm, for mounting in system groove: for 40 mm square extrusions use fixing set M 1348, for 80 mm and 120 mm square extrusions use fixing clip M 1339 and fixing set M 1348

aluminium | L 6000 × W 43 × H 20 mm | 5.053 lbs

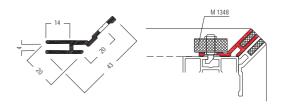

Tension fabric extr.


for single sided fabric L 6000 × W 28.5 × H 20 mm




M 1322.01

for single sided fabric (with silicone edge M 1313), with 11 × hole 8.9 × 18 mm, for mounting in system groove: for 40 mm square extrusions use fixing set M 1348, for 80 mm and 120 mm square extrusions use fixing clip M 1339

aluminium | L 6000 \times W 28.5 \times H 20 mm | 4.471 lbs





Tension fabric extr.


90° internal corner for single sided fabric



M 1322/I.01

 90° internal corner, for single sided fabric (with silicone edge M 1313), with 11 × hole 8.9×18 mm, for mounting in system groove: for 40 mm square extrusions use fixing set M 1348, for 80 mm and 120 mm square extrusions use fixing clip M 1339

aluminium | L 6000 × W 56.3 × H 27.8 mm | 10.172 lbs

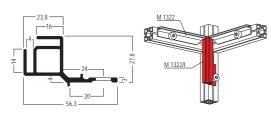


Tension fabric extr.


90° outer corner for single sided fabric



M 1322/E.01

90° outer corner, for single sided fabric (with silicone edge M 1313), with 11 × hole 8.9 × 18 mm, for mounting in system groove: for 40 mm square extrusions use fixing set M 1348, for 80 mm and 120 mm square extrusions use fixing clip M 1339 and fixing set M 1348 aluminium | L 6000 × W 48.5 × H 27.8 mm | 9.753 lbs






Fabric/Panel/Glass

Fixing set


for M 1321 / M 1322/E/I L 21 × W 24 × H 24 mm




M 1348.37

two-parts, only for mounting of extrusion M 1321 / M 1322 / M 1322/E / M 1322/I to system groove 4.3 mm, with 1 \times galvanized hammerhead screw M 1348/Ha

steel | L 21 × W 24 × H 24 mm | 0.084 lbs





Tension fabric extr.

for system groove 4.3 mm for single sided fabric



M 1319.35

for single sided fabric (with silicone edge M 1313), for system groove $4.3~\mathrm{mm}$, with $2~\mathrm{fabric}$ grooves

plastic | L 6000 × W 15 × H 20 mm | 3.219 lbs






Tension fabric extr.


for double sided fabric L 6000 × W 40 × H 10 mm



M 1310.01

for double sided fabric (with silicone edge M 1313), for mounting in system groove with fixing set M 1345, with 13 × hole 18 mm dia. aluminium | L 6000 × W 40 × H 10 mm | 5.939 lbs





■ in connection with M 1345

Fixing set


for M 1310/M 1325/M 1330 L 28 × W 24 × H 24 mm




M 1345.37

only for fixing of extrusions M 1310 / M 1325 / M 1330 to system groove 4.3 mm, with 1 \times hammerhead screw M 1345/Ha "gunmetal finish"

steel | L 28 \times W 24 \times H 24 mm | 0.086 lbs





Wall panel retainer


top for extrusions 40 × 40 mm



M 1562.00

top, for double sided panel clad wall, in conjunction with 40 mm square extrusions

aluminium | L 5000 \times W 38 \times H 6 mm | 3.02 lbs

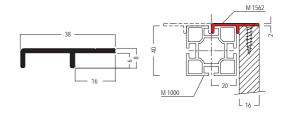

■ countersunk hole for screw required

Fabric/Panel/Glass

Wall panel retainer


centre for extrusions 40 × 40 mm



M 1567.00


centre, for double sided panel clad wall, in conjunction with 40 $\,$ mm square extrusions

aluminium | L 5000 × W 38 × H 14 mm | 4.497 lbs

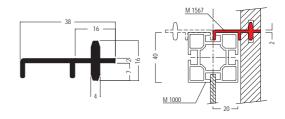

Wall panel retainer

bottom for extrusions 40 × 40 mm




M 1571.00

bottom, for single or double sided panel clad wall, in conjunction with 40 mm square extrusions

aluminium | L 5000 × W 23 × H 24 mm | 3.569 lbs





Fascia hook


for extrusions 40 × 40 mm L 40.5 × B 20 × H 50 mm




M 1050.38

for extrusions 40 \times 40 mm, with 2 \times countersunk drill hole 5 mm dia.

steel | L 40.5 \times B 20 \times H 50 mm | 0.066 lbs






Panel retainer


for system groove 4.3 mm for 40 mm extrusions



M 1575.00

to be fixed to 40 mm extrusions, for system groove 4.3 mm aluminium | L 50 \times W 28 \times H 28 mm | 0.033 lbs





Panel retainer

for glass 5-6 mm for panel max. 10 mm




M 1391.90

for 5 - 6 mm glass or max. 10 mm panels, assembly without tools, incl. rubber inserts and 1 \times hammerhead screw M 1470/Ha (M8) steel, zinc-plated/stainless steel | L 30 \times W 30 \times H 8 mm | 0.168 lbs







Fabric/Panel/Glass


Panel retainer

for glass 8-10 mm for panel max. 14 mm



M 1392.90

for 8 - 10 mm glass or max. 14 mm panels, assembly without tools, incl. rubber inserts and 1 \times hammerhead screw M 1475/Ha (M8) steel, zinc-plated/stainless steel | L 30 \times W 30 \times H 8 mm | 0.172 $^{''}$

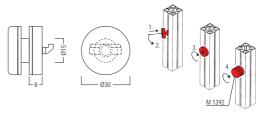

Glass panel retainer

for glass 4-8 mm L 5000 × W 16 × H 16.5 mm



E 420.30 | .33 | .35

for 4 - 8 mm panels plastic | L 5000 × W 16 × H 16.5 mm | 1.83 lbs





Glass panel retainer

for glass 4-6 mm L 5000 × W 16 × H 10 mm



E 424.30 | .35

for 4 - 6 mm panels plastic | L 5000 \times W 16 \times H 10 mm | 0.992 lbs





Glass retainer


for glass 8 mm L 38 × W 23 × H 52 mm





M 1445.39

for glass thickness 8 mm, for mounting to system groove 4.3 mm, with 1 \times hammerhead screw M 1470/Ha (M8)

zinc die cast | L 38 × W 23 × H 52 mm | 0.353 lbs







Glass retainer


for glass 10 mm L 45 × W 27.5 × H 63 mm





M 1447.39

for glass thickness 10 mm, for mounting to system groove 4.3 mm, with 1 \times hammerhead screw M 1470/Ha (M8)

zinc die cast | L 45 \times W 27.5 \times H 63 mm | 0.597 lbs







Fabric/Panel/Glass

Glass retainer


for glass 12 mm L 45 × W 27.5 × H 63 mm



M 1467.39

for mounting to system groove 4.3 mm, for glass thickness 12 mm, with 1 × hammerhead screw M 1470/Ha (M8)

zinc die cast | L 45 × W 27.5 × H 63 mm | 0.584 lbs

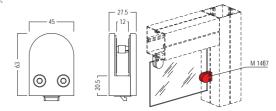

Hinges


Hinged extrusion

90°-180° angle L 5000 × W 40 × H 40 mm



W 908.01

two parts, for stepless angle (90°–180°) aluminium | L 5000 × W 40 × H 40 mm | 12.35 lbs





Hinged end plate


for extrusions 40 × 40 mm L 42 × W 42 × H 130 mm




M 1541.21

for all square extrusions 40 mm, incl. 1 × cylinder screw M 1296/20 (M6),1 × anti-slipping device M 1599 and bolt M 1296/1 $^{\circ}$

steel | L 42 × W 42 × H 130 mm | 0.714 lbs







Hinged flange plate


for 49 dia. L 75 × W 4 × H 49 mm




M 1557.21

for all hinged end plates and hinged flange plates with 49 mm dia, for mounting to system groove 4.3 mm, incl.1 × round head screw with flange M 1557/20 (M6), 2 × set screw M 1435/20 (M8 and 1 × anti-slipping device M 1599

steel | L 75 × W 4 × H 49 mm | 0.249 lbs





Covering


for 49 mm dia. L 50 × W 21 × H 50 mm




M 1558.35

1 pair, for all hinged end plates and hinged flange plates with 49 mm dia., incl. treaded steel rod M8 $\,$

plastic, light grey | L 50 \times W 21 \times H 50 mm | 0.201 lbs





Anti-slipping device

for 49 mm dia. L 42 × W 0.6 × H 42 mm




M 1599.33

self-adhesive paper, for hinged end plate M 1541 and hinged flange plate M 1557, for all hinged end plates and hinged flange plates with 49 mm dia.

paper, flocked | L 42 \times W 0.6 \times H 42 mm |





Hinges

Hinged set


for system groove 4.3 mm L 24 × W 24 × H 74 mm



M 1457.39

for mounting to system groove 4.3 mm, incl. 2 \times hammerhead bolt M 1142

steel | L 24 × W 24 × H 74 mm | 0.522 lbs





Electrical parts

Pendant light


1 illuminated side L 1000 × W 80 × H 80 mm



OL 3100.01 | .03

Set consisting of: 1 × upright L 1022-1000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 x 3.500 mm OL 466, 2 × wire rope retainer set L 222

aluminium | L 1000 × W 80 × H 80 mm | 9.052 lbs

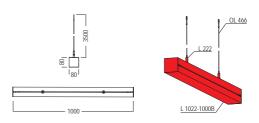

Pendant light


1 illuminated side L 2000 × W 80 × H 80 mm



OL 3200.01 | .03

Set consisting of: $1 \times \text{upright L } 1022-2000B$, $1 \times \text{power cable L } 204$, $1 \times \text{RGB remote control L } 185-2$, $2 \times \text{steel rope } 1,5 \times 3.500 \text{ mm OL } 466$, $2 \times \text{wire rope retainer set L } 222$

aluminium | L 2000 × W 80 × H 80 mm | 15.284 lbs

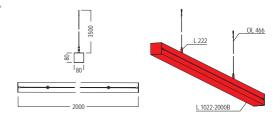

Pendant light


1 illuminated side L 3000 × W 80 × H 80 mm



OL 3300.01 | .03

Set consisting of: 1 × upright L 1022-3000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 x 3.500 mm OL 466, 2 × wire rope retainer set L 222

aluminium | L 3000 × W 80 × H 80 mm | 21.786 lbs

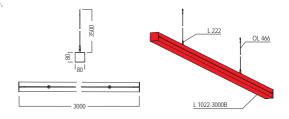

Wallwasher


LED / 28W / 230V L 812 × W 166 × H 263 mm



M 1497.31 | .33

for uniform illumination of 1000 mm width and 2500 mm height (5700 Kelvin > Cri 90, 3600 lm, 28 W, 125 lm/W), for 230 V power source, for system groove 4.3 mm, space-saving and securely packed, with 16 high-power LEDs, PSU incl. cable (500 mm to lamp and 2500 mm from power supply)

aluminium | L 812 × W 166 × H 263 mm | 4.5 lbs



Hanging lamp


LED / 56W / 230V L 818 × W 150 × H 35 mm



M 1497-H.33

for a homogenous illumination in 5700K > Cri 90, with 32 highpower LEDs, 7200 lm, 56 W, 128 lm/W, for 230 V, incl. 3.5 m wire rope with 2 × Reutlinger wire rope holders to adjust height, 2 × plastic end caps black, 1 × power supply unit incl. DC distributor, 3 m extension cable with DC connector

aluminium, matt powder-coated | L 818 \times W 150 \times H 35 mm | 5.489 lbs




Electrical parts

Power supply

for wallwasher M 1497 L 1175 × W 72 × H 35 mm

M 1497-11.90

for wallwasher M 1497, converter with 24V, 6.67A, 160W, rated voltage AC 100-240V, 50/60Hz, cable 1000 mm long plastic | L 1175 \times W 72 \times H 35 mm | 1.407 lbs



■ Attention: suitable power cord M 1497-12 is required

Cable

for wallwasher M 1497 2500 mm long



M 1497-12.90

for wallwasher M 1497, power cord CEE 7/7 - C13 plastic, black | 2500 mm long | 0.571 lbs




Extension cable

for wallwasher M 1497 3000 mm long



cable for connecting M 1497 wall-washers, with angled barrel connector at both ends $\,$

plastic, black | 3000 mm long | 0.282 lbs






PWM Dimmer

for wallwasher M 1497 L 150 × W 40 × H 20 mm



M 1497-4.90

1 × control unit and remote control for dimming of max. 5 wall-washer M 1497, DC 12-24 V, 2.4 GHz, PWM frequency 1.95 KHz plastic | L 150 × W 40 × H 20 mm | 0.227 lbs



Cable


Y-Splitter for wallwasher M 1497



M 1497-3.90

Y-cable for connecting up to 5 \times wallwasher M 1497, with barrel connector at all ends

plastic, black | 300 mm long | 0.09 lbs

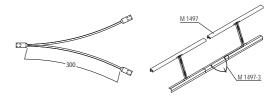

Electrical parts

Long-arm floodlight


25 W L 490 × W 232 × H 40 mm



M 1494.31 | .33

for swivel mounting in system groove, incl. adapter plate and connection cable 3 m, 25 W, 2500 lm, 4000 K, voltage input: 100-240 VAC, voltage output: 27-35 VDC, color rendering index: 80+ CRI, beam angle: 120°

aluminium | L 490 × W 232 × H 40 mm | 1.675 lbs





■ without connecting cable M 1494-xxxx


Connecting cable

for M 1494 1000 mm long



M 1494-1000.33

230V connecting cable for IEC C13 connections, one side plug, one side socket, can also be used as an extension rubber | 1000 mm long | 0.254 lbs





Weitere Abmessungen:

M 1494-2000.33 M 1494-3000.33 2000 mm lang 3000 mm lang 0.507 lbs 0.772 lbs


Long-arm floodlight


LED / 12W / 230V L 535 × W 119 × H 250 mm



M 1498.31

for voltage 100 - 230 V, for mounting in system groove 4.3 mm, 12 W / 230 V, 4000 K, 960 lm, incl. 1 × M 1481 retainer, 1 × cable 3000 mm, with integrated transformer and screwed on safety glass aluminium | L 535 × W 119 × H 250 mm | 1.354 lbs






Retainer


for long-arm floodlight M 1498 L 26 × W 35 × H 16 mm



M 1481.01

for installation in 4.3 mm system groove (extrusion top face) can be used in combination with long-arm spot light M 1480 / M 1499 aluminium | L 26 \times W 35 \times H 16 mm | 0.031 lbs





Electrical parts

Cable retaining


small for system groove 4.3 mm



E 460.35

small, for mounting of cables to system groove plastic, semi-hard | L 5000 \times W 16 \times H 20 mm | 1.609 lbs






Cable retaining


big for system groove 4.3 mm



E 463.35

big, for system groove 4.3 mm plastic, semi-hard | L 5000 \times W 30 \times H 30 mm | 2.634 lbs








Index

7 TECHNICAL FEATURES	92
₹ OVERVIEW	94
₹ COMPONENTS	
¬ Basic parts	97
Accessories Acces	102
¬ Safety parts	108
л Doors	110
¬ Fabric/Panel/Glass	112
[¬] Hinges	116
⊼ Electrical parts	118

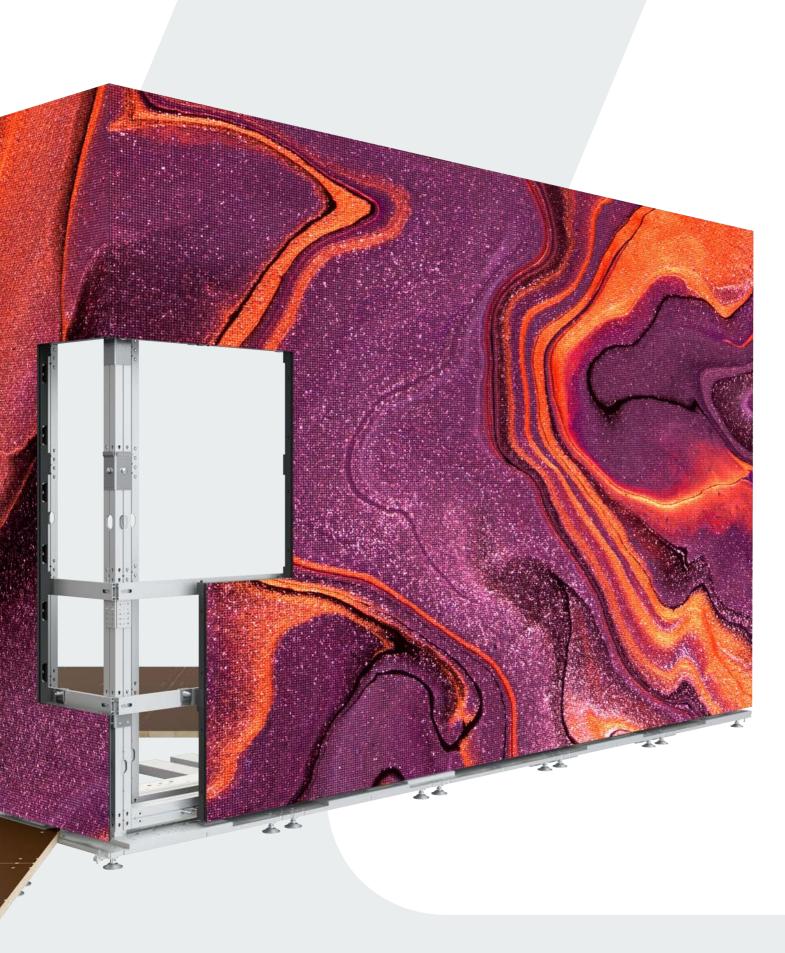

Technical features



up to 6 m height



patented tension lock



80 mm extrusion depth



fabric covering



panel covering 16 mm



universal door

Perfect for exhibitions? Yes. But not only!


Versatile. Stable. Adaptable. Everything you need at an exhibition. Reusable and light due to the aluminium material. Perfectly combinable with other **octanorm** systems. A system with added value that is suitable for exhibitions of any kind. With **maxima 80** you stay flexible.

From floor to ceiling.

Visible or not, **maxima 80** extrusions always achieve top performance. Besides cladding with panels or fabrics, the main advantage of the system is its compatibility with other systems such as **octalumina 80** light frames or octarig ceiling constructions.

Videos instead of pictures: LED Panels.

It is hard to imagine exhibition booths without LED panels. But this does not require a complicated substructure. The LED panels are simply hooked into the keyholes of the **octauniversal** upright using our special brackets. This way you can always integrate the latest panels from your manufacturer of choice. Highest quality. Highest safety. Without restrictions.




LED panels

Overview

Basic parts


















































































Overview

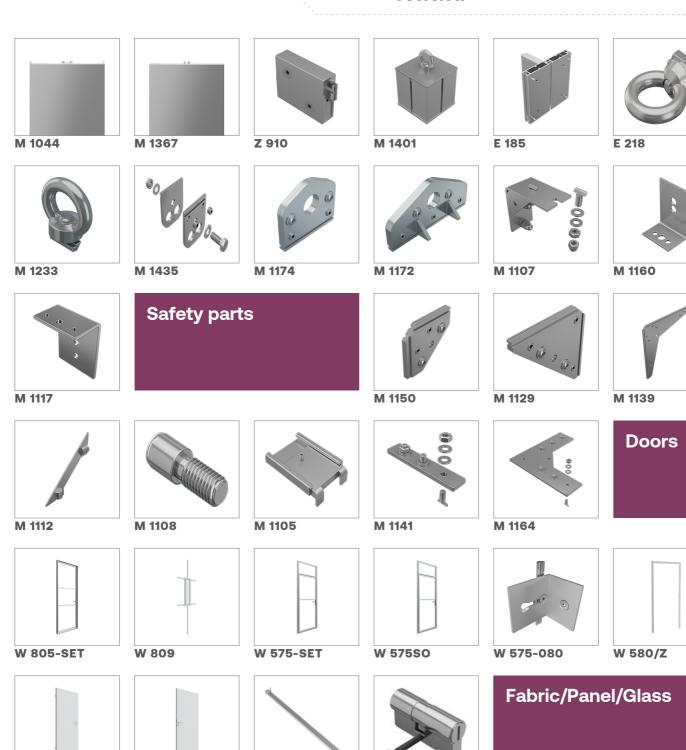



W 580-SET



W 581-SET



W 524




W 514





Overview

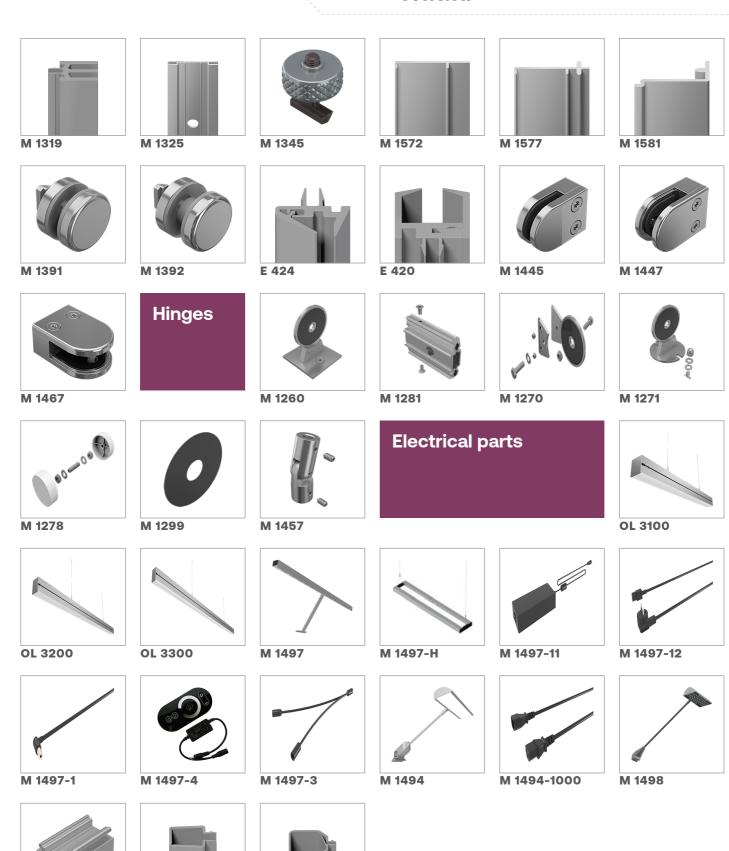

M 1481

E 460

E 463

Basic parts

Square extrusion


4 system grooves L 5000 × W 80 × H 80 mm




M 1020.01

adaptors with tension lock M 1101 / M 1103, adaptors with safety tension lock M 1114 / M 1116 and adaptor for hinged end plates M 1281 can be mounted, with 4 system grooves

aluminium | L 5000 × W 80 × H 80 mm | 25.384 lbs





Square extrusion


L 6000 × W 80 × H 80 mm 6000 mm long




M 1021.01

adaptors with tension lock M 1101 / M 1103, adaptors with safety tension lock M 1114 / M 1116 and adaptor for hinged end plates M 1281 can be mounted


aluminium | L 6000 × W 80 × H 80 mm | 28.408 lbs






Square extrusion


L 6000 × W 80 × H 80 mm 6000 mm long



M 1019.01


tension lock Z 961/8 can be mounted aluminium | L 6000 \times W 80 \times H 80 mm | 39.242 lbs





Square extrusion


with cover extrusion L 6000 × W 80 × H 80 mm




M 1023.01

with cover extrusion, incl. 8 × reinforcement extrusion M 1130, each 65 mm long and 1 × set screw M 1130/20 (M5), adaptors with tension lock M 1101 / M 1103 and adaptors with safety tension lock M 1114 / M 1116 can be mounted

aluminium | L 6000 \times W 80 \times H 80 mm | 38.003 lbs





Square extrusion


for lighttracks L 6000 × W 80 × H 80 mm




M 1059.01

lighttrack mounting extrusion, adaptor with tension lock M $\rm 1151$ can be mounted

aluminium | L 6000 \times W 80 \times H 80 mm | 35.097 lbs





▼ tension lock can be installed vertically or horizontally

Basic parts


Cover extrusion


for extrusion M 1059 L 5000 × W 30 × H 40 mm



M 1155.01

can be used only with lighttrack mounting extrusion M 1059 aluminium | L 5000 × W 30 × H 40 mm | 7.619 lbs





Angle extrusion


135° L 5000 × W 77 × H 80 mm



M 1070.01

135°, 3 system grooves aluminium | L 5000 × W 77 × H 80 mm | 18.464 lbs






Corner upright extrusion | M 260.01


90° corner, round L 6000 × W 120 × H 120 mm



for connecting extrusions with width 16, 40, 80, 120 mm, OCTAwall pro or OCTAwall 40 frames, fabric can be stretched over the extrusion

aluminium | L 6000 × W 120 × H 120 mm | 56.217 lbs






Round extrusion

8 system grooves L 5000 × W 80 × H 80 mm



M 1222.01

with 8 system grooves, 80 mm dia. aluminium | L 5000 × W 80 × H 80 mm | 24.184 lbs



Corner connector


90° for extrusions 80 × 80 mm




M 1115.00

 90° , for all closed square extrusions 80 mm, incl. $6 \times$ countersunk screw M 1611/20 (M5)

aluminium | L 160 × W 19.5 × D 160 mm | 0.864 lbs





Basic parts

Spigot tube


square L 80 × W 80 × H 404 mm




M 1424.00

for extension of upright extrusions, for extrusions M 1020 / M1021 / M 1017

aluminium | L 80 × W 80 × H 404 mm | 1.964 lbs






Spigot tube


round L 80 × W 80 × H 404 mm



M 1414.00

for extension of upright extrusions, for extrusions 80 mm dia. aluminium \mid L 80 × W 80 × H 404 mm \mid 1.931 lbs





Internal connector


straight for extrusions 80 mm



M 1121.00

straight, for all square and round extrusions 80 mm with a length up to 999 mm, for vertical and horizontal use, incl. 8 \times countersunk screw M 1100/20 (M5)

aluminium | L 23 × W 57 × H 320 mm | 0.922 lbs



Internal connector


straight L 480 × W 23 × H 57 mm



M 1123.00

straight, for all square and round extrusions 80 mm with a length from 1000 – 3000 mm, for vertical and horizontal use, incl. 8 \times countersunk screw M 1100/20

aluminium | L 480 × W 23 × H 57 mm | 1.287 lbs



Internal connector


straight L 38 × W 60 × H 480 mm




M 1183.00

straight, for lighttrack mounting extrusions M 1059 with a length from 1000 – 3000 mm, incl. 4 \times countersunk screw M 1611/20 (M5)

aluminium | L 38 \times W 60 \times H 480 mm | 1.393 lbs





Basic parts

Adaptor


with Z 961/13 for extrusions 80 mm




M 1101.00

for all square and round extrusions 80 mm, incl. 1 \times tension lock Z 961/13, 1 \times collar guide M 1102/2 and 2 \times countersunk screw M 1100/20 (M5)

aluminium | L 80 × W 19 × H 57 mm | 0.317 lbs





Adaptor


with 2 × Z 961/13 for extrusions 80 mm




M 1103.00

for open square extrusions 80 mm, incl. 2 × tension lock Z 961/13, 2 × collar guide M 1102/2 and 2 × countersunk screw M 1100/20 (M5)

aluminium | $L80 \times W57 \times H57 \text{ mm}$ | 0.611 lbs






Adaptor

with 2 × Z 961/13 for extrusion M 1059



M 1151.00

for lighttrack mounting extrusion M 1059, incl. 2 × tension lock Z 961/13, 2 × bush M 1151/2 and 2 × cylinder screw M 1151/20 (M6) aluminium | L 108 × W 60 × H 38 mm | 0.891 lbs



■ tension lock can be installed vertically or horizontally

Tension lock


8 mm L 70 × W 20 × H 12 mm





Z 961/8.00

8 mm, for all beam extrusions with cross- or T-lock chamber 21 \times 12 mm

zinc die cast/steel | L 70 \times W 20 \times H 12 mm | 0.119 lbs







Tension lock

13 mm L 70 × W 21 × H 13 mm




Z 961/13.00

13 mm, for all beam extrusions with lock chamber 21 \times 12 mm as well as in conjunction with adaptor Z 161/A, for beam extrusions with lock chamber 39 \times 12 mm

zinc die cast/steel | L 70 × W 21 × H 13 mm | 0.115 lbs







Basic parts

Adaptor


with Z 961/13 for extrusions 80 mm



M 1291.03

for round extrusions 80 mm dia, incl. 1 × tension lock Z 961/13, 1 × collar guide M t102/2 and 2 × countersunk screw M 1611/20

aluminium | L 80 × W 19,5 × H 57 mm | 0.317 lbs

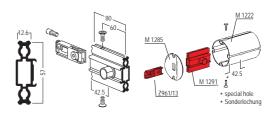

Attention: has to be used in combination with M 1285

Adaptor


with M 1161/R for extrusions 80 mm



M 1114.00

for all square and round extrusions 80 mm, incl. 1 \times safety tension lock M 1161/R, 1 \times collar guide M 1102/2 and 4 \times countersunk screw M 1611/20 (M5)

aluminium | L $46 \times W 12 \times H 39 \text{ mm}$ | 0.505 lbs



Adaptor


with M 1161/L for extrusions 80 mm



M 1116.00

for all square and round extrusions 80 mm, incl. 1 \times safety tension lock M 1161/L, 1 \times collar guide M 1102/2 and 4 \times countersunk screw M 1611/20

aluminium | L 46 \times W 12 \times H 39 mm | 0.505 lbs




Safety tension lock


left lock chamber 39 × 12 mm



M 1161/L.90

left, for extrusions with lock chamber 39 \times 12 mm plastic/steel | L 86.5 \times W 38.5 \times H 11,5 mm | 0.194 lbs






Safety tension lock


right lock chamber 39 × 12 mm



M 1161/R.90

right, for extrusions with lock chamber 39 \times 12 mm plastic/steel | L 86.5 \times W 38.5 \times H 11,5 mm | 0.194 lbs






Accessories

Connecting extrusion

5 system grooves L 5000 × W 80 × H 10 mm



M 1063.01



Fixing set


for connector part M 1079 L 24 × W 20 × H 8 mm




M 1089.37

for mounting of connector part M 1079 in front of square extrusions 80 mm $\,$

steel | L 24 × W 20 × H 8 mm | 0.06 lbs





Adjustable foot


square for extrusions 80 × 80 mm




M 1038D.37

for square extrusions 80 mm, thread M10, incl. $2\times set\ screw\ M\ 1075/20\ (M4)$

steel | L 82 \times W 82 \times H 74 mm | 0.683 lbs





Adjustable foot

135° for angle extrusion M 1070




M 1096.37

135°, for exterior corner extrusion M 1070, thread M10, incl. 1 \times set screw M 1075/20 (M4)

steel | L 92 × W 78.6 × H 74 mm | 0.58 lbs





Adjustable foot


round for extrusions 80 mm dia.




M 1234.37

for all round extrusions 80 mm dia., thread M10, incl. 2 \times set screw M 1075/20 (M4)

steel | L 82 \times W 82 \times H 74 mm | 0.593 lbs





Accessories

Base plate


for extrusions 80 mm L 300 × W 300 × H 108 mm




M 1406.21

for all square and round extrusions 80 mm, incl. adaptor M 1406/2, 2 \times countersunk screw M 1406/20 (M8) and 4 \times countersunk screw M 1611/20 (M5)

steel | L 300 × W 300 × H 108 mm | 10.146 lbs





End cap


for extrusions 80 × 80 mm L 80 × W 80 × H 3 mm




M 1034.35

for extrusions 80 \times 80 mm, for square extrusions M 1018 /M 1020 and lighttrack mounting extrusion M 1059

plastic, light grey | L 80 \times W 80 \times H 3 mm | 0.046 lbs






End plate


for extrusions 80 × 80 mm L 80 × W 80 × H 3 mm



M 1035.21

for square extrusions M 1018 / M 1020 and lighttrack mounting extrusion M 1059, incl. 2 \times set screw M 1075/20 (M4) steel | L 80 \times W 80 \times H 3 mm | 0.351 lbs





End plate


135° for corner extrusion M 1070




M 1095.21

135°, for exterior corner extrusion M 1070, incl. 2 \times set screw M 1075/20 (M4)

steel | L 90 \times W 78 \times H 3 mm | 0.223 lbs





End plate


for 80 mm extrusions for M 260




M 261.21

for Quarter-round extrusion M 260 in connection with 80 mm extrusions, to create top and bottom horizontal fabric groove, with drilling 11 mm dia. for adjustable foot

steel | L 120 × W 120 × H 6 mm | 0.739 lbs





Accessories


End plate


for 120 mm extrusions for M 260



M 271.21

for Quarter-round extrusion M 260 in connection with 120 mm extrusions, to create top and bottom horizontal fabric groove steel | L 120 \times W 120 \times H 6 mm | 0.992 lbs





End plate


round, 80 mm dia. L 82 × W 82 × H 3 mm



M 1235.21

for all round extrusions 80 mm dia, incl. 2 \times set screw M 1075/20 (M4)

steel | L 82 × W 82 × H 3 mm | 0.284 lbs






Distance piece


with 2 × M 1142 L 40 × W 24 × H 24 mm



M 1146.01

for system groove 4.3 mm, incl. 2 × hammerhead bolt M 1142 steel | L 40 × W 24 × H 24 mm | 0.15 lbs





Cover extrusion

for extrusions 80 mm L 5000 × W 80 × H 5 mm



M 1044.01

for all 80 mm extrusions with straight connection face, to cover the system groove, incl. 10 \times plastic clip E 470/C (2 pcs/rm recommended)

aluminium | L 5000 \times W 80 \times H 5 mm | 4.718 lbs



Cover extrusion

for extrusions 80 mm L 5000 × W 81 × H 2 mm




M 1367.01

can be powder-coated or film laminated, with slide-on technique for all extrusions $80\ \mathrm{mm}$

aluminium | L 5000 × W 81 × H 2 mm | 4.674 lbs





Accessories


Internal connector


with 2 × Z 961/13 L 62 × W 16 × H 50 mm



Z 910.01

beam extrusion Z 402, to be used as shortest connection element between two extrusions, incl. 2 \times built-in tension lock Z 961/13 aluminium | $L62 \times W16 \times H50 \text{ mm}$ | 0.353 lbs






Corner knot


for cable suspension L 80 × W 80 × H 124 mm



M 1401.01

for cable suspension, with 1 \times eye bolt for cable suspension and 4 × slot for secure tension lock M 1161/L and M 1161/R aluminium | L 80 × W 80 × H 124 mm | 1.861 lbs





Adaptor


for monitor 15" - 21" L 120 × W 120 × H 16 mm



E 185.01

for LCD screens 15", 17", 19", 21", incl. mounting material with 8 \times borehole 5 mm dia.

aluminium | L 120 \times W 120 \times H 16 mm | 1.23 lbs

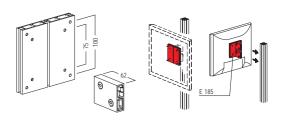

Screw eye


max. 45 kg Opening 12.3 mm dia.



E 218.41

for system groove 4.3 mm, opening 12.3 mm dia., with 1 \times hammerhead screw E 218/1 (M5) and 1 × eye nut

steel | L 28 × W 22 × H 12 mm | 0.029 lbs



■ maximum load capacity 45 kg

Screw eye


max. 35 kg Opening 20 mm dia.



M 1233.37

for system groove 4.3 mm, opening 20 mm dia., consists of 1 \times hammer head screw (M8) M 1470/Ha and 1 \times eye nut (M8) M 1401/21

steel | L 36 × W 20 × H 36 mm | 0.134 lbs



■ max. load capacity 35 kg

Accessories

Connector part


incl. 2 × M 1435/70 L 50 × W 56 × H 40 mm



M 1435.00

for system groove 4.3 mm, incl. 2 × set screw M 1435/70 (M8), 1 × M1435/20 hex bolt, 1 × M 1435/30 hex nut, 2 × M 1435/40 washer (M8)

aluminium | L 50 \times W 56 \times H 40 mm | 0.143 lbs



■ Attention: max. load capacity 70 kg

Connector part


max. 100 kg for rope suspension




M 1174.37

usable for rope suspension, for connection to 4.3 mm system groove, incl. 2 \times set screw M 1435/70 (M8) and 2 \times lenticular flange head screw M 1557/20 (M6), max. load capacity 100 kg

steel | L 76 × W 66 × H 8 mm | 0.562 lbs





■ Attention: max. load capacity 100 kg

Connector part


max. 150 kg for rope suspension




M 1172.37

usable for rope suspension, for connection to 4.3 mm system groove, incl. 3 \times set screw M 1435/70 (M8) and 2 \times lenticular flange head screw M 1557/20 (M6), max. load capacity 150 kg

steel | L 136 × W 66 × H 50 mm | 1.182 lbs





■ Attention: max. load capacity 150 kg


Fixing angle


for cable fixing L 110 × W 60 × H 110 mm



M 1107.21

for cable fixing, incl. 4 × hammerhead screw M 812 steel | L 110 × W 60 × H 110 mm | 1.759 lbs






Fixing angle

for extrusions 40/80 mm L 40 × W 40 × H 60 mm



M 1160.37

for 40 mm and 80 mm square extrusions steel | L 40 \times W 40 \times H 60 mm | 0.11 lbs



■ without mounting parts

Accessories


Fixing angle

for extrusions 80/120 mm L 80 × W 60 × H 40 mm



M 1117.37

for 80 mm and 120 mm square extrusions steel | L 80 \times W 60 \times H 40 mm | 0.456 lbs

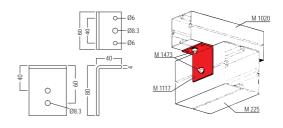

■ without mounting parts

Safety parts

Reinforcement


with 2 × M 1435/70 L 67.6 × W 8 × H 67.6 mm



M 1150.37

for system groove 4.3 mm, incl. 2 \times set screw M 1435/70 (M8) and 2 \times round head screw with flange M 1557/20 (M6)

steel | L 67.6 × W 8 × H 67.6 mm | 0.452 lbs

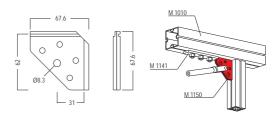

Reinforcement


with 3 × M 1435/70 L 102.6 × W 8 × H 102.6 mm



M 1129.37

for system groove 4.3 mm, incl. 3 \times set screw M 1435/70 (M8) and 2 \times round head screw with flange M 1557/20 (M6)

steel | L 102.6 × W 8 × H 102.6 mm | 0.829 lbs

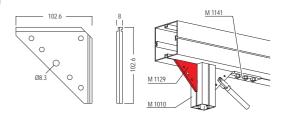

Reinforcement


with 4 × M 1435/70 L 300 × W 8 × H 300 mm




M 1139.37

for system groove 4.3 mm, incl. 4 × set screw M 1435/70 (M8) and 4 × round head screw with flange M 1557/20 (M6)

steel | L 300 × W 8 × H 300 mm | 4.361 lbs





Corner bracing


with 2 × M 1142 L 240 × W 160 × H 25 mm




M 1112.21

for system groove 4.3 mm, incl. 2 \times hammerhead fixing set M 1142 on both ends

steel | L 240 \times W 160 \times H 25 mm | 0.816 lbs





Beam retainer


for adaptor M 1101 / M 1103 L 27 × W 10 × H 10 mm



M 1108.37

for adaptor M 1101 and M 1103 steel | L 27 \times W 10 \times H 10 mm | 0.024 lbs





Safety parts

Beam retainer


with set screw M 1105/20 L 75 × W 52 × H 16 mm



M 1105.00

2 parts, for mounting to system groove 4.3 mm, incl. 1 \times set screw M 1105/20 (M4)

aluminium | L 75 × W 52 × H 16 mm | 0.128 lbs



→ Attention: Beam retainer has to be used for safety reasons


Anti-slipping device

with 3 × M 1473 L 120 × W 25 × H 6 mm



M 1141.37

for system groove 4.3 mm, incl. 3 \times hammerhead screw M 1473 steel | L 120 \times W 25 \times H 6 mm | 0.278 lbs

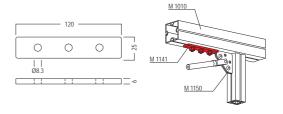

■ Attention: to be used for safety reasons

Reinforcing plate


with 6 × M 1473 L 240 × W 240 × H 6 mm




M 1164.21

for extrusions 80 \times 80 mm, incl. 6 \times hammerhead screw M 1473 (M8)

steel | L 240 × W 240 × H 6 mm | 3.384 lbs





■ Attention: item has to be used for safety reasons as "beam retainer"

Doors

Door set

for 80 mm W 950 × H 2500 × D 80 mm




W 805-SET.01 | .03

1 × door element made of M 2120/W 906, for fabric/panel on both sides, DIN left/right, inward/outward opening, door leaf flush with door leaf frame on the outside or inside, incl. door leaf frame and dead lock cylinder W 514, without hook tape W 840, outer frame dimensions door leaf frame: 908 × 2442 mm

aluminium/steel | W 950 x H 2500 x D 80 mm | 40.172 lbs





- Only use silicone edge 12 × 3 mm for door leaf frame
 - fabric dimension = outer frame dimension

Window element


for W 805 W 828 × H 2362 × D 40 mm




W 809.01

1 × window element W 906 for fabric/panel on both sides, for installation in door element W 805, window cut-out: W 200 × H 800 mm

aluminium | W 828 × H 2362 × D 40 mm | 15.587 lbs





■ Only use silicone edge 12 × 3 mm for door leaf frame

Door set

for 40/80/120 mm W 950 × H 2500 × D 40 mm




W 575-SET.01

1 × door element made of W 906, for fabric/panel on both sides, DIN left/right, inward/outward opening, incl. doorleafframe, dooruprightframe, threshold plate and door frame (top), hook tape W 840, extrusion connector E 438 and dead lock cylinder W 514, outer frame dimensions: door leaf frame: 855 × 2021 mm, door frame (top): 870 × 450 mm

aluminium/steel | W 950 x H 2500 x D 40 mm | 40.172 lbs





- → Only use silicone edge 12 × 3 mm for doorleafframe
- fabric dimension = outer frame dimension

Door


for 40/80/120 mm 40 mm, custom size




W 575SO.01

1 × door element made of W 906, for fabric/panel on both sides, DIN left/right, inward/outward opening, incl. doorleafframe, dooruprightframe, threshold plate and door frame (top), hook tape W 840, extrusion connector E 438, without dead lock cylinder W 514, 40 mm, custom size: please specify door element width and door element height when ordering

aluminium/steel | 40 mm, custom size |





- Only use silicone edge 12 × 3 mm for doorleafframe
- fabric dimension = outer frame dimension

Door Mounting Set


for door W 575 integration into 80 mm



W 575-080.01

for flush or 20 mm projecting connection of the doorelement W 575 to Maxima 80 or OCTAwall pro, consisting of: 6 × mounting bracket W 575-080A, 6 × retractable sliding block C 60 590, 12 × countersunk screw (M4) VA 1058/20

aluminium | L 40 × W 32 × H 60 mm | 0.322 lbs

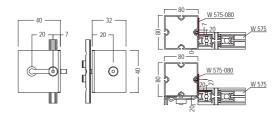

Doors

Door frame

for door panel W 580 / W 581 W 950 × H 2030 × D 16 mm




W 580/Z.01

for door panel W 580 / W 581, right side, can be changed to door stop left side, incl. 1 × threshold seal W 585, assembly dimension 950 \times 2030 mm

aluminium | W 950 × H 2030 × D 16 mm | 10.293 lbs





Door set

Set right W 860 × H 1985 × D 39 mm



W 580-SET.30

Set includes: 1 × door leaf DIN right W 580/T for door frame W 580/Z, 1 × W 517/R mortise lock PZ DIN right, 1 × door handle set W 584PZ with rosette, 1 × profile double cylinder W 514 incl. 3 keys W 415/S, 1 × threshold plate W 524 for door frame W 580/Z, axis measurement 990 mm

wood/steel | W 860 × H 1985 × D 39 mm | 38.995 lbs



Door set


Set left W 860 × H 1985 × D 39 mm



W 581-SET.30

Set includes: 1 × door leaf DIN left W 581/T for door frame W 580/Z, 1 × W 517/L mortise lock PZ DIN left, 1 × door handle set W 584PZ with rosette, 1 × profile double cylinder W 514 incl. 3 keys W 415/S, 1 × threshold plate W 524 for door frame W 580/Z, axis measurement 990 mm

wood/steel | W 860 × H 1985 × D 39 mm | 38.995 lbs



Threshold plate

for axis measurement 990 mm for W 510/Z / W 580/Z




W 524.37

for door frames W 510/Z and W 580/Z, for axis measurement 990 $\,$ mm

steel | L 1140 \times W 50 \times H 5 mm | 3.902 lbs





Door cylinder


for W 425 / W 575 / W 805 L 61 × W 42 × H 28 mm



W 514.38

1 × dead lock cylinder, for mounting into door W 425 / W 575 / W 805, incl. 3 × key W 514/S

steel | L 61 \times W 42 \times H 28 mm | 0.489 lbs



Fabric/Panel/Glass


Tension fabric extr.

45° for single sided fabric



M 1321.01

45°, for single sided fabric (with silicone edge M 1313), with 11 × hole 8.9 × 18 mm, for mounting in system groove: for 40 mm square extrusions use fixing set M 1348, for 80 mm and 120 mm square extrusions use fixing clip M 1339 and fixing set M 1348 aluminium | L 6000 × W 43 × H 20 mm | 5.053 lbs

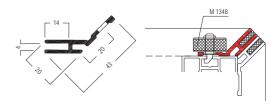

Tension fabric extr.


for single sided fabric L 6000 × W 28.5 × H 20 mm



M 1322.01

for single sided fabric (with silicone edge M 1313), with 11 × hole 8.9 × 18 mm, for mounting in system groove: for 40 mm square extrusions use fixing set M 1348, for 80 mm and 120 mm square extrusions use fixing clip M 1339

aluminium | L 6000 × W 28.5 × H 20 mm | 4.471 lbs



Tension fabric extr.


90° internal corner for single sided fabric



M 1322/I.01

 90° internal corner, for single sided fabric (with silicone edge M 1313), with 11 × hole 8.9 × 18 mm, for mounting in system groove: for 40 mm square extrusions use fixing set M 1348, for 80 mm and 120 mm square extrusions use fixing clip M 1339

aluminium | L 6000 \times W 56.3 \times H 27.8 mm | 10.172 lbs

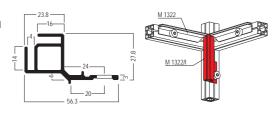

Tension fabric extr.


90° outer corner for single sided fabric




M 1322/E.01

 90° outer corner, for single sided fabric (with silicone edge M 1313), with 11 × hole 8.9 × 18 mm, for mounting in system groove: for 40 mm square extrusions use fixing set M 1348, for 80 mm and 120 mm square extrusions use fixing clip M 1339 and fixing set M 1348

aluminium | L 6000 × W 48.5 × H 27.8 mm | 9.753 lbs





Fixing set


for M 1321 / M 1322/E/I L 21 × W 24 × H 24 mm



M 1348.37

two-parts, only for mounting of extrusion M 1321 / M 1322 / M 1322/E / M 1322/I to system groove 4.3 mm, with 1 \times galvanized hammerhead screw M 1348/Ha

steel | L 21 × W 24 × H 24 mm | 0.084 lbs

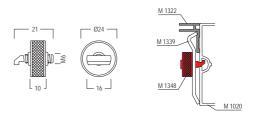

Fabric/Panel/Glass

Retainer


for extrusions 80/120 mm for fixing set M 1348




M 1339.37

for extrusions 80/120 mm, for mounting extrusions M 1321 / M 1322 / M 1322/E / M 1322/I to system groove 4.3 mm, for fixing set M 1348

steel | L 70.7 × B 28 × H 10 mm | 0.082 lbs





◄ in connection with M 1348

Tension fabric extr.

for system groove 4.3 mm for single sided fabric



M 1319.35

for single sided fabric (with silicone edge M 1313), for system groove $4.3\,\mathrm{mm}$, with $2\,\mathrm{fabric}$ grooves

plastic | L 6000 × W 15 × H 20 mm | 3.219 lbs






Tension fabric extr.


for double sided fabric L 6000 × W 80 × H 9 mm



M 1325.01

for double sided fabric (with silicone edge M 1313), for mounting in system groove with fixing set M 1345, with 13 × hole 18 mm dia. aluminium | L 6000 × W 80 × H 9 mm | 11.751 lbs





■ in connection M 1345

Fixing set


for M 1310/M 1325/M 1330 L 28 × W 24 × H 24 mm




M 1345.37

only for fixing of extrusions M 1310 / M 1325 / M 1330 to system groove 4.3 mm, with 1 \times hammerhead screw M 1345/Ha "gunmetal finish"

steel | L 28 × W 24 × H 24 mm | 0.086 lbs





Wall panel retainer


top for extrusions 80 × 80 mm




M 1572.00

top, for single or double sided panel clad wall in conjunction with 80 mm square extrusions $\,$

aluminium | L 5000 \times W 58 \times H 6 mm | 3.911 lbs





Fabric/Panel/Glass

Wall panel retainer


centre for extrusions 80 × 80 mm




M 1577.00

centre, for single or double sided panel clad wall in conjunction with 80 mm square extrusions

aluminium | L 5000 × W 58 × H 16 mm | 5.41 lbs





Wall panel retainer

bottom for extrusions 80 × 80 mm




M 1581.00

bottom, for single or double sided panel clad wall in conjunction with 80 mm square extrusions

aluminium | L 5000 × W 23 × H 44 mm | 4.458 lbs





Panel retainer

for glass 5-6 mm for panel max. 10 mm




M 1391.90

for 5 - 6 mm glass or max. 10 mm panels, assembly without tools, incl. rubber inserts and 1 \times hammerhead screw M 1470/Ha (M8) steel, zinc-plated/stainless steel | L 30 \times W 30 \times H 8 mm | 0.168 lbs







Panel retainer

for glass 8-10 mm for panel max. 14 mm




M 1392.90

for 8 - 10 mm glass or max. 14 mm panels, assembly without tools, incl. rubber inserts and 1 \times hammerhead screw M 1475/Ha (M8) steel, zinc-plated/stainless steel | L 30 \times W 30 \times H 8 mm | 0.172 lbs







Glass panel retainer

for glass 4-6 mm L 5000 × W 16 × H 10 mm



E 424.30 | .35

for 4 - 6 mm panels

plastic | L 5000 \times W 16 \times H 10 mm | 0.992 lbs





Fabric/Panel/Glass

Glass panel retainer

for glass 4-8 mm L 5000 × W 16 × H 16.5 mm



E 420.30 | .33 | .35

for 4 - 8 mm panels plastic | L 5000 \times W 16 \times H 16.5 mm | 1.83 lbs





Glass retainer


for glass 8 mm L 38 × W 23 × H 52 mm





M 1445.39

for glass thickness 8 mm, for mounting to system groove 4.3 mm, with 1 \times hammerhead screw M 1470/Ha (M8)

zinc die cast | L 38 × W 23 × H 52 mm | 0.353 lbs







Glass retainer


for glass 10 mm L 45 × W 27.5 × H 63 mm




M 1447.39

for glass thickness 10 mm, for mounting to system groove 4.3 mm, with 1 \times hammerhead screw M 1470/Ha (M8)

zinc die cast | L 45 \times W 27.5 \times H 63 mm | 0.597 lbs







Glass retainer


for glass 12 mm L 45 × W 27.5 × H 63 mm





M 1467.39

for mounting to system groove 4.3 mm, for glass thickness 12 mm, with 1 \times hammerhead screw M 1470/Ha (M8)

zinc die cast | L 45 × W 27.5 × H 63 mm | 0.584 lbs







Hinges

Hinged end plate

for extrusions 80 × 80 mm L 82 × W 82 × H 109 mm




M 1260.21

for all square extrusions 80 mm, incl. 2 \times countersunk screw M 1250/20 (M8) and 1 \times anti–slipping device M 1299









Adaptor


for extrusions 80 × 80 mm L 80 × W 57 × H 19.5 mm




M 1281.00

for all square and round extrusions 80 mm, with 2 \times thread M8 incl. 2 \times countersunk screw M 1611/20 (M5)

aluminium | L 80 × W 57 × H 19.5 mm | 0.236 lbs







Hinged flange plate


for 78 mm dia. for system groove 4.3 mm




M 1270.21

for all hinged end plates and hinged flange plates with 78 mm dia., for mounting to system groove 4.3 mm, incl. fixing screws and 1 \times anti–slipping device M 1299

steel | L 109 × W 78 × H 60 mm | 0.697 lbs





Hinged flange plate

for 78 dia. for system groove 4.3 mm




M 1271.21

for 78 dia., incl. 2 \times hammerhead screw M 1472 (M8) and 1 \times anti-slipping device M 1299

steel | L 102 \times W 82 \times H 82 mm | 1.16 lbs





Covering

for 78 mm dia. 1 pair



M 1278.35

1 pair, for all hinged end plates and hinged flange plates with 78 mm dia, incl. threaded steel rod M12 $\,$

plastic, light grey | L 25 \times W 80 \times H 80 mm | 0.313 lbs





₹ maxima 80

Hinges

Anti-slipping device


for 78 mm dia. L 70 × W 70 × H 0.6 mm



M 1299.33

self-adhesive paper for all hinged end plates and hinged flange plates with 78 mm dia.

paper, flocked | L 70 × W 70 × H 0.6 mm |

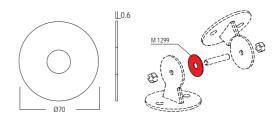

Hinged set


for system groove 4.3 mm L 24 × W 24 × H 74 mm



M 1457.39

for mounting to system groove 4.3 mm, incl. 2 \times hammerhead bolt M 1142

steel | L 24 × W 24 × H 74 mm | 0.522 lbs





Electrical parts

Pendant light


1 illuminated side L 1000 × W 80 × H 80 mm



OL 3100.01 | .03

Set consisting of: 1 × upright L 1022-1000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 x 3.500 mm OL 466, 2 × wire rope retainer set L 222

aluminium | L 1000 × W 80 × H 80 mm | 9.052 lbs

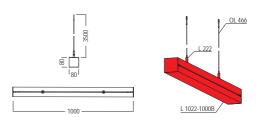

Pendant light


1 illuminated side L 2000 × W 80 × H 80 mm



OL 3200.01 | .03

Set consisting of: 1 × upright L 1022-2000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 × 3.500 mm OL 466, 2 × wire rope retainer set L 222

aluminium | L 2000 × W 80 × H 80 mm | 15.284 lbs

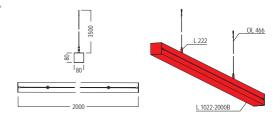

Pendant light


1 illuminated side L 3000 × W 80 × H 80 mm



OL 3300.01 | .03

Set consisting of: 1 × upright L 1022-3000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 x 3.500 mm OL 466, 2 × wire rope retainer set L 222

aluminium | L 3000 × W 80 × H 80 mm | 21.786 lbs

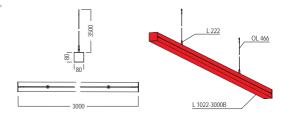

Wallwasher


LED / 28W / 230V L 812 × W 166 × H 263 mm



M 1497.31 | .33

for uniform illumination of 1000 mm width and 2500 mm height (5700 Kelvin > Cri 90, 3600 lm, 28 W, 125 lm/W), for 230 V power source, for system groove 4.3 mm, space-saving and securely packed, with 16 high-power LEDs, PSU incl. cable (500 mm to lamp and 2500 mm from power supply)

aluminium | L 812 × W 166 × H 263 mm | 4.5 lbs



Hanging lamp


LED / 56W / 230V L 818 × W 150 × H 35 mm



M 1497-H.33

for a homogenous illumination in 5700K > Cri 90, with 32 highpower LEDs, 7200 lm, 56 W, 128 lm/W, for 230 V, incl. 3.5 m wire rope with 2 × Reutlinger wire rope holders to adjust height, 2 × plastic end caps black, 1 × power supply unit incl. DC distributor, 3 m extension cable with DC connector

aluminium, matt powder-coated | L 818 \times W 150 \times H 35 mm | 5.489 lbs



Electrical parts


Power supply

for wallwasher M 1497 L 1175 × W 72 × H 35 mm



M 1497-11.90

for wallwasher M 1497, converter with 24V, 6.67A, 160W, rated voltage AC 100-240V, 50/60Hz, cable 1000 mm long plastic | L 1175 \times W 72 \times H 35 mm | 1.407 lbs



■ Attention: suitable power cord M 1497-12 is required

Cable

for wallwasher M 1497 2500 mm long



M 1497-12.90

for wallwasher M 1497, power cord CEE 7/7 - C13 plastic, black | 2500 mm long | 0.571 lbs




Extension cable

for wallwasher M 1497 3000 mm long



cable for connecting M 1497 wall-washers, with angled barrel connector at both ends $\,$

plastic, black | 3000 mm long | 0.282 lbs






PWM Dimmer

for wallwasher M 1497 L 150 × W 40 × H 20 mm



M 1497-4.90

1 × control unit and remote control for dimming of max. 5 wall-washer M 1497, DC 12-24 V, 2.4 GHz, PWM frequency 1.95 KHz plastic | L 150 × W 40 × H 20 mm | 0.227 lbs



Cable


Y-Splitter for wallwasher M 1497



M 1497-3.90

Y-cable for connecting up to 5 \times wallwasher M 1497, with barrel connector at all ends

plastic, black | 300 mm long | 0.09 lbs

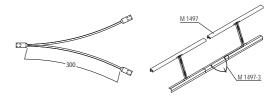

Electrical parts

Long-arm floodlight


25 W L 490 × W 232 × H 40 mm



M 1494.31 | .33

for swivel mounting in system groove, incl. adapter plate and connection cable 3 m, 25 W, 2500 lm, 4000 K, voltage input: 100-240 VAC, voltage output: 27-35 VDC, color rendering index: 80+ CRI, beam angle: 120°

aluminium | L 490 × W 232 × H 40 mm | 1.675 lbs





■ without connecting cable M 1494-xxxx


Connecting cable


for M 1494 1000 mm long



M 1494-1000.33

230V connecting cable for IEC C13 connections, one side plug, one side socket, can also be used as an extension rubber | 1000 mm long | 0.254 lbs





Weitere Abmessungen:

M 1494-2000.33 M 1494-3000.33 2000 mm lang 3000 mm lang 0.507 lbs 0.772 lbs


Long-arm floodlight


LED / 12W / 230V L 535 × W 119 × H 250 mm



M 1498.31


for voltage 100 - 230 V, for mounting in system groove 4.3 mm, 12 W / 230 V, 4000 K, 960 lm, incl. 1 × M 1481 retainer, 1 × cable 3000 mm, with integrated transformer and screwed on safety glass aluminium | L 535 × W 119 × H 250 mm | 1.354 lbs






Retainer


for long-arm floodlight M 1498 L 26 × W 35 × H 16 mm



M 1481.01

for installation in 4.3 mm system groove (extrusion top face) can be used in combination with long-arm spot light M 1480 / M 1499 aluminium | L 26 \times W 35 \times H 16 mm | 0.031 lbs





₹ maxima 80

Electrical parts

Cable retaining


small for system groove 4.3 mm



E 460.35

small, for mounting of cables to system groove plastic, semi-hard | L 5000 \times W 16 \times H 20 mm | 1.609 lbs






Cable retaining

big for system groove 4.3 mm



E 463.35

big, for system groove 4.3 mm plastic, semi-hard | L 5000 \times W 30 \times H 30 mm | 2.634 lbs








Index

→ TECHNICAL FEATURES	124
→ OVERVIEW	126
对 COMPONENTS	
→ Basic parts	129
→ Accessories	133
¬ Safety parts	137
⊿ Doors	140
→ Fabric/Panel/Glass	142
→ Hinges	146
7 Electrical parts	147



Technical features

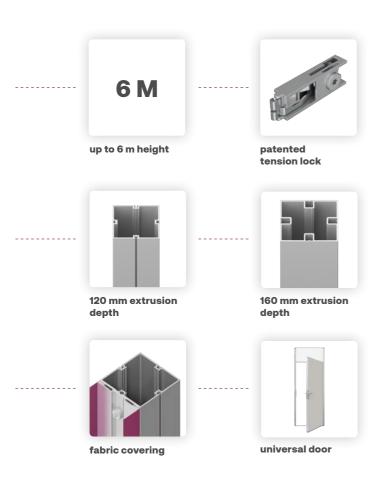

Big, bigger, maxima.

Visible constructions and extrusions. Booth designs that require a lot of freedom. With an extrusion depth of 120 and 160 mm, this system focuses on its columnar appearance. The high span bridges large areas easily – without any additional support. And to ensure that the system matches your brand image, the extrusions can be coated in your preferred color: **maxima 120** or **160** as a supporting design element.

Exposed. And dressable.


Just like the rest of the **maxima** family, the system can be covered with panels and fabrics. On one or both sides. Stable and securely mounted – ready to spread your exhibition message. The suspension system **octarig** and the double-deck system **octamax** create additional space on your booth. Further eye-catchers can also be placed in combination with **octalumina 120**. Leave nothing to chance and guide the attention of your visitors!

Overview

Basic parts M 225 M 226 M 1041 M 260 M 1102 M 1111 M 1410 M 1419 M 1133 M 1122 M 1104/L M 1104/R M 1124 M 1126 M 1161/L M 1161/R Accessories M 285 M 1426 M 274 M 261



M 1046

































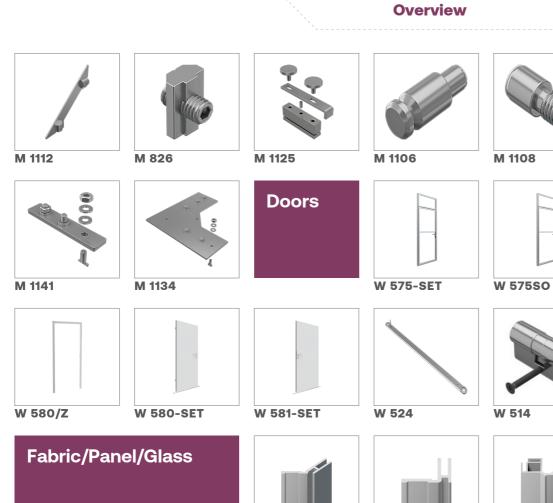









M 1105

W 575-120





































Overview

Electrical parts



OL 3100



















М 1497-Н











Basic parts

Square extrusion


4 system grooves L 5000 × W 120 × H 120 mm




M 225.01

adaptors with tension lock M 1102 / M 1122, adaptors with safety tension lock M 1124 / M 1126, with 4 system grooves

aluminium | L 5000 × W 120 × H 120 mm | 43.664 lbs





Square extrusion


L 6000 × W 120 × H 120 mm 6000 mm long




M 226.01

adaptors with tension lock M 1102 / M 1122, adaptors with safety tension lock M 1124 / M 1126

aluminium | L 6000 × W 120 × H 120 mm | 50.062 lbs





Square extrusion


offen L 6000 × W 120 × H 120 mm




M 1041.01

open, incl. 8 × reinforcement extrusion M 1110, each 80 mm long and 1 × set screw M1110/20 (M5), adaptors with tension lock M 1104/R and M 1104/L can be mounted

aluminium | L 6000 × W 120 × H 120 mm | 49.701 lbs





Corner upright extrusion


90° corner, round L 6000 × W 120 × H 120 mm




M 260.01

for connecting extrusions with width 16, 40, 80, 120 mm, OCTAwall pro or OCTAwall 40 frames, fabric can be stretched over the extrusion

aluminium | L 6000 × W 120 × H 120 mm | 56.217 lbs





Corner connector


90° for extrusions 120 × 120 mm




M 1111.00

 $90^{\circ},$ for all closed square extrusions 120 mm, incl. 8 × countersunk screw M 1102/20

aluminium | L 240 \times W 240 \times H 19.5 mm | 2.216 lbs





Basic parts

Knuckle


for cable suspension L 120 × W 120 × H 170 mm




M 1410.01

for cable suspension, with 1 \times eye bolt for cable suspension, with 8 \times slot for secure tension lock M 1161/L and M 1161/R

aluminium | L 120 \times W 120 \times H 170 mm | 4.29 lbs





Spigot tube


square for extrusions 120 × 120 mm




M 1419.00

for extension of upright extrusions, for all square extrusions 120 $\,$ mm

aluminium | L 120 × W 120 × H 604 mm | 4.061 lbs







Internal connector


straight for 1000-3000 mm



M 1133.00

straight, for all square and round extrusions 120 mm with a length from 1000 - 3000 mm, incl. 8 \times countersunk screws M 1102/20 (M6)

aluminium | L 92 \times W 23 \times H 720 mm | 3.269 lbs



Adaptor


with 2 × Z 961/13 for extrusions 120 mm




M 1102.00

for all closed square extrusions 120 mm, incl. 2 \times tension lock Z 961/13, 1 \times knurled-head screw M 1102/21 (M4) for beam retainer M 1106, 2 \times collar guide M 1102/2 and 4 \times countersunk screws M 1102/20 (M6)

aluminium | L 108 \times W 22.5 \times H 95 mm | 0.747 lbs






Adaptor


with 2 × Z 961/13 for extrusions 120 mm



M 1122.00

for all square extrusions 120 mm, incl. 2 × tension lock Z961/13, 1 × set screw M 1122/20 (M16), 1 × washer M 1122/2, 1 × nut M 551/31 (M16), 2 × collar guide and 4 × countersunk screw M 1102/20 (M6) aluminium | L 108 × W 22.5 × H 95 mm | 1.19 lbs





■ in conjunction with M 230

Basic parts

Adaptor


with 2 × Z 961/13 for extrusions 120 mm




M 1104/L.00

for all open square extrusions 120 mm, incl. 2 × tension lock Z 961/13, 1 × set screw M 1104/21 (M6) for M 1106, 2 × collar guide M 1102/2 and 4 × countersunk screw M 1102/20 (M6)

aluminium | L 108 × W 95 × H 95 mm | 1.25 lbs





Adaptor


with 2 × Z 961/13 for extrusions 120 mm




M 1104/R.00

for all open square extrusions 120 mm, incl. 2 \times tension lock Z 961/13, 1 \times set screw M 1104/21 (M6) for M 1106, 2 \times collar guide M 1102/2 and 4 \times countersunk screw M 1102/20 (M6)

aluminium | L 108 × W 95 × H 95 mm | 1.25 lbs





Adaptor


with 2 × M 1161/R for extrusions 120 mm




M 1124.00

for all square extrusions 120 mm, incl. 2 × safety tension lock M 1161/R, 2 × collar guide M 1102/2 and 4 × countersunk screw M 1124/20 (M6)

aluminium | L 108 × W 19.5 × H 95 mm | 0.886 lbs





Adaptor


with 2 × M 1161/L for extrusions 120 mm




M 1126.00

for all square extrusions 120 mm, incl. 2 \times safety tension lock M 1161/L, 2 \times collar guide M 1102/2 and 4 \times countersunk screw M 1124/20 (M6)

aluminium | L 108 × W 19.5 × H 95 mm | 0.886 lbs






Safety tension lock


left lock chamber 39 × 12 mm



M 1161/L.90

left, for extrusions with lock chamber 39 \times 12 mm plastic/steel | L 86.5 \times W 38.5 \times H 11,5 mm | 0.194 lbs





Basic parts


Safety tension lock


right lock chamber 39 × 12 mm



M 1161/R.90

right, for extrusions with lock chamber 39 \times 12 mm plastic/steel | L 86.5 \times W 38.5 \times H 11,5 mm | 0.194 lbs





Accessories

Adjustable foot


for extrusions 120 × 120 mm L 123 × W 123 × H 74 mm



M 285.37

for all square extrusions 120 mm, thread M16, incl. 2 \times set screw M 1075/20 (M4)

steel | L 123 × W 123 × H 74 mm | 1.742 lbs





Base plate


for extrusions 120 mm L 450 × W 450 × H 250 mm



M 1426.21

for all square extrusions 120 mm, incl. adaptor M 825/A and 4 \times countersunk screw eZ5030/20 (M10)

steel | L 450 × W 450 × H 250 mm | 25.221 lbs



End plate


for extrusions 120 × 120 mm L 121 × W 121 × H 3 mm



M 274.21

for all square extrusions 120 mm, incl. 2 \times set screw M 1075/20 (M4)

steel | L 121 \times W 121 \times H 3 mm | 0.794 lbs





End plate


for 80 mm extrusions for M 260




M 261.21

for Quarter-round extrusion M 260 in connection with 80 mm extrusions, to create top and bottom horizontal fabric groove, with drilling 11 mm dia. for adjustable foot

steel | L 120 \times W 120 \times H 6 mm | 0.739 lbs






End plate


for 120 mm extrusions for M 260



M 271.21

for Quarter-round extrusion M 260 in connection with 120 mm extrusions, to create top and bottom horizontal fabric groove steel | L 120 \times W 120 \times H 6 mm | 0.992 lbs





Accessories

Cover extrusion


for extrusions M 1041 L 6000 × W 91 × H 11 mm



M 1046.01

for extrusion M 1041, incl. 2 \times round cord M 265 aluminium | L 6000 \times W 91 \times H 11 mm | 12.068 lbs





Cover extrusion

for extrusions 120 mm L 5000 × W 121 × H 6 mm




M 1368.01

can be powder-coated or film laminated, with slide-on technique for all extrusions 120 mm

aluminium | L 5000 × W 121 × H 6 mm | 6.834 lbs






Distance piece


with 2 × M 1142 L 40 × W 24 × H 24 mm



M 1146.01

for system groove 4.3 mm, incl. 2 × hammerhead bolt M 1142 steel | L 40 × W 24 × H 24 mm | 0.15 lbs





Internal connector


with 2 × Z 961/13 L 62 × W 16 × H 50 mm




Z 910.01

beam extrusion Z 402, to be used as shortest connection element between two extrusions, incl. 2 × built-in tension lock Z 961/13

aluminium | L 62 × W 16 × H 50 mm | 0.353 lbs





Adaptor


for monitor 15" - 21" L 120 × W 120 × H 16 mm



E 185.01

for LCD screens 15", 17", 19", 21", incl. mounting material with 8 \times borehole 5 mm dia.

aluminium | L 120 \times W 120 \times H 16 mm | 1.23 lbs

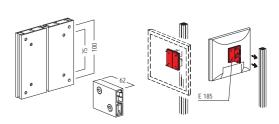

Accessories

Screw eye

max. 45 kg Opening 12.3 mm dia.



E 218.41

for system groove 4.3 mm, opening 12.3 mm dia., with 1 × hammerhead screw E 218/1 (M5) and 1 × eye nut steel | L 28 × W 22 × H 12 mm | 0.029 lbs



■ maximum load capacity 45 kg

Screw eye


max. 35 kg Opening 20 mm dia.



M 1233.37

for system groove 4.3 mm, opening 20 mm dia., consists of 1 \times hammer head screw (M8) M 1470/Ha and 1 \times eye nut (M8) M 1401/21

steel | L 36 × W 20 × H 36 mm | 0.134 lbs



max. load capacity 35 kg

Connector part


incl. 2 × M 1435/70 L 50 × W 56 × H 40 mm



M 1435.00

for system groove 4.3 mm, incl. 2 × set screw M 1435/70 (M8), 1 × M1435/20 hex bolt, 1 × M 1435/30 hex nut, 2 × M 1435/40 washer (M8)

aluminium | L 50 \times W 56 \times H 40 mm | 0.143 lbs





■ Attention: max. load capacity 70 kg

Connector part

max. 100 kg for rope suspension




M 1174.37

usable for rope suspension, for connection to 4.3 mm system groove, incl. 2 × set screw M 1435/70 (M8) and 2 × lenticular flange head screw M 1557/20 (M6), max. load capacity 100 kg

steel | L 76 × W 66 × H 8 mm | 0.562 lbs







Attention: max. load capacity 100 kg

Connector part


max. 150 kg for rope suspension




M 1172.37

usable for rope suspension, for connection to 4.3 mm system groove, incl. 3 \times set screw M 1435/70 (M8) and 2 \times lenticular flange head screw M 1557/20 (M6), max. load capacity 150 kg

steel | L 136 × W 66 × H 50 mm | 1.182 lbs





■ Attention: max. load capacity 150 kg

₹ maxima 120

Accessories


Fixing angle


for cable fixing L 110 × W 60 × H 110 mm



M 1107.21

for cable fixing, incl. 4 × hammerhead screw M 812 steel | L 110 × W 60 × H 110 mm | 1.759 lbs






Fixing angle


for extrusions 80/120 mm L 80 × W 60 × H 40 mm



M 1117.37

for 80 mm and 120 mm square extrusions steel | L 80 \times W 60 \times H 40 mm | 0.456 lbs





without mounting parts

Safety parts

Reinforcement


with 2 × M 1435/70 L 67.6 × W 8 × H 67.6 mm



M 1150.37

for system groove 4.3 mm, incl. 2 × set screw M 1435/70 (M8) and 2 × round head screw with flange M 1557/20 (M6)

steel | L 67.6 × W 8 × H 67.6 mm | 0.452 lbs

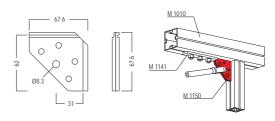

Reinforcement


with 3 × M 1435/70 L 102.6 × W 8 × H 102.6 mm



M 1129.37

for system groove 4.3 mm, incl. 3 \times set screw M 1435/70 (M8) and 2 \times round head screw with flange M 1557/20 (M6)

steel | L 102.6 × W 8 × H 102.6 mm | 0.829 lbs

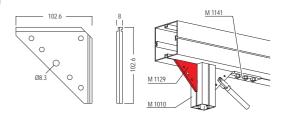

Reinforcement


with 4 × M 1435/70 L 300 × W 8 × H 300 mm




M 1139.37

for system groove 4.3 mm, incl. 4 \times set screw M 1435/70 (M8) and 4 \times round head screw with flange M 1557/20 (M6)

steel | L 300 × W 8 × H 300 mm | 4.361 lbs





Corner bracing


with 2 × M 1142 L 240 × W 160 × H 25 mm



M 1112.21

for system groove 4.3 mm, incl. 2 \times hammerhead fixing set M 1142 on both ends

steel | L 240 \times W 160 \times H 25 mm | 0.816 lbs





Reinforcing plate


with set screw M 826/S small



M 826.00

small, incl. 1 \times set screw M 826/S (M6) aluminium | L 16 \times W 10 \times H 6 mm | 0.011 lbs





Safety parts

Beam retainer


for extrusion M 1041 L 56 × W 16 × H 22 mm



M 1125.37

to be used with extrusion M 1041, facilitates the assembly of the beam extrusions

steel, zinc plated | L 56 \times W 16 \times H 22 mm | 0.311 lbs

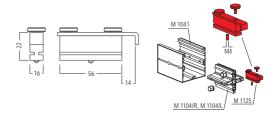

→ Attention: beam retainer has to be used for safety reasons

Beam retainer


for M 1102 / M 1104/L/R L 38 × W 14 × H 14 mm



M 1106.37

for adaptor M 1102 / M 1104/L and M 1104/R steel | L 38 \times W 14 \times H 14 mm | 0.075 lbs





Beam retainer


for adaptor M 1101 / M 1103 L 27 × W 10 × H 10 mm



M 1108.37

for adaptor M 1101 and M 1103 steel | L 27 \times W 10 \times H 10 mm | 0.024 lbs





Beam retainer


with set screw M 1105/20 L 75 × W 52 × H 16 mm



M 1105.00

2 parts, for mounting to system groove 4.3 mm, incl. 1 \times set screw M 1105/20 (M4)

aluminium | L 75 × W 52 × H 16 mm | 0.128 lbs





■ Attention: Beam retainer has to be used for safety reasons


Anti-slipping device

with 3 × M 1473 L 120 × W 25 × H 6 mm



M 1141.37

for system groove 4.3 mm, incl. 3 × hammerhead screw M 1473 steel | L 120 × W 25 × H 6 mm | 0.278 lbs



■ Attention: to be used for safety reasons

Safety parts

Reinforcing plate


with 6 × M 1473 for extrusions 120 × 120 mm




M 1134.21

for extrusions 120 \times 120 mm, incl. 6 \times hammerhead screw M 1473 M8

steel | L 280 × W 280 × H 6 mm | 5.37 lbs





→ Attention: to be used for safety reasons as "beam retainer"

Doors

Door set

for 40/80/120 mm W 950 × H 2500 × D 40 mm




W 575-SET.01

 $1\times$ door element made of W 906, for fabric/panel on both sides, DIN left/right, inward/outward opening, incl. doorleafframe, dooruprightframe, threshold plate and door frame (top), hook tape W 840, extrusion connector E 438 and dead lock cylinder W 514, outer frame dimensions: door leaf frame: 855 \times 2021 mm, door frame (top): 870 \times 450 mm

aluminium/steel | W 950 × H 2500 × D 40 mm | 40.172 lbs

7 Only use silicone edge 12 × 3 mm for doorleafframe
 7 fabric dimension = outer frame dimension





Door

for 40/80/120 mm 40 mm, custom size




W 575SO.01

1 × door element made of W 906, for fabric/panel on both sides, DIN left/right, inward/outward opening, incl. doorleafframe, dooruprightframe, threshold plate and door frame (top), hook tape W 840, extrusion connector E 438, without dead lock cylinder W 514, 40 mm, custom size: please specify door element width and door element height when ordering

aluminium/steel | 40 mm, custom size |

X = 700-1080 mm X1 = 605-985 mm X2 = 620-1000 mm X2 = 620-1000 mm Y1 = 2380-2980 mm Y2 = 350-950 mm



- Only use silicone edge 12 × 3 mm for doorleafframe
 fabric dimension = outer frame dimension

Door Mounting Set


for door W 575 integration into 120 mm




W 575-120.01

for flush or 20 mm protruding connection of the door element W 575 to Maxima 120, consisting of: 6 × fixing angle W 575-120A, 6 × swivel-in slot nut C 60-590, 12 × countersunk screw M4 VA 1058/20

aluminium | L 60 × W 32 × H 60 mm | 0.392 lbs





Door frame

for door panel W 580 / W 581 W 950 x H 2030 x D 16 mm




W 580/Z.01

for door panel W 580 / W 581, right side, can be changed to door stop left side, incl. 1 × threshold seal W 585, assembly dimension 950 × 2030 mm

aluminium | W 950 × H 2030 × D 16 mm | 10.293 lbs





Door set


Set right W 860 × H 1985 × D 39 mm



W 580-SET.30

Set includes: 1 × door leaf DIN right W 580/T for door frame W 580/Z, 1 × W 517/R mortise lock PZ DIN right, 1 × door handle set W 584PZ with rosette, 1 × profile double cylinder W 514 incl. 3 keys W 415/S, 1 × threshold plate W 524 for door frame W 580/Z, axis measurement 990 mm

wood/steel | W 860 × H 1985 × D 39 mm | 38.995 lbs



Doors

Door set


Set left W 860 × H 1985 × D 39 mm



W 581-SET.30

Set includes: 1 × door leaf DIN left W 581/T for door frame W 580/Z, 1 × W 517/L mortise lock PZ DIN left, 1 × door handle set W 584PZ with rosette, 1 × profile double cylinder W 514 incl. 3 keys W 415/S, 1 × threshold plate W 524 for door frame W 580/Z, axis measurement 990 mm

wood/steel | W 860 × H 1985 × D 39 mm | 38.995 lbs



Threshold plate


for axis measurement 990 mm for W 510/Z / W 580/Z




W 524.37

for door frames W 510/Z and W 580/Z, for axis measurement 990 mm

steel | L 1140 \times W 50 \times H 5 mm | 3.902 lbs





Door cylinder


for W 425 / W 575 / W 805 L 61 × W 42 × H 28 mm



W 514.38

 $1\times$ dead lock cylinder, for mounting into door W 425 / W 575 / W 805, incl. $3\times$ key W 514/S

steel | L 61 × W 42 × H 28 mm | 0.489 lbs



Fabric/Panel/Glass


Tension fabric extr.

45° for single sided fabric



M 1321.01

45°, for single sided fabric (with silicone edge M 1313), with 11 × hole 8.9 × 18 mm, for mounting in system groove: for 40 mm square extrusions use fixing set M 1348, for 80 mm and 120 mm square extrusions use fixing clip M 1339 and fixing set M 1348 aluminium | L 6000 × W 43 × H 20 mm | 5.053 lbs

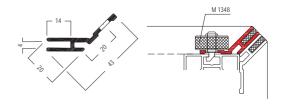

Tension fabric extr.


for single sided fabric L 6000 × W 28.5 × H 20 mm



M 1322.01

for single sided fabric (with silicone edge M 1313), with 11 × hole 8.9 × 18 mm, for mounting in system groove: for 40 mm square extrusions use fixing set M 1348, for 80 mm and 120 mm square extrusions use fixing clip M 1339

aluminium | L 6000 \times W 28.5 \times H 20 mm | 4.471 lbs



Tension fabric extr.


90° internal corner for single sided fabric



M 1322/I.01

 90° internal corner, for single sided fabric (with silicone edge M 1313), with 11 × hole 8.9 × 18 mm, for mounting in system groove: for 40 mm square extrusions use fixing set M 1348, for 80 mm and 120 mm square extrusions use fixing clip M 1339

aluminium | L 6000 \times W 56.3 \times H 27.8 mm | 10.172 lbs

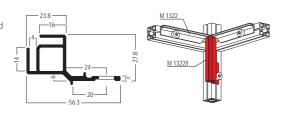

Tension fabric extr.


90° outer corner for single sided fabric




M 1322/E.01

 90° outer corner, for single sided fabric (with silicone edge M 1313), with 11 × hole 8.9 × 18 mm, for mounting in system groove: for 40 mm square extrusions use fixing set M 1348, for 80 mm and 120 mm square extrusions use fixing clip M 1339 and fixing set M 1348

aluminium | L 6000 × W 48.5 × H 27.8 mm | 9.753 lbs





Fixing set


for M 1321 / M 1322/E/I L 21 × W 24 × H 24 mm




M 1348.37

two-parts, only for mounting of extrusion M 1321 / M 1322 / M 1322/E / M 1322/I to system groove 4.3 mm, with 1 \times galvanized hammerhead screw M 1348/Ha

steel | L 21 \times W 24 \times H 24 mm | 0.084 lbs





Fabric/Panel/Glass

Retainer


for extrusions 80/120 mm for fixing set M 1348




M 1339.37

for extrusions 80/120 mm, for mounting extrusions M 1321 / M 1322 / M 1322/E / M 1322/I to system groove 4.3 mm, for fixing set M 1348

steel | L 70.7 × B 28 × H 10 mm | 0.082 lbs





■ in connection with M 1348

Tension fabric extr.

for system groove 4.3 mm for single sided fabric



M 1319.35

for single sided fabric (with silicone edge M 1313), for system groove 4.3 mm, with 2 fabric grooves

plastic | L 6000 × W 15 × H 20 mm | 3.219 lbs






Tension fabric extr.


for double sided fabric L 6000 × W 120 × H 9 mm



M 1330.01

for double sided fabric (with silicone edge M 1313), for mounting in system groove with fixing set M 1345, with 13 × hole 18 mm dia. aluminium | L 6000 × W 120 × H 9 mm | 18.254 lbs





■ in connection with M 1345

Fixing set


for M 1310/M 1325/M 1330 L 28 × W 24 × H 24 mm




M 1345.37

only for fixing of extrusions M 1310 / M 1325 / M 1330 to system groove 4.3 mm, with 1 \times hammerhead screw M 1345/Ha "gunmetal finish"

steel | L 28 \times W 24 \times H 24 mm | 0.086 lbs





Panel retainer

for glass 5-6 mm for panel max. 10 mm




M 1391.90

for 5 - 6 mm glass or max. 10 mm panels, assembly without tools, incl. rubber inserts and 1 \times hammerhead screw M 1470/Ha (M8) steel, zinc-plated/stainless steel | L 30 \times W 30 \times H 8 mm | 0.168 lbs







Fabric/Panel/Glass


Panel retainer

for glass 8-10 mm for panel max. 14 mm



M 1392.90

for 8 - 10 mm glass or max. 14 mm panels, assembly without tools, incl. rubber inserts and 1 \times hammerhead screw M 1475/Ha (M8) steel, zinc-plated/stainless steel | L 30 \times W 30 \times H 8 mm | 0.172 lba

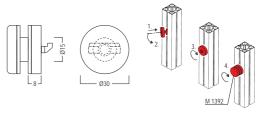

Glass panel retainer

for glass 4-6 mm L 5000 × W 16 × H 10 mm



E 424.30 | .35

for 4 - 6 mm panels plastic | L 5000 × W 16 × H 10 mm | 0.992 lbs





Glass panel retainer

for glass 4-8 mm L 5000 × W 16 × H 16.5 mm



E 420.30 | .33 | .35

for 4 - 8 mm panels plastic | L 5000 × W 16 × H 16.5 mm | 1.83 lbs





Glass retainer


for glass 8 mm L 38 × W 23 × H 52 mm





M 1445.39

for glass thickness 8 mm, for mounting to system groove 4.3 mm, with 1 \times hammerhead screw M 1470/Ha (M8)

zinc die cast | L 38 × W 23 × H 52 mm | 0.353 lbs







Glass retainer


for glass 10 mm L 45 × W 27.5 × H 63 mm





M 1447.39

for glass thickness 10 mm, for mounting to system groove 4.3 mm, with 1 \times hammerhead screw M 1470/Ha (M8)

zinc die cast | L 45 \times W 27.5 \times H 63 mm | 0.597 lbs







₹ maxima 120

Fabric/Panel/Glass

Glass retainer


for glass 12 mm L 45 × W 27.5 × H 63 mm



M 1467.39

for mounting to system groove 4.3 mm, for glass thickness 12 mm, with 1 × hammerhead screw M 1470/Ha (M8)

zinc die cast | L 45 × W 27.5 × H 63 mm | 0.584 lbs

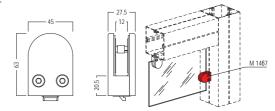

Hinges

Hinged flange plate


for 78 mm dia. for system groove 4.3 mm




M 1270.21

for all hinged end plates and hinged flange plates with 78 mm dia., for mounting to system groove 4.3 mm, incl. fixing screws and 1 \times anti–slipping device M 1299

steel | L 109 × W 78 × H 60 mm | 0.697 lbs





Hinged flange plate

for 78 dia. for system groove 4.3 mm




M 1271.21

for 78 dia., incl. 2 \times hammerhead screw M 1472 (M8) and 1 \times anti-slipping device M 1299

steel | L 102 × W 82 × H 82 mm | 1.16 lbs





Covering


for 78 mm dia. 1 pair



M 1278.35

1 pair, for all hinged end plates and hinged flange plates with 78 mm dia, incl. threaded steel rod M12 $\,$

plastic, light grey | L 25 \times W 80 \times H 80 mm | 0.313 lbs





Anti-slipping device


for 78 mm dia. L 70 × W 70 × H 0.6 mm




M 1299.33

self-adhesive paper for all hinged end plates and hinged flange plates with 78 mm dia.

paper, flocked | L70 × W70 × H0.6 mm |





Hinged set


for system groove 4.3 mm L 24 × W 24 × H 74 mm




M 1457.39

for mounting to system groove 4.3 mm, incl. 2 \times hammerhead bolt M 1142

steel | L 24 \times W 24 \times H 74 mm | 0.522 lbs





Electrical parts

Pendant light


1 illuminated side L 1000 × W 80 × H 80 mm



OL 3100.01 | .03

Set consisting of: 1 × upright L 1022-1000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 x 3.500 mm OL 466, 2 × wire rope retainer set L 222

aluminium | L 1000 × W 80 × H 80 mm | 9.052 lbs

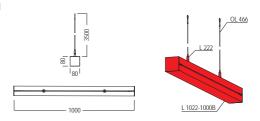

Pendant light


1 illuminated side L 2000 × W 80 × H 80 mm



OL 3200.01 | .03

Set consisting of: 1 × upright L 1022-2000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 × 3.500 mm OL 466, 2 × wire rope retainer set L 222

aluminium | L 2000 × W 80 × H 80 mm | 15.284 lbs

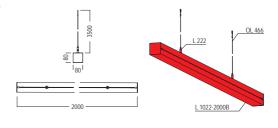

Pendant light


1 illuminated side L 3000 × W 80 × H 80 mm



OL 3300.01 | .03

Set consisting of: 1 × upright L 1022-3000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 x 3.500 mm OL 466, 2 × wire rope retainer set L 222

aluminium | L 3000 × W 80 × H 80 mm | 21.786 lbs

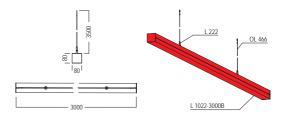

Wallwasher


LED / 28W / 230V L 812 × W 166 × H 263 mm



M 1497.31 | .33

for uniform illumination of 1000 mm width and 2500 mm height (5700 Kelvin > Cri 90, 3600 lm, 28 W, 125 lm/W), for 230 V power source, for system groove 4.3 mm, space-saving and securely packed, with 16 high-power LEDs, PSU incl. cable (500 mm to lamp and 2500 mm from power supply)

aluminium | L 812 × W 166 × H 263 mm | 4.5 lbs



Hanging lamp


LED / 56W / 230V L 818 × W 150 × H 35 mm



M 1497-H.33

for a homogenous illumination in 5700K > Cri 90, with 32 highpower LEDs, 7200 lm, 56 W, 128 lm/W, for 230 V, incl. 3.5 m wire rope with 2 × Reutlinger wire rope holders to adjust height, 2 × plastic end caps black, 1 × power supply unit incl. DC distributor, 3 m extension cable with DC connector


aluminium, matt powder-coated | L 818 \times W 150 \times H 35 mm | 5.489 lbs



Electrical parts


Power supply

for wallwasher M 1497 L 1175 × W 72 × H 35 mm



M 1497-11.90

for wallwasher M 1497, converter with 24V, 6.67A, 160W, rated voltage AC 100-240V, 50/60Hz, cable 1000 mm long plastic | L 1175 \times W 72 \times H 35 mm | 1.407 lbs



■ Attention: suitable power cord M 1497-12 is required

Cable

for wallwasher M 1497 2500 mm long



M 1497-12.90

for wallwasher M 1497, power cord CEE 7/7 - C13 plastic, black | 2500 mm long | 0.571 lbs




Extension cable

for wallwasher M 1497 3000 mm long



cable for connecting M 1497 wall-washers, with angled barrel connector at both ends $\,$

plastic, black | 3000 mm long | 0.282 lbs






PWM Dimmer

for wallwasher M 1497 L 150 × W 40 × H 20 mm



M 1497-4.90

1 × control unit and remote control for dimming of max. 5 wall-washer M 1497, DC 12-24 V, 2.4 GHz, PWM frequency 1.95 KHz plastic | L 150 × W 40 × H 20 mm | 0.227 lbs



Cable


Y-Splitter for wallwasher M 1497



M 1497-3.90

Y-cable for connecting up to 5 \times wallwasher M 1497, with barrel connector at all ends

plastic, black | 300 mm long | 0.09 lbs

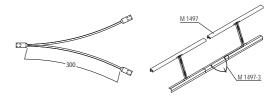

Electrical parts

Long-arm floodlight


25 W L 490 × W 232 × H 40 mm



M 1494.31 | .33

for swivel mounting in system groove, incl. adapter plate and connection cable 3 m, 25 W, 2500 lm, 4000 K, voltage input: 100-240 VAC, voltage output: 27-35 VDC, color rendering index: 80+ CRI, beam angle: 120°

aluminium | L 490 × W 232 × H 40 mm | 1.675 lbs





■ without connecting cable M 1494-xxxx


Connecting cable

for M 1494 1000 mm long



M 1494-1000.33

230V connecting cable for IEC C13 connections, one side plug, one side socket, can also be used as an extension rubber | 1000 mm long | 0.254 lbs





Weitere Abmessungen:

M 1494-2000.33 M 1494-3000.33 2000 mm lang 3000 mm lang 0.507 lbs 0.772 lbs


Long-arm floodlight


LED / 12W / 230V L 535 × W 119 × H 250 mm



M 1498.31

for voltage 100 - 230 V, for mounting in system groove 4.3 mm, 12 W / 230 V, 4000 K, 960 lm, incl. 1 × M 1481 retainer, 1 × cable 3000 mm, with integrated transformer and screwed on safety glass aluminium | L 535 × W 119 × H 250 mm | 1.354 lbs






Retainer


for long-arm floodlight M 1498 L 26 × W 35 × H 16 mm



M 1481.01

for installation in 4.3 mm system groove (extrusion top face) can be used in combination with long-arm spot light M 1480 / M 1499 aluminium | L 26 \times W 35 \times H 16 mm | 0.031 lbs





Electrical parts

Cable retaining


small for system groove 4.3 mm



E 460.35

small, for mounting of cables to system groove plastic, semi-hard | L 5000 \times W 16 \times H 20 mm | 1.609 lbs





Cable retaining


big for system groove 4.3 mm




E 463.35

big, for system groove 4.3 mm plastic, semi-hard | L 5000 \times W 30 \times H 30 mm | 2.634 lbs





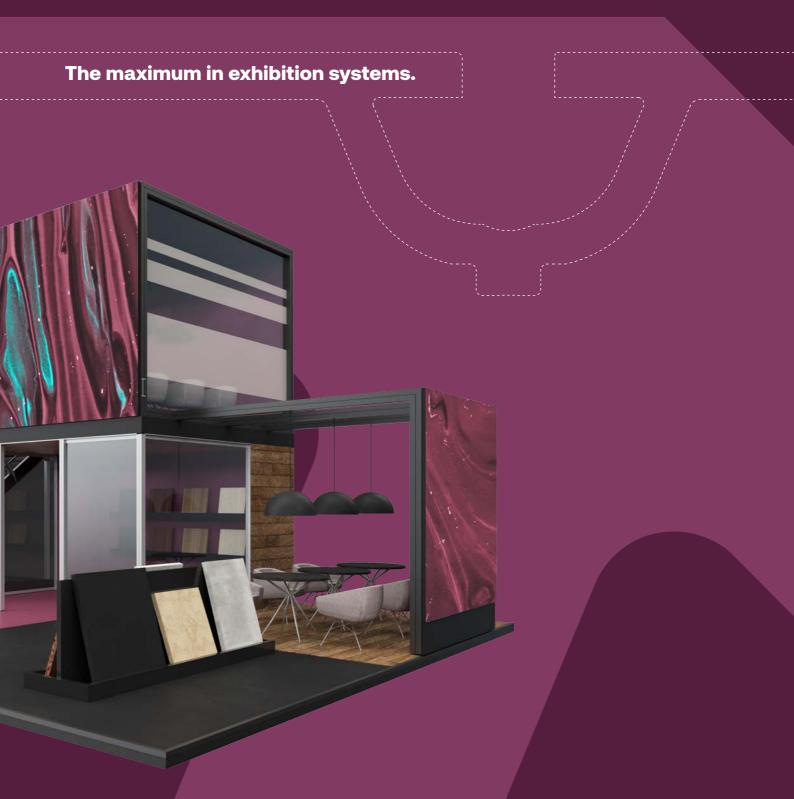

Index

VERVIEW
OMPONENTS
asic parts
ccessories


Overview

Basic parts






























































Basic parts


Square extrusion

4 system grooves L 5000 × W 60 × H 60 mm



M 1010.01

4 system grooves, adaptor M 1100 can be mounted aluminium | L 5000 \times W 60 \times H 60 mm | 17.93 lbs



Square extrusion


8 system grooves L 5000 × W 84 × H 84 mm



M 1017.01

8 system grooves, adaptors with tension lock M 1101, M 1103 can be mounted

aluminium | L 5000 × W 84 × H 84 mm | 26.565 lbs







Round extrusion


also as illumination element L 6000 × W 40 × H 40 mm



M 1201.01 | .20

for illumination element manufacturing, LED strip OL 685 is stuck to the outer surfaces, tension lock Z 961/8 can be mounted in 2 positions

aluminium | L 6000 \times W 40 \times H 40 mm | 11.574 lbs



Supporting beam


6 system grooves L 7000 × W 200 × H 40 mm



M 770.01

2 × tension lock Z 961/8 can be mounted in 2 positions or 3 × tension lock Z 961/13 with adaptor Z 161/A, with 6 system grooves aluminium | L 7000 × W 200 × H 40 mm | 78.336 lbs





■ Attention: Pay attention to lock direction.

Beam extrusion

L 5000 × W 80 × H 16 mm 5000 mm long



M 1320.01

 $2\times$ tension lock Z 961/13 can be mounted aluminium | L 5000 \times W 80 \times H 16 mm | 14.22 lbs



Basic parts

Rectangular extrusion

L 6000 × W 40 × H 28 mm 6000 mm long



M 1069.01

tension lock Z 961/8 can be mounted aluminium | L 6000 \times W 40 \times H 28 mm | 12.582 lbs




Rectangular extrusion

L 5000 × W 40 × H 80 mm 5000 mm long



M 1025.01

tension lock Z 961/8 can be mounted in 2 positions aluminium | L 5000 \times W 40 \times H 80 mm | 22.527 lbs




Rectangular extrusion

L 6000 × W 40 × H 80 mm 6000 mm long



M 1026.01

tension lock Z 961/8 can be mounted in 2 positions aluminium | L 6000 \times W 40 \times H 80 mm | 27.998 lbs




Rectangular extrusion


L 6000 × W 40 × H 80 mm 6000 mm long



M 1092.01

up to 2 tension locks Z 961/8 can be mounted aluminium | L 6000 \times W 40 \times H 80 mm | 32:181 lbs






Rectangular extrusion

L 6000 × W 40 × H 100 mm 6000 mm long



M 1029.01

aluminium | L 6000 \times W 40 \times H 100 mm | 26.191 lbs





Basic parts


Rectangular extrusion

L 6000 × W 40 × H 120 mm 6000 mm long



M 1031.01

tension lock Z 961/8 can be mounted in 2 positions aluminium | L 6000 \times W 40 \times H 120 mm | 39.826 lbs



Rectangular extrusion


L 6000 × W 60 × H 40 mm 6000 mm long



M 1082.01

tension lock Z 961/8 can be mounted in 2 positions, 6000 mm long

aluminium | L 6000 × W 60 × H 40 mm | 23.66 lbs




Rectangular extrusion


L 6930 × W 80 × H 160 mm 6930 mm long




M 1052.01

adaptor with tension lock M 1103 can be mounted aluminium | L 6930 \times W 80 \times H 160 mm | 62.492 lbs







Internal connector


straight for extrusions 60 × 60 mm




M 1064.01

straight, for all square extrustions 60 mm with length up to 999 mm, for vertical or hotizontal use, incl. $4 \times$ countersunk screw M 1064/20 (M5)

aluminium | L 320 × W 16 × H 42 mm | 0.679 lbs





Adaptor


with tension lock Z 961/13 for extrusions 60 × 60 mm




M 1100.00

for all square extrusions 60 mm, incl. 1 \times tension lock Z 961/13 and 2 \times countersunk screw M 1100/20 (M5)

aluminium | L 16 \times W 80 \times H 42 mm | 0.276 lbs





Basic parts

Adaptor


with Z 961/13 for extrusions 80 mm




M 1101.00

for all square and round extrusions 80 mm, incl. 1 \times tension lock Z 961/13, 1 \times collar guide M 1102/2 and 2 \times countersunk screw M 1100/20 (M5)

aluminium | L 80 × W 19 × H 57 mm | 0.317 lbs





Adaptor


with 2 × Z 961/13 for extrusions 80 mm




M 1103.00

for open square extrusions 80 mm, incl. 2 × tension lock Z 961/13, 2 × collar guide M t102/2 and 2 × countersunk screw M t100/20 (M5)

aluminium | $L80 \times W57 \times H57 \text{ mm}$ | 0.611 lbs





Adaptor


with 2 × Z 961/13 for M 1029




M 1128.01

for mounting in rectangular extrusion M 1029, incl. 2 \times tension lock Z 961/13 and fixing accessories M5

aluminium, matt anodized, silver | L 80 \times W 16 \times H 80 mm | 0.531 lbs





Tension lock

8 mm L 70 × W 20 × H 12 mm





Z 961/8.00

8 mm, for all beam extrusions with cross- or T-lock chamber 21 \times 12 mm

zinc die cast/steel | L 70 × W 20 × H 12 mm | 0.119 lbs







Tension lock

13 mm L 70 x W 21 x H 13 mm





Z 961/13.00

13 mm, for all beam extrusions with lock chamber 21 \times 12 mm as well as in conjunction with adaptor Z 161/A, for beam extrusions with lock chamber 39 \times 12 mm

zinc die cast/steel | L 70 × W 21 × H 13 mm | 0.115 lbs







Accessories

Adjustable foot


M8 for M 1025/M 1026




M 1086.37

for rectangular extrusion M 1025/M 1026 (40 \times 80 mm), thread M8 incl. 2 \times set screw M 1075/20 (M4)

steel | L 80 × W 40 × H 94 mm | 0.399 lbs





Adjustable foot


M8 for M 1030




M 1088.37

for rectangular extrusion M 1030, thread M8, incl. 2 \times set screw M 1075/20 (M4)

steel | L 120 × W 42 × H 94 mm | 0.522 lbs





Adjustable foot


M 10 for extrusions 60 × 60 mm




M 1067.37

for extrusions 60 \times 60 mm, thread M10, incl. 2 \times set srew M 1075/20 (M4)

steel | L 62 × W 62 × H 74 mm | 0.52 lbs





End plate

3 mm thick for M 1029



M 1083.21

for rectangular extrusion M 1029, 3 mm thick steel | L 100 \times W 40 \times H 3 mm | 0.218 lbs



Adjustable foot


M10 for M 1052




M 1098.37

for rectangular extrusion M 1052, thread M10, incl. 2 \times set screw M 1075/20 (M4)

steel | L 162 × W 82 × H 74 mm | 1.173 lbs





Accessories

End plate


for M 1025 L 40.3 × W 80.3 × H 3 mm




M 1085.21

for rectangular extrusions M 1025 (40 \times 80 mm), incl. 2 \times set screw M 1075/20 (M4)

steel | L 40.3 × W 80.3 × H 3 mm | 0.176 lbs






End plate


for M 1031 L 40 × W 120 × H 3 mm



M 1087.21

for rectangular extrusion M 1031, incl. 2 \times set screw M 1075/20 (M4) steel | L 40 \times W 120 \times H 3 mm | 0.265 lbs






End plate


for extrusion M 1010 L 60.5 × B 60.5 × H 3 mm



M 1065.21

for square extrusion M 1010, incl. 2 \times set srew M 1075/20 (M4) steel | L 60.5 \times B 60.5 \times H 3 mm | 0.198 lbs





End plate


for M 1052 L 160.5 × W 80.5 × H 3 mm




M 1097.21

for rectangular extrusion M 1052, incl. 2 \times set screw M 1075/20 (M4)

steel | L 160.5 \times W 80.5 \times H 3 mm | 0.69 lbs







octalux 80 mm

Illuminated extrusions with a system.



Index


→ TECHNICAL FEATURES	164
□ □ □ □ □ □ □	166
尽 COMPONENTS	
→ Basic parts →	168
→ Accessories	172
¬ Safety parts	174
	177
→ Packing/Transport → Pa	179
7 Sets	180




product

brochure



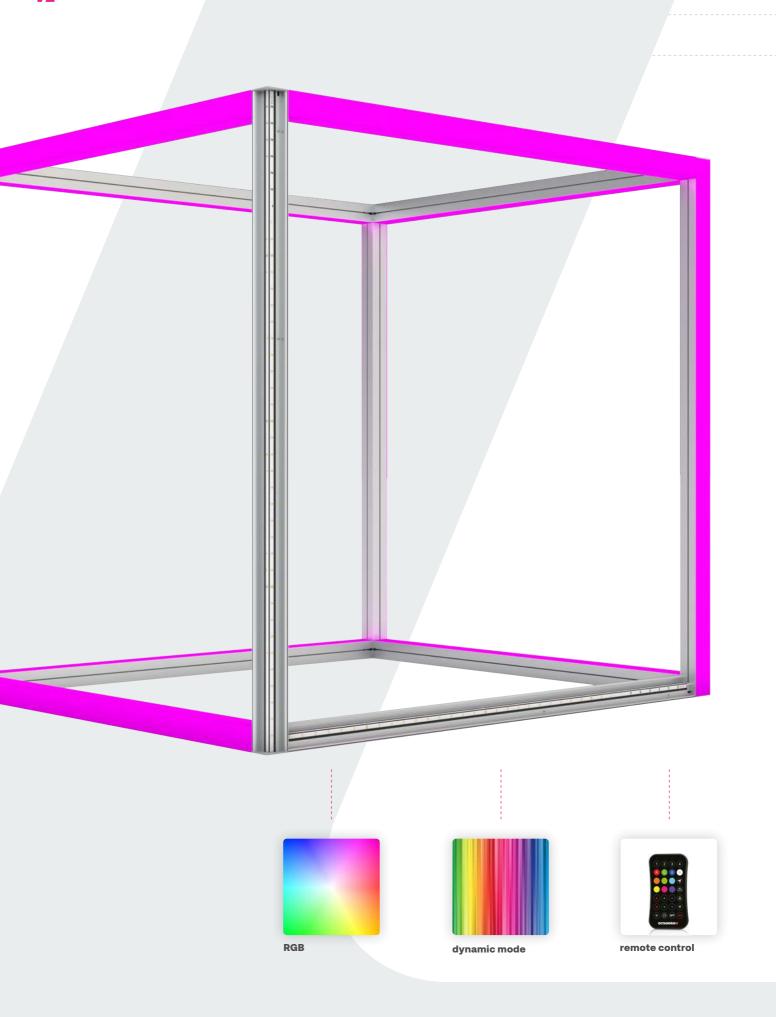

Technical features

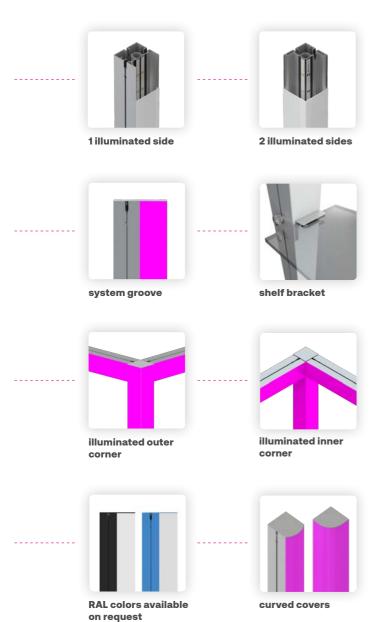

Ready for new designs.

From illuminated uprights and beams to light strips and outlines of three-dimensional structures all throughout the presentation area: The interplay of illuminated extrusions and corners allows for the creation of individual shapes without interruptions. **octalux** opens up new design worlds and ways of captivating and directing the visitor's focus.

Attractive. Individual. Colorful.

octalux is equipped with COB (chip-on-board) LEDs that are characterized by high luminosity and can be conveniently adjusted by remote control. The full RGB spectrum of 16.8 million color shades illuminates the system: dimmed or bright, in one color or alternating in dynamic mode, always in keeping with the design and requirements. This guarantees full control – at all times.

octalux - a plus for several octanorm systems.

A new feature that upgrades existing systems. The basic extrusion is equipped with the tried and tested 4.3 mm **octanorm** system groove on the non-illuminated sides. This means it can be ideally combined with **octawall pro**, **maxima** and **octalumina**, but also with **octawall 40** and the **octanorm** beam extrusions. A real added value for every designer.

Overview


















































































Overview













Packing/Transport















Basic parts

Upright


with illumination 90°, 2 illuminated sides



L 1020-5000B.01 | .03

with 2 illuminated sides for 90° illumination, 1 × upright extrusion made of L 1020 with 1 × acrylic cover L 1021, incl. COB LED strips RGB, 2 × end cap L 1024, cabling, 1 × power supply unit (input 100–120 VAC or 200–240 VAC), 1 × controller for color changing and dimming, CE certified

aluminium | L 80 \times W 80 \times H 5000 mm | 31.213 lbs

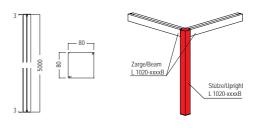

Weitere Abmessungen:

L 1020-1000B.01 | .03 L 1020-1500B.01 | .03 L 1020-2000B.01 | .03 L 1020-2500B.01 | .03 L 1020-3000B.01 | .03 L 1020-3500B.01 | .03 L 1020-4000B.01 | .03 L 1020-4500B.01 | .03

L 80 × B 80 × H 1000 mm 8.75 lbs L 80 × B 80 × H 1500 mm 10.6 lbs L 80 × B 80 × H 2000 mm 13.422 lbs L 80 × B 80 × H 2500 mm 16.217 lbs L 80 × B 80 × H 3000 mm 19.442 lbs L 80 × B 80 × H 3500 mm 21.973 lbs L 80 × B 80 × H 4000 mm 25.183 lbs L 80 × B 80 × H 4500 mm 27.542 lbs

▼ remote controller L 185-2 not included

Upright


with illumination 90°, inner corner




L 1030-5000B.01 | .03

with 2 illuminated sides for 90°, illumination, 1 × upright extrusion made of L 1020 with 1 × acrylic cover L 1021, 2 × adaptor L 108, incl. COB LED strips RGB, 2 × end cap L 1024, cabling, 1 × power supply unit (input 100–120 VAC or 200–240 VAC), 1 × controller for color changing and dimming, CE certified

aluminium | L 80 × W 80 × H 5000 mm | 33.79 lbs





Weitere Abmessungen:

L 1030-1000B.01 | .03 L 1030-1500B.01 | .03 L 1030-2000B.01 | .03 L 1030-2500B.01 | .03 L 1030-3000B.01 | .03 L 1030-3500B.01 | .03 L 1030-4000B.01 | .03 L 1030-4500B.01 | .03

L 80 × B 80 × H 1000 mm 10.24 lbs L 80 × B 80 × H 1500 mm 12.081 lbs L 80 × B 80 × H 2000 mm 14.782 lbs L 80 × B 80 × H 2500 mm 18.77 lbs L 80 × B 80 × H 3000 mm 20.415 lbs 23.858 lbs L 80 × B 80 × H 3500 mm L 80 × B 80 × H 4000 mm 26.014 lbs L 80 × B 80 × H 4500 mm 28.944 lbs

▼ remote controller L 185-2 not included

Basic parts

Upright


with illumination 1 illuminated side



L 1022-5000B.01 | .03

with 1 illuminated side, 1 × upright extrusion made of L 1022 with 1 × acrylic cover L 1023, incl. COB LED strips RGB, 2 × end cap L 1024, cabling, 1 × power supply unit (input 100–120 VAC or 200–240 VAC), 1 × controller and remote control for color changing and dimming, CE certified

aluminium | L 80 × W 80 × H 5000 mm | 33.578 lbs



Weitere Abmessungen:

L 1022-1000B.01 | .03 L 1022-1500B.01 | .03 L 1022-2000B.01 | .03 L 1022-2500B.01 | .03 L 1022-3000B.01 | .03 L 1022-3500B.01 | .03 L 1022-4000B.01 | .03 L 1022-4500B.01 | .03

L 80 × B 80 × H 1000 mm 8 113 lbs L 80 × B 80 × H 1500 mm 11.281 lbs L 80 × B 80 × H 2000 mm 14.345 lbs L 80 × B 80 × H 2500 mm 17.374 lbs L 80 × B 80 × H 3000 mm 20.847 lbs L 80 × B 80 × H 3500 mm 23.62 lbs L 80 × B 80 × H 4000 mm 27.066 lbs L 80 × B 80 × H 4500 mm 30.11 lbs

▼ remote controller L 185-2 not included

Upright


with illumination inner corner




L 1032-5000B.01 | .03

with 1 illuminated side, 1 × upright extrusion made of L 1022 with 1 × acrylic cover L 1023, 2 × adaptor L 109, incl. COB LED strips RGB, 2 × end cap L 1024, cabling, 1 × power supply unit (input 100–120 VAC or 200–240 VAC), 1 × controller for color changing and dimming, CE certified

aluminium | L 80 \times W 80 \times H 5000 mm | 33.757 lbs





Zarge/Beam

L 1022-xxxxB

Stütze/Upright L 1022-xxxxB

Weitere Abmessungen:

L 1032-1000B.01 | .03 L 1032-1500B.01 | .03 L 1032-2000B.01 | .03 L 1032-2500B.01 | .03 L 1032-3000B.01 | .03 L 1032-3500B.01 | .03 L 1032-4000B.01 | .03 L 1032-4500B.01 | .03

L 80 × B 80 × H 1000 mm 9.515 lbs L 80 × B 80 × H 1500 mm 11.409 lbs L 80 × B 80 × H 2000 mm 14.191 lbs L 80 × B 80 × H 2500 mm 18.294 lbs L 80 × B 80 × H 3000 mm 19.987 lbs 23.53 lbs L 80 × B 80 × H 3500 mm L 80 × B 80 × H 4000 mm 26.872 lbs L 80 × B 80 × H 4500 mm 28.763 lbs

▼ remote controller L 185-2 not included

7 octalux

Basic parts


Beam

with illumination 90°, 2 illuminated sides

L 1020-4840B.01 | .03

with 2 illuminated sides for 90° illumination, 1 × upright extrusion made of L 1020 with 1 × acrylic cover L 1021, incl. COB LED strips RGB, 2 × tension lock Z 961/8, cabling, 1 × power supply unit (input 100–120 VAC or 200–240 VAC), 1 × controller for color changing and dimming, CE certified

aluminium | L 4840 \times W 80 \times H 80 mm | 31.028 lbs

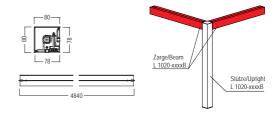

Weitere Abmessungen:

L 1020-840B.01 | .03 L 1020-1840B.01 | .03

L 1020-2840B.01 | .03

L 1020-3840B.01 | .03

L 840 × B 80 × H 80 mm L 1840 × B 80 × H 80 mm L 2840 × B 80 × H 80 mm L 3840 × B 80 × H 80 mm 6.808 lbs 13.239 lbs 19.259 lbs 25.005 lbs

▼ remote controller L 185-2 not included

Beam


with illumination 1 illuminated side



L 1022-4840B.01 | .03

with 1 illuminated side, 1 \times beam extrusion made of L 1022 with 1 \times acrylic cover L 1023, incl. COB LED strips RGB, 2 \times tension lock Z 961/8, cabling, 1 \times power supply unit (input 100–120 VAC or 200–240 VAC), 1 \times controller and remote control for color changing and dimming, CE certified

aluminium | L 4840 \times W 80 \times H 80 mm | 33.395 lbs

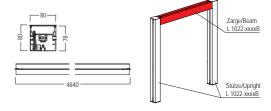



L 1022-840B.01 | .03

L 1022-1840B.01 | .03

L 1022-2840B.01 | .03

L 1022-3840B.01 | .03

L 840 × B 80 × H 80 mm L 1840 × B 80 × H 80 mm L 2840 × B 80 × H 80 mm L 3840 × B 80 × H 80 mm 7.224 lbs 14.204 lbs 20.708 lbs 26.043 lbs

▼ remote controller L 185-2 not included

Covering


for L 1020 for 2 illuminated sides



L 1021.50

for extrusion L 1020, 2 illuminated sides for 90° illumination, especially for COB-LEDs L 100, L 104 and L 106 from the OCTAlux product line

polycarbonate, translucent | L 6000 × W 80 × H 80 mm | 4.987 lbs

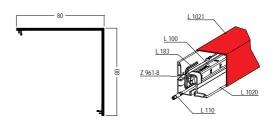

Basic parts

Covering


for L 1022 for 1 illuminated side



L 1023.50

for extrusion L 1022, 1 illuminated side, especially for COB-LEDs L 100, L 104 and L 106 from the OCTAlux product line

polycarbonate, translucent | L 6000 × W 80 × H 8.5 mm | 2.866 lbs

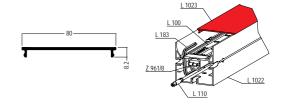

Covering

round for L 1020




L 1041.50

translucent, rounded, for extrusion L 1020, in combination with end cap L 1044 $\,$

polycarbonate, translucent | L 6000 × W 80 × H 80 mm | 4.118 l lbs





Covering

round for L 1022




L 1043.50

translucent, rounded, for extrusion L 1022, in combination with end cap L 1045 $\,$

polycarbonate, translucent | L 6000 × W 80 × H 17 mm | 3.38 lbs





Adaptor


with Z 961/13 for extrusions 80 mm




M 1101.00

for all square and round extrusions 80 mm, incl. 1 × tension lock Z 961/13, 1 × collar guide M 1102/2 and 2 × countersunk screw M 1100/20 (M5)

aluminium | L 80 × W 19 × H 57 mm | 0.317 lbs





Tension lock


8 mm L 70 × W 20 × H 12 mm




Z 961/8.00

8 mm, for all beam extrusions with cross- or T-lock chamber 21 \times 12 mm

zinc die cast/steel | L 70 \times W 20 \times H 12 mm | 0.119 lbs





Accessories

Adjustable foot


M10 L 60 × W 60 × H 75 mm




W 2850.37

M10 thread, to adjust height of frames/extrusions from the top with hex-star T30 $\,$

steel | L 60 × W 60 × H 75 mm | 0.249 lbs






Threaded plug


M10 L 35 × W 21 × H 12 mm



S 137/K.00

for lock chamber 21 x 12 mm, with thread M10 aluminium \mid L 35 x W 21 x H 12 mm \mid 0.035 lbs





Base plate


for upright extrusions L 320 × W 120 × H 212 mm




M 1408.21

for upright extrusions M 1000 / S 108..., incl. supporting peg M 1408/2, 1 \times countersunk screw eZ5030/20 (M10) and 1 \times hex-star screw E 111/m (M6)

steel | L 320 \times W 120 \times H 212 mm | 6.186 lbs





Base plate


side L 495 × W 170 × H 301 mm




M 1941.21

for free standing frames made of extrusions M 1304, M 1305, M 1307, W 906, for side mounting and additional connecting to bottom beam, incl. 1 \times mounting parts M 1951BS, max. frame height = 2000 mm

steel | L 495 × W 170 × H 301 mm | 11.768 lbs





Suitable for both left and right side


End cap

square for L 1020/L1022



L 1024.33 | .35


for extrusions L 1020 and L 1022, with perforated fracture for use with adjustable foot W 2850 and threaded plug S 137/K polycarbonate | L 80 \times W 80 \times H 3 mm | 0.053 lbs

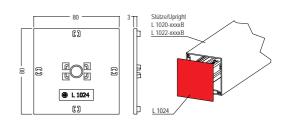

Accessories


End cap


rounded for L 1020



L 1044.33 | .35

rounded, for extrusion L 1020, in combination with cover L 1041 plastic | L 80 \times W 80 \times H 3 mm | 0.04 lbs






End cap


rounded for L 1022



L 1045.33 | .35

rounded, for extrusion L 1022, in combination with cover L 1043 plastic | L 95 \times W 80 \times H 3 mm | 0.051 lbs





Internal connector


straight L 180 × W 21 × H 12 mm




L 240.00

for longitudinal connection of two OCTAlux frames with lock chamber 21 \times 12 mm, consisting of: 1 \times connection part straight OL 240–1, 2 \times set screw M6x45 N 00002

aluminium/steel | L 180 × W 21 × H 12 mm | 0.295 lbs





- Joining point must be relieved. Please refer to technical information TI-L-1.0.
- 7 To connect two beams with L 240, tension locks have to be removed

Bracket


for 8 mm shelves L 150 × W 77 × H 63.5 mm




L 10.21 | .33

for screwing onto uprights 80 mm, variable height adjustment, consisting of left and right bracket, for glass and wood shelves 8 mm, for max. depth 300 mm

steel | L 150 × W 77 × H 63.5 mm | 0.723 lbs





- Attention: max. load with even weight distribution = 20 kg
- Shelf length (L) = clear width (CW) -16 mm

Safety parts

Beam retainer


with set screw M 1105/20 L 75 × W 52 × H 16 mm



M 1105.00

2 parts, for mounting to system groove 4.3 mm, incl. 1 \times set screw M t105/20 (M4)

aluminium | L 75 × W 52 × H 16 mm | 0.128 lbs





→ Attention: Beam retainer has to be used for safety reasons

Reinforcement


with 3 × M 1435/70 L 102.6 × W 8 × H 102.6 mm



M 1129.37

for system groove 4.3 mm, incl. 3 \times set screw M 1435/70 (M8) and 2 \times round head screw with flange M 1557/20 (M6)

steel | L 102.6 × W 8 × H 102.6 mm | 0.829 lbs

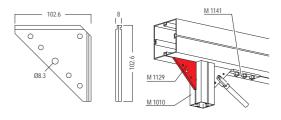

Reinforcement


with 2 × M 1435/70 L 67.6 × W 8 × H 67.6 mm



M 1150.37

for system groove 4.3 mm, incl. 2 × set screw M 1435/70 (M8) and 2 × round head screw with flange M 1557/20 (M6)

steel | L 67.6 × W 8 × H 67.6 mm | 0.452 lbs

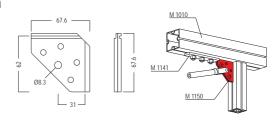

Reinforcement


with 4 × M 1435/70 L 300 × W 8 × H 300 mm




M 1139.37

for system groove 4.3 mm, incl. 4 × set screw M 1435/70 (M8) and 4 × round head screw with flange M 1557/20 (M6)

steel | L 300 × W 8 × H 300 mm | 4.361 lbs





Reinforcing plate

with 6 × M 1473 L 240 × W 240 × H 6 mm





M 1164.21

for extrusions 80 \times 80 mm, incl. 6 \times hammerhead screw M 1473 (M8)

steel | L 240 \times W 240 \times H 6 mm | 3.384 lbs

■ Attention: item has to be used for safety reasons as "beam retainer"





Safety parts

Corner bracing


for L 1020 / L 1022 L 144 × W 84 × H 58 mm



L 15.21 | .23

multi-part corner reinforcement for stabilizing frames and cubes made of OCTAlux profiles L 1020 / L 1022, incl. 8 \times hammerhead screw (M8) M 1472 and 8 \times nut cap black L 16-M8-1 (only for color 23 black)

steel | L 144 × W 84 × H 58 mm | 1.402 lbs

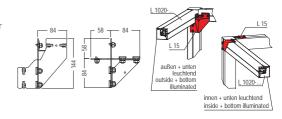

Connector part


max. 150 kg for rope suspension




M 1172.37

usable for rope suspension, for connection to 4.3 mm system groove, incl. $3\times$ set screw M 1435/70 (M8) and $2\times$ lenticular flange head screw M 1557/20 (M6), max. load capacity 150 kg

steel | L 136 × W 66 × H 50 mm | 1.182 lbs





■ Attention: max. load capacity 150 kg

Connector part

max. 100 kg for rope suspension




M 1174.37

usable for rope suspension, for connection to 4.3 mm system groove, incl. 2 × set screw M 1435/70 (M8) and 2 × lenticular flange head screw M 1557/20 (M6), max. load capacity 100 kg

steel | L 76 × W 66 × H 8 mm | 0.562 lbs







■ Attention: max. load capacity 100 kg

Connector part


incl. 2 × M 1435/70 L 50 × W 56 × H 40 mm



M 1435.00

for system groove 4.3 mm, incl. 2 × set screw M 1435/70 (M8), 1 × M1435/20 hex bolt, 1 × M 1435/30 hex nut, 2 × M 1435/40 washer (M8)

aluminium | L 50 \times W 56 \times H 40 mm | 0.143 lbs



→ Attention: max. load capacity 70 kg

Screw eye


max. 35 kg Opening 20 mm dia.



M 1233.37

for system groove 4.3 mm, opening 20 mm dia., consists of 1 × hammer head screw (M8) M 1470/Ha and 1 × eye nut (M8) M 1401/21

steel | L 36 \times W 20 \times H 36 mm | 0.134 lbs



nax. load capacity 35 kg

Safety parts

Wire rope retainer set

for suspension L 56 × W 24 × H 24 mm




L 222.39

for securing suspended extrusion structures made of OCTAlux extrusions, consisting of: 1 × wire rope retainer OL 222-oZ, 1 × washer M 1135-40, 1 × hammerhead screw W 474-Ha, for steel ropes galv.7×7, min 2300 N/mm², Ø1.5, Ø1.8, Ø2.0, Ø2.5, without steel ropes

steel | L 56 \times W 24 \times H 24 mm | 0.088 lbs



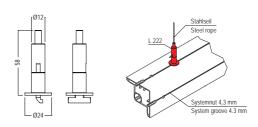

Electrical parts

Power cable


2000 mm long



L 202.33

Power supply cable, socket - SchuKo plug, number of poles 2, rated voltage 250 V, rated current 10 A, cable type H05VV-F, nominal cross-section of wire 1.5 $\,\mathrm{mm^2}$

plastic | 2000 mm long | 0.289 lbs

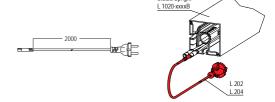

Stütze/Upright

Power cable


4000 mm long



L 204.33

Power supply cable, socket - SchuKo plug, number of poles 2, rated voltage 250 V, rated current 10 A, cable type H05VV-F, nominal cross-section of wire 1.5 $\rm mm^2$

plastic | 4000 mm long | 0.503 lbs

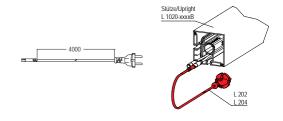

Connecting cable


Socket-Socket 200 mm long



L 115.33

230 V, 2-wire, for electrical connection of two OCTAlux beams (plugs) $\,$

plastic | 200 mm long | 0.035 lbs

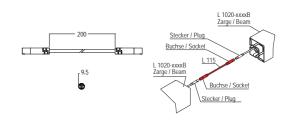

Not suitable for electrical connection of two OCTAlux uprights (sockets)


Cable protection


for L 1020/L 1022 L 23 × W 12 × H 9.5 mm



L 1025.33 | .35

for extrusions L 1020 and L 1022, to protect cables from damage caused by sharp-edged cutouts, from the OCTAlux series plastic | L 23 \times W 12 \times H 9.5 mm |






Cable protection


for L 1020/L 1022 L 15 × W 7.2 × H 4.1 mm



L 1026.33 | .35

for extrusions L 1020 and L 1022, to protect cables from damage caused by sharp-edged cutouts, from the OCTAlux series plastic | L 15 \times W 7.2 \times H 4.1 mm |





Electrical parts

Dimmer RGB


for OCTAlux L 110 × W 30 × H 17 mm




L 185-1.90

Control unit for colour selection and dimming of OCTAlux products, can be integrated into extrusions L 1020 and L 1022, can be controlled with remote control L 185-2, Input voltage: 12 - 24 VDC, Input Current: 12 A, Input signal: RF 2,4 GHz

plastic | L 110 \times W 30 \times H 17 mm | 0.165 lbs





Remote control RGB


for L 185-1 L 107 × W 59 × H 9.5 mm




L 185-2.90

Ultra-thin RGB/RGBW HF remote control, for controlling OCTAlux products with built-in L 185-1 control unit, Output signal: RF (2.4 GHZ), Operating voltage: 3VDC (CR2032), Operating current: <5 mA, incl. OL 182B button cell (CR2032)

plastic | L 107 x B 59 x H 10 mm | 0.106 lbs





Battery


CR 2032 for L 185-2



OL 182B.90

Lithium button cell 3V, battery CR 2032, 3V for RGB remote control L 185-2 $\,$

lithium | L 20 \times W 20 \times H 3,2 mm | 0.007 lbs



Packing/Transport

Transport box


for L 2020 L 2090 × W 520 × H 520 mm




L 520.90

for OCTAlux Structure Set L 2020, 7 mm plywood, film/film, dark brown phenolic film, no claim to colour shade, 2 \times folding handle, 2 \times butterfly catch, lid with foam lining, 4 \times swivel castor with stop, internal dimensions: L 2050 \times W 480 \times H 360 mm

plastic/aluminium | L 2090 \times W 520 \times H 520 mm | 95.9 lbs





Transport box


for L 2520 L 2590 × W 520 × H 520 mm



L 525.90

for OCTAlux Structure Set L 2520, 7 mm plywood, film/film, dark brown phenolic film, no claim to colour shade, 2 × folding handle, 2 × butterfly catch, lid with foam lining, 4 × swivel castor with stop, internal dimensions: L 2550 × W 480 × H 360 mm

plastic/aluminium | L 2590 × W 520 × H 520 mm | 119.048 lbs





Transport box


for L 3030 L 3090 × W 520 × H 520 mm



L 530.90

for OCTAlux Structure Set L 3030, 7 mm plywood, film/film, dark brown phenolic film, no claim to colour shade, 2 \times folding handle, 2 \times butterfly catch, lid with foam lining, 4 \times swivel castor with stop, internal dimensions: L 3050 \times W 480 \times H 360 mm

plastic/aluminium | L 3090 × W 520 × H 520 mm | 136.685 lbs





Sets

Structure Set


made of OCTAlux



L 2020.01 | .03

made of OCTAlux, Set consisting of: 4 × upright L 1020-2000B, 4 × L 2000 x W 2000 x H 2000 mm | beam L 1024-1840B, 4 x corner reinforcement, 3-part L 15, 1 x RGB remote control L 185-2, 1 \times power cable L 204, 1 \times mounting tool E 13, 1 \times transport box L 520, 54 \times foam pad L 898

aluminium | L 2000 × W 2000 × H 2000 mm | 213.676 lbs

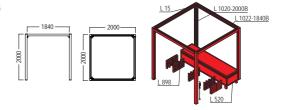

Structure Set


made of OCTAlux L 2000 × W 2000 × H 2500 mm



L 2520.01 | .03

made of OCTAlux, set consisting of: 4 \times upright L 1020-2500B, 4 \times beam L 1022-1840B, 4 × corner reinforcement, 3-part L 15, 1 × RGB remote control L 185-2, $1 \times$ power cable L 204, $1 \times$ mounting tool E 13, $1 \times$ transport box L 525, $54 \times$ foam pad L 898

aluminium | L 2000 × W 2000 × H 2500 mm | 248.006 lbs

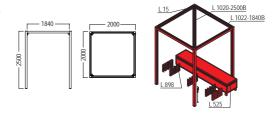

Structure Set


made of OCTAlux L 3000 × W 3000 × H 3000 mm



L 3030.01 | .03


made of OCTAlux, set consisting of: 4 \times upright L 1020-3000B, 4 \times beam L 1022-2840B, 4 × corner reinforcement, 3-part L 15, 1 × RGB remote control L 185-2, 1 \times power cable L 204, 1 \times mounting tool E $13, 1 \times \text{transport box L } 530, 54 \times \text{foam pad L } 898$

aluminium | L 3000 × W 3000 × H 3000 mm | 304.559 lbs

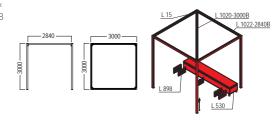

₹ octalux


Tension fabric frames with a system.

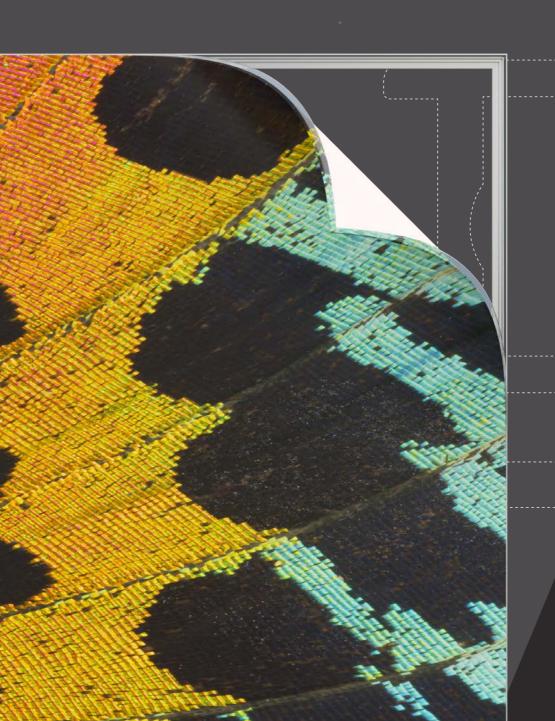

Index

7 TECHNICAL FEATU	RES	184
↗ OVERVIEW		186
7 COMPONENTS		
→ Basic parts		189
z Accessories		199



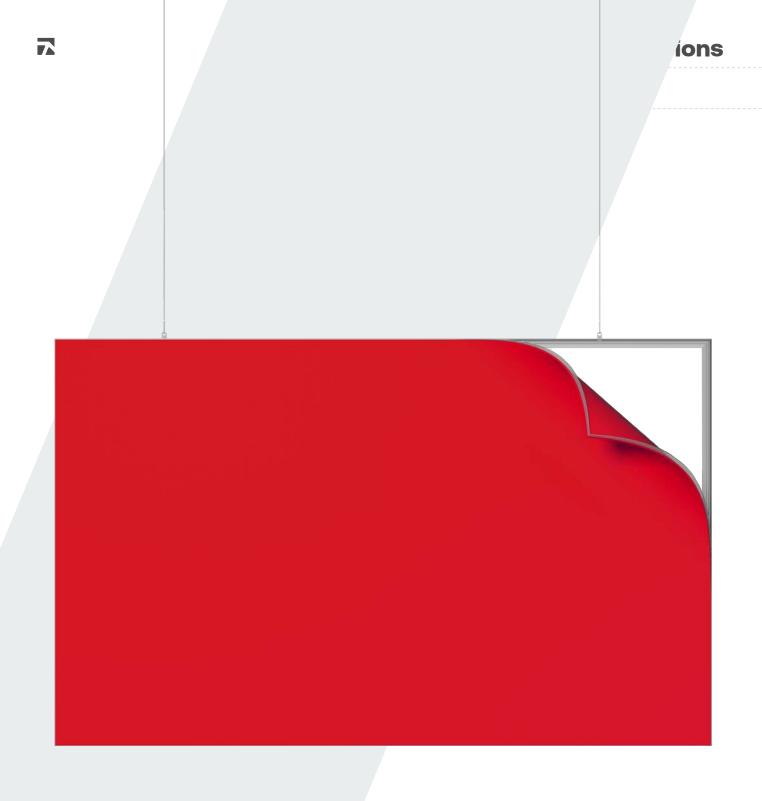

Technical features





different extrusion depths

various frame color



2 mm extrusion edge



illumination optional



silicone edge technology

Different extrusion depths. For all requirements.

Our tension fabric frames are available with extrusion depths from 16–120 mm. They can be powder-coated in various RAL colors on request – for every spatial requirement and color coordination.

Simple and flexible. With silicone edges.

The fabric is fixed into the fabric groove with a silicone edge. This allows for a quick and tool-less exchange of any graphic.


Extrusion edges. Almost invisible.

Our anodized aluminium frames take a subsidiary role and put your product into the spotlight. There is merely a 2 mm extrusion edge framing the fabric.

A shining example. Also in quality.

Our high quality light frames are fitted with Power LEDs, which ensure a brilliant, radiating light. Additional advantages: their longevity and energy efficiency.

Overview

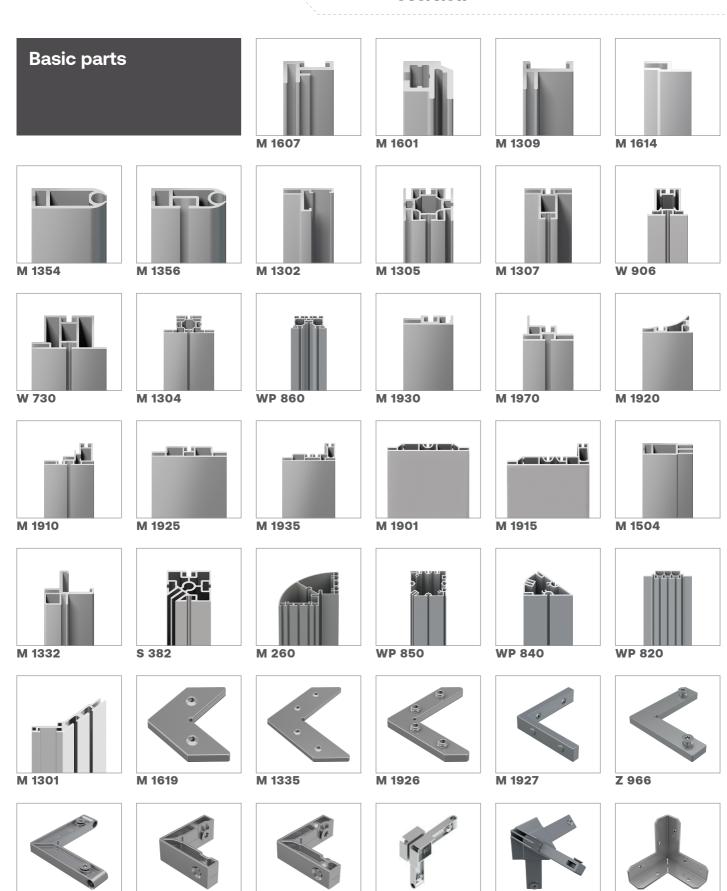

Z 990

Z 965B

M 1965B

W 916

M 1535

M 1334

Overview



M 1494

M 1494-1000

M 1498

M 1433

M 1434

M 1339

Overview



M 1313

Basic parts

Tension fabric extr.


up to DIN A1 fabric




M 1607.01

for small formats up to DIN A1 (594 x 841 mm), for mounting fabric with silicone edge M 1313 $\,$

aluminium | L 6000 \times W 16 \times H 24 mm | 4.22 lbs





Tension fabric extr.


up to DIN A1 fabric




M 1601.01

for small formats up to DIN A1 (594 x 841 mm), for mounting fabric with silicone edge M 1313 $\,$

aluminium | L 6000 × W 20 × H 16 mm | 4.755 lbs





Tension fabric extr.


up to DIN A0 for wall fixing




M 1309.01

for wall fixing for small formats up to DIN A0 (841 x 1189 mm), for mounting fabric with silicone edge M 1313 $\,$

aluminium | L 6000 \times W 22.5 \times H 27 mm | 5.584 lbs





Tension fabric extr.


for fixing to wood fabric



M 1614.00

for fixing to wooden elements, for mounting fabric with silicone edge M 1313, delivery condition unpunched

aluminium | L 6000 \times W 28 \times H 10 mm | 3.395 lbs



Fabric suspension extr.


for round keder 4-6 mm dia.



M 1354.01

1 system groove, for digitally printed graphics, with round keder 4-6 mm dia.

aluminium | L 5000 \times W 40 \times H 16 mm | 7.011 lbs





Basic parts

Fabric suspension extr.


for round keder 4-6 mm dia.




M 1356.01

 $2\ \mbox{system}$ grooves, for digitally printed graphics, with round keder 4–6 mm dia.

aluminium | L 5000 × W 40 × H 16 mm | 7.046 lbs





Tension fabric extr.


fabric L 6000 × W 40 × H 28 mm



M 1302.01

to fix fabric panels in connection with silicone edge M 1313, bracing available

aluminium | L 6000 × W 40 × H 28 mm | 7.696 lbs






Tension fabric extr.


for double sided fabric L 6000 × W 40 × H 40 mm



M 1305.01

for double sided fabric (with silicone edge M 1313), with 4 grooves to fix fabric, tension lock Z 961/8 can be mounted in 2 positions aluminium | L 6000 \times W 40 \times H 40 mm | 18:153 lbs






Tension fabric extr.


for double-sided fabric L 6000 × W 40 × H 40 mm



M 1307.01

for double-sided fabric (with silicone edge M 1313) aluminium | L $6000 \times W 40 \times H 40 \text{ mm}$ | 11.887 lbs





Tension fabric extr.


for double sided fabric / panel L 6000 × W 40 × H 40 mm




W 906.01

for double-sided fabric (in combination with silicone edge M 1313) or panels

aluminium | L 6000 × W 40 × H 40 mm | 13.988 lbs





Basic parts

Tension fabric extr.


L 6000 × W 60 × H 40 mm



W 730.01

to fix fabric panels to one side with silicone welt M 1313, and to fix wood panel to one side in connection with hook tape W 920 and loop tape W 921

aluminium | L 6000 × W 60 × H 40 mm | 19.092 lbs






Tension fabric extr.


single or double sided fabric



M 1304.01

for single- or double-sided fabric (with silicone edge M 1313) aluminium | L $6000 \times W 80 \times H 40 \text{ mm}$ | 22.368 lbs





Frame extrusion


for double sided fabric / panel L 6000 × W 80 × H 40 mm



WP 860.01

for mounting either fabric (with silicone edge M 1313) or panels (with hook tape W 840 and loop tape W 841)

aluminium | L 6000 \times W 80 \times H 40 mm | 26.274 lbs





Tension fabric extr.

without system groove for single-sided illumination




M 1930.01


to be ordered separately

for light frames with single sided illumination, without system groove, graphics with silicone edge M 1313 $\,$

■ Hook tape W 840 and loop tape W 841 (for mounting panels) have

aluminium | L 6000 \times W 40 \times H 11 mm | 7.518 lbs





Tension fabric extr.


with system groove for single-sided illumination




M 1970.01

for light frames with single-sided illumination, with system groove, graphics with silicone edge M 1313 $\,$

aluminium | L 6000 \times W 40 \times H 29 mm | 9.57 lbs





Basic parts

Tension fabric extr.


for single-sided illumination for wall mounting, for light frames with silicone edge M 1313



M 1920.01

for wall mounting, for light frames with single sided tension fabric, araphics with silicone edge M 1313

aluminium | L 6000 × W 60 × H 30 mm | 13.386 lbs





Tension fabric extr.


60 mm, without system groove for single-sided illumination




M 1910.01

for single-sided illumination, without system groove, graphics with silicone edge M $1313\,$

aluminium | L 6000 × W 60 × H 38 mm | 16.808 lbs





Tension fabric extr.


80 mm, without system groove for double-sided illumination




M 1925.01

for double-sided illumination, without system groove, graphics with silicone edge M 1313 $\,$

aluminium | L 6000 \times W 80 \times H 16 mm | 14.431 lbs





Tension fabric extr.


without system groove for single-sided illumination




M 1935.01

for single-sided illumination, without system groove, graphics with silicone edge M 1313 $\,$

aluminium | L 6000 \times W 80 \times H 40 mm | 21.109 lbs





Tension fabric extr.


w/o system groove for double-sided illumination




M 1901.01

for double-sided illumination, without system groove, graphics with silicone edge M 1313 $\,$

aluminium | L 6000 \times W 120 \times H 16 mm | 21.539 lbs





Basic parts

Tension fabric extr.


w/o system groove for single-sided illumination




M 1915.01

for single-sided illumination, without system groove, graphics with silicone edge M 1313

aluminium | L 6000 × W 120 × H 40 mm | 26.244 lbs





Tension fabric extr.


for corner solution for illumination




M 1504.01

for corner solution, for illumination, for graphics with silicone edge M 1313, suspendable

aluminium | L 6000 × W 47 × H 16 mm | 10.075 lbs





▶ Attention: maximum size of cube 2500 × 2500 × 2500 mm


Tension fabric extr.


90° corner for cube



M 1332.01

for cube, with 2 × fabric retaining groove, 90°, for tension fabric, graphics with silicone edge M 1313, not suspendable aluminium | L 6000 \times W 46 \times H 46 mm | 13.093 lbs





Corner upright extrusion


90° corner with silicone edge groove




S 382.01

 $90^{\circ}\text{, for connection of OCTAwall 40 frames, fabric can be$ mounted over the extrusion right to the edge

aluminium | L 5000 × W 40 × H 40 mm | 15.238 lbs






Corner upright extrusion | M 260.01


90° corner, round L 6000 × W 120 × H 120 mm



for connecting extrusions with width 16, 40, 80, 120 mm, OCTAwall pro or OCTAwall 40 frames, fabric can be stretched over the extrusion

aluminium | L 6000 × W 120 × H 120 mm | 56.217 lbs





Basic parts


Corner upright extrusion | WP 850.01


90° for fabric



for connecting OCTAwall pro fabric frames, fabric can be tensioned over the extrusion up to the corner

aluminium | L 6000 × W 80 × H 80 mm | 36.332 lbs







Corner upright extrusion | WP 840.01

135° for fabric



for connecting OCTAwall pro fabric frames at 135° angle, fabric can be tensioned over the extrusion up to the corner aluminium | L 6060 × W 80 × H 40 mm | 24.868 lbs





T-extrusion


for 90° connection for double sided fabric / panel




WP 820.01

mounting frames at 90° at any position, for mounting either fabric (with silicone edge M 1313) or panels, installation of 4 × tension lock Z 951/8 possible


aluminium | L 6000 × W 122 × H 28 mm | 25.794 lbs





Tension fabric extr.


for single-sided illumination 135° angle



M 1301.01


135° angle, for single-sided illuminated graphics with silicone edge

aluminium | L 6000 × W 72 × H 47 mm | 14.429 lbs



Corner connector


for M 1607 L 40 × W 40 × H 3 mm




M 1619.37

for connection of fabric tension extrusion M 1607, incl. 2 × set screw M 1852/20 (M5)

steel | L 40 \times W 40 \times H 3 mm | 0.037 lbs







Basic parts


Corner connector


for M 1302/M 1309 L 82 × W 82 × H 3 mm



M 1335.37

to connect extrusions M 1302 and M 1309 steel | L 82 \times W 82 \times H 3 mm | 0.139 lbs





Corner connector


90° for M 1920




M 1926.37

90°, for connection of extrusion M 1920, incl. 4 × set screw S 4330/20 (M5)

steel | L 49 × W 49 × H 4 mm | 0.057 lbs





Corner connector


90° for M 1930 / M 1970 / M 1601




M 1927.00

90°, for connection of extrusion M 1930, M 1970 and M 1601, and for stabilization of miter with profile M 1920, incl. $4\times$ set screw S 4330/20 (M5)

steel | L 50 \times W 50 \times H 10 mm | 0.031 lbs





Corner connector


90° lock chamber 21 × 12 mm




Z 966.00

90°, for lock chamber 21 × 12 mm, with 2 × E 111 and E 111/20 countersunk screw

aluminium | L 90 \times W 90 \times H 8 mm | 0.181 lbs





Corner connector


90° lock chamber 21 × 12 mm




Z 990.00

90°, for extrusions with 21 × 12 mm lock chamber, incl. 2 × M10 threads for adjustable foot C 440/F, incl. 2 × hex-star screw E 111 and E 111/20

zinc die cast | L 96 × W 96 × H 12 mm | 0.309 lbs





Basic parts

Corner connector


90° lock chamber 21 × 12 mm



Z 965B.00

90°, for extrusions with lock chamber 21 × 12 mm, incl. 2 × hex-star screw E 111 and E 111/20

zinc die cast | L 55 × W 21 × H 12 mm | 0.168 lbs



n steep thread

Corner connector


90° lock chamber 16 × 12 mm




M 1965B.00

90°, for extrusions with 16 × 12 mm tension lock chamber, with 2 × E 111 countersunk screw and E 111/20

zinc die cast | L 55 × W 55 × H 16 mm | 0.112 lbs





Knuckle


90° for W 906 / M 1307




W 916.39

for connection of 2 fabric tension extrusions, 90°, incl. 2 × screw E 111/m and M 1510/20, for connection of 2 fabric tension extrusions, with thread M 10 for installation of adjustable foot C 440/F

zinc die cast | L 106 \times W 106 \times H 40 mm | 0.474 lbs






Knuckle


for M 1504 L 96 × W 96 × H 96 mm



M 1535.31

for connection with tension fabric extrusion M 1504 plastic | L $96 \times W 96 \times H 96 \text{ mm}$ | 0.123 lbs





Knuckle


internal for 3 × M 1332




M 1334.37

for mounting 3 \times fabric tension extrusion M 1332, incl. 6 \times set screw M 1334/20 (M6)

steel | L 80 \times W 80 \times H 80 mm | 0.478 lbs





Basic parts

Internal connector


for M 1302 L 60 × W 23 × H 3 mm




M 1336.37

for mounting to fabric tension extrusion M 1302, with 2 × set screw M 1334/20, 1 × round head screw with flange M 1139/20 (M6) and 1 × washer M 1469/40

steel | L 60 × W 23 × H 3 mm | 0.015 lbs





Internal connector


bracing for M 1302



M 1314.37

for bracing of fabric frames made of fabric tension extrusion M 1302, incl. 5 \times round head screw with flange M 1557/20 (M6) and 5 \times hex nut E 601/M (M6)

steel | L 80 × W 80 × H 2 mm | 0.284 lbs





◄ in connection with extrusion M 1312

U-channel extrusion


bracing for M 1302



M 1312.00

for bracing of tension fabric, extrusion M 1302 aluminium | L 6000 \times W 20 \times H 15 mm | 3.439 lbs





Threaded plate


for bracing for M 1302



M 1338.37

for bracing of M 1302, can be mounted subsequently in fabric tension extrusion M 1302 for ceiling panel, fermale thread M6 steel I L $22 \times W$ $12 \times H$ 3 mm | 0.013 lbs






Round extrusion

for bracing L 5000 × W 26.3 × H 26.3 mm



M 1208.85

for frame bracing tension lock Z 961/8 can be mounted aluminium | L 5000 \times W 26.3 \times H 26.3 mm | 4.78 lbs





Basic parts

Beam extrusion


groove depth 7 mm L 5000 × W 50 × H 16 mm



Z 460.01 | .11

for installation of cube illumination, installation of Z 951/13 tension lock, groove depth 7 $\rm mm$

aluminium | L 5000 × W 50 × H 16 mm | 8.719 lbs

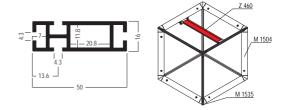

Beam extrusion


2 system grooves L 5000 × W 40 × H 16 mm



Z 4400.01

2 system grooves, tension lock Z 961/13 can be mounted, groove depth 7 $\rm mm$

aluminium | L 5000 × W 40 × H 16 mm | 7.055 lbs



Accessories


Tension fabric extr.


for double sided fabric L 6000 × W 40 × H 10 mm



M 1310.01

for double sided fabric (with silicone edge M 1313), for mounting in system groove with fixing set M 1345, with 13 × hole 18 mm dia. aluminium | L 6000 × W 40 × H 10 mm | 5.939 lbs





■ in connection with M 1345


Tension fabric extr.


for double sided fabric L 6000 × W 80 × H 9 mm



M 1325.01

for double sided fabric (with silicone edge M 1313), for mounting in system groove with fixing set M 1345, with 13 \times hole 18 mm dia. aluminium | L 6000 \times W 80 \times H 9 mm | 11,751 lbs





对 in connection M 1345


Tension fabric extr.


for double sided fabric L 6000 × W 120 × H 9 mm



M 1330.01

for double sided fabric (with silicone edge M 1313), for mounting in system groove with fixing set M 1345, with 13 × hole 18 mm dia. aluminium | L 6000 × W 120 × H 9 mm | 18.254 lbs





■ in connection with M 1345


Tension fabric extr.

45° for single sided fabric



M 1321.01

45°, for single sided fabric (with silicone edge M 1313), with 11 × hole 8.9 × 18 mm, for mounting in system groove: for 40 mm square extrusions use fixing set M 1348, for 80 mm and 120 mm square extrusions use fixing clip M 1339 and fixing set M 1348 aluminium | L 6000 × W 43 × H 20 mm | 5.053 lbs

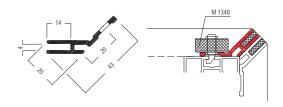

Tension fabric extr.

for system groove 4.3 mm for single sided fabric



M 1319.35

for single sided fabric (with silicone edge M 1313), for system groove 4.3 mm, with 2 fabric grooves plastic | L 6000 \times W 15 \times H 20 mm | 3.219 lbs





Accessories

Tension fabric extr.


for single sided fabric L 6000 × W 28.5 × H 20 mm




M 1322.01

for single sided fabric (with silicone edge M 1313), with 11 \times hole 8.9 \times 18 mm, for mounting in system groove: for 40 mm square extrusions use fixing set M 1348, for 80 mm and 120 mm square extrusions use fixing clip M 1339

aluminium | L 6000 \times W 28.5 \times H 20 mm | 4.471 lbs





Tension fabric extr.


90° outer corner for single sided fabric



M 1322/E.01

 90° outer corner, for single sided fabric (with silicone edge M 1313), with 11 × hole 8.9 × 18 mm, for mounting in system groove: for 40 mm square extrusions use fixing set M 1348, for 80 mm and 120 mm square extrusions use fixing clip M 1339 and fixing set M 1348

aluminium | L 6000 × W 48.5 × H 27.8 mm | 9.753 lbs





Tension fabric extr.


90° internal corner for single sided fabric



M 1322/I.01

 90° internal corner, for single sided fabric (with silicone edge M 1313), with 11 × hole 8.9 × 18 mm, for mounting in system groove: for 40 mm square extrusions use fixing set M 1348, for 80 mm and 120 mm square extrusions use fixing clip M 1339

aluminium | L 6000 \times W 56.3 \times H 27.8 mm | 10.172 lbs

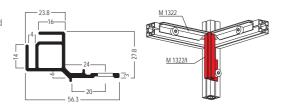

End plate


for extrusion WP 840 for fabric corner 135°



WP 80-9.21

for mounting to corner upright extrusion WP 840, for fabric corner 135°, to create top and bottom horizontal fabric groove, with thread M10 for installation of adjustable foot

steel | L 50 \times W 83 \times H 6 mm | 1.887 lbs

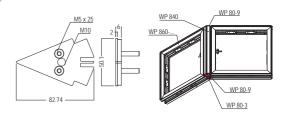

End plate


for 80 mm extrusions for M 260




M 261.21

for Quarter-round extrusion M 260 in connection with 80 mm extrusions, to create top and bottom horizontal fabric groove, with drilling 11 mm dia. for adjustable foot

steel | L 120 × W 120 × H 6 mm | 0.739 lbs





Accessories


End plate


for 120 mm extrusions for M 260



M 271.21

for Quarter-round extrusion M 260 in connection with 120 mm extrusions, to create top and bottom horizontal fabric groove steel | L 120 \times W 120 \times H 6 mm | 0.992 lbs





Connecting extrusion

for M 1332 L 6000 × W 28 × H 26 mm



M 1326.01

can only be slided in extrusion M 1332 before assembly aluminium \mid L 6000 \times W 28 \times H 26 mm \mid 7.213 lbs



Fixing set


for M 1310/M 1325/M 1330 L 28 × W 24 × H 24 mm




M 1345.37

only for fixing of extrusions M 1310 / M 1325 / M 1330 to system groove 4.3 mm, with 1 \times hammerhead screw M 1345/Ha "gunmetal finish"

steel | L 28 × W 24 × H 24 mm | 0.086 lbs





Fixing set


for M 1321 / M 1322/E/I L 21 × W 24 × H 24 mm




M 1348.37

two-parts, only for mounting of extrusion M 1321 / M 1322 / M 1322/E / M 1322/I to system groove 4.3 mm, with 1 \times galvanized hammerhead screw M 1348/Ha

steel | L 21 \times W 24 \times H 24 mm | 0.084 lbs






Quick connector


Set for frames WP 860



WP 80-1.90

M8, for connecting frame elements WP 860 steel | L 136 \times W 40 \times H 40 mm | 0.218 lbs





ス Caution: check existing connections after transport

Accessories


Quick connector


Set for uprights WP 850/WP 840



WP 80-2.90

M8, for connecting frame elements to corner upright extrusion WP 850/WP 840 and for mounting of cover extrusion WP 830 steel | L 97 \times W 30 \times H 30 mm | 0.148 lbs





→ Caution: check existing connections after transport


Adjustable foot


M10 for frame elements



WP 80-3.37

for installation in frame elements with M10 thread, fully retractable in the function channel of OCTAwall pro frames steel | L $24 \times W 24 \times H 80$ mm | 0.132 lbs






Base plate


for M 1307 L 320 × W 120 × H 8 mm



M 1347.21

for frames made out of M 1307, without screw-set steel | L 320 \times W 120 \times H 8 mm | 5.154 lbs






Base plate

for M 1307 L 320 × W 300 × H 8 mm



M 1357.21

for small frames made of M 1307, without screw set steel | L 320 \times W 300 \times H 8 mm | 12.842 lbs





Fixing set


for M 1357 / M 1347 L 61 × W 32 × H 17 mm




M 1347/SK.90

accessory for base plate M 1357 / M 1347, suitable for tension fabric extrusion M 1307

steel | L 61 \times W 32 \times H 17 mm | 0.165 lbs





Accessories


Threaded plate

lock chamber 21 × 12 mm L 55 × W 20 × H 11 mm



M 1327.00

for extrusions with lock chamber 21 × 12 mm, incl. mounting parts aluminium | L 55 × W 20 × H 11 mm | 0.143 lbs

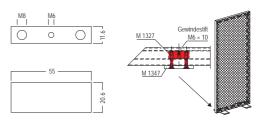

Adaptor


for M 1332 L 80 × W 28 × H 20 mm



M 1329.01

can only be slided in in extrusion M 1332 before assembly for connection of 16 mm beam extrusions for reinforcement, with 1 \times countersunk screw E 111/g (M6)

aluminium | L 80 × W 28 × H 20 mm | 0.095 lbs




Adaptor


for double sided bracing for cube



M 1545.37

for double sided bracing, to install 16 mm bracing extrusions to cube extrusion M 1504, with 2 \times M 1472 hammerhead screw steel | L 28 \times W 28 \times H 95 mm | 0.254 lbs





mount bracing only on the same side as illumination element, otherwise shadows may occur

Adaptor


for single sided bracing for cube



M 1547.37

for single sided bracing, to install 16 mm bracing extrusion to cube extrusion M 1504, with 2 \times hammerhead screw M 1472

steel | L 16 \times W 16 \times H 95 mm | 0.216 lbs

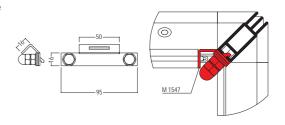

mount bracing only on the same side as illumination element, otherwise shadows may occur

Screw eye

max. 45 kg Opening 12.3 mm dia.



E 218.41

for system groove 4.3 mm, opening 12.3 mm dia., with 1 × hammerhead screw E 218/1 (M5) and 1 × eye nut steel | L 28 × W 22 × H 12 mm | 0.029 lbs



7 maximum load capacity 45 kg

Accessories

Screw eye


max. 35 kg Opening 20 mm dia.



M 1233.37

for system groove 4.3 mm, opening 20 mm dia., consists of 1 \times hammer head screw (M8) M 1470/Ha and 1 \times eye nut (M8) M 1401/21

steel | L 36 \times W 20 \times H 36 mm | 0.134 lbs



■ max. load capacity 35 kg


Screw eye for M 1302



M 1337.37

for vertical ceiling suspension, can be mounted subsequently to extrusion M 1302 $\,$

steel | L 22 x B 12 x H 3 mm | 0.035 lbs





Wall retainer


for M 1302 L 40 × W 30 × H 2 mm



M 1433.37

for fabric tension extrusion M 1302, incl. 1 \times set screw M 1431/20 (M4)

steel | L 40 \times W 30 \times H 2 mm | 0.097 lbs

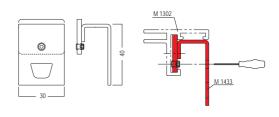

Wall retainer


for M 1309 L 35 × W 30 × H 2 mm



M 1434.37

for fabric tension extrusion M 1309, incl. 1 \times set screw M 1431/20 (M4)

steel | L 35 \times W 30 \times H 2 mm | 0.049 lbs

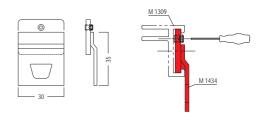

Retainer


for extrusions 80/120 mm for fixing set M 1348



M 1339.37

for extrusions 80/120 mm, for mounting extrusions M 1321 / M 1322 / M 1322/E / M 1322/I to system groove 4.3 mm, for fixing set M 1348

steel | L 70.7 × B 28 × H 10 mm | 0.082 lbs



◄ in connection with M 1348

M 1020

Accessories

Long-arm floodlight


25 W L 490 × W 232 × H 40 mm



M 1494.31 | .33

for swivel mounting in system groove, incl. adapter plate and connection cable 3 m, 25 W, 2500 lm, 4000 K, voltage input: 100-240 VAC, voltage output: 27-35 VDC, color rendering index: 80+ CRI, beam angle: 120°

aluminium | L 490 × W 232 × H 40 mm | 1.675 lbs





■ without connecting cable M 1494-xxxx


Connecting cable


for M 1494 1000 mm long



M 1494-1000.33

230V connecting cable for IEC C13 connections, one side plug, one side socket, can also be used as an extension rubber | 1000 mm long | 0.254 lbs





Weitere Abmessungen:

M 1494-2000.33 M 1494-3000.33 2000 mm lang 3000 mm lang 0.507 lbs 0.772 lbs


Long-arm floodlight


LED / 12W / 230V L 535 × W 119 × H 250 mm



M 1498.31

for voltage 100 - 230 V, for mounting in system groove 4.3 mm, 12 W / 230 V, 4000 K, 960 lm, incl. 1 × M 1481 retainer, 1 × cable 3000 mm, with integrated transformer and screwed on safety glass aluminium | L 535 × W 119 × H 250 mm | 1.354 lbs





Silicone edge


100 meter roll for fabric



M 1313.50

for mounting fabric to all tension fabric extrusions, 100 m roll silicone | W 14 \times H 3 mm | 11.332 lbs





shop fitting extrusions

Display cases and more.



Index

▼ OVERVIEW	208
7 COMPONENTS	
7 Basic extrusions	211
7 Accessories	215
7 Doors	219
∇ Connectors/Knuckles	225
→ Holder/Screws	231
7 Tools	233
7 Products	234

Overview

Basic extrusions



















































































Overview

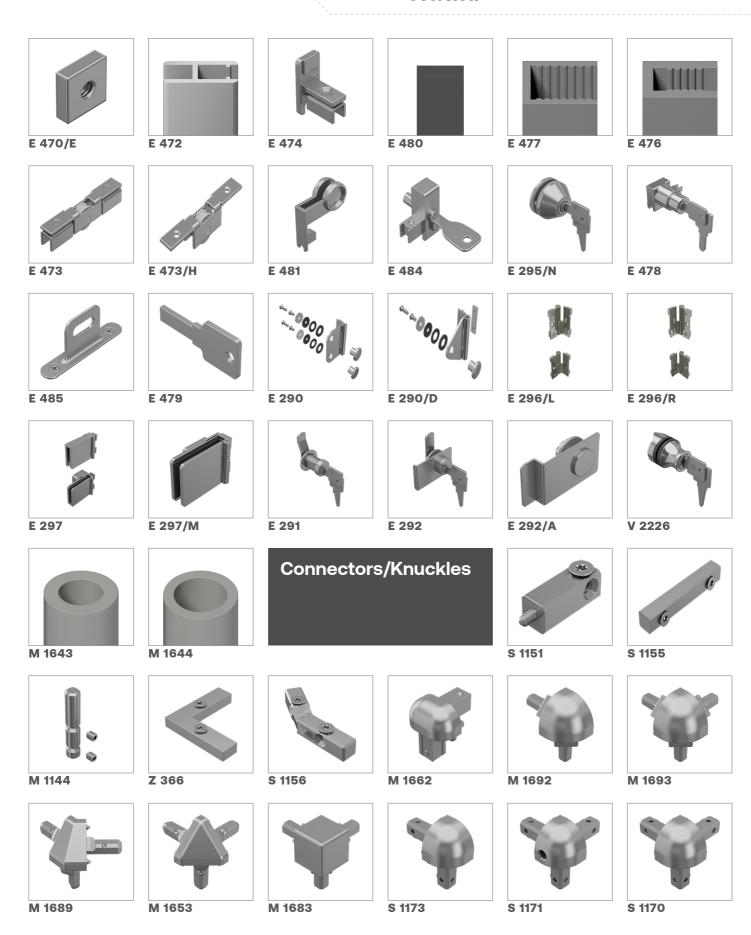

Overview

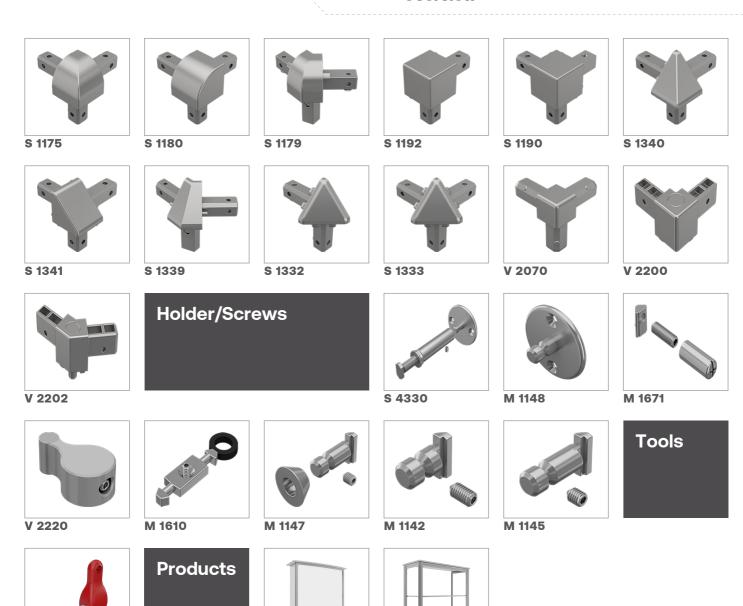

Q 800

Q 400

V 2505

Basic extrusions

Upright extrusion

L 5000 × W 25 × H 16 mm 5000 mm long



V 2040.01

aluminium | L 5000 × W 25 × H 16 mm | 5.313 lbs





Beam extrusion

2 system grooves L 5000 × W 25 × H 16 mm



M 1602.01





Beam extrusion

1 system groove L 5000 × W 40 × H 16 mm




Z 4401.01

1 system groove, tension lock Z 961/13 can be mounted aluminium | L 5000 \times W 40 \times H 16 mm | 7.452 lbs




Beam extrusion


4 system grooves L 5000 × W 40 × H 32 mm



Z 2100.01

4 system grooves, tension lock Z 961/13 can be mounted aluminium | L 5000 \times W 40 \times H 32 mm | 13.206 lbs






Beam extrusion

3 system grooves L 5000 × W 40 × H 32 mm



Z 2105.01


3 system grooves, tension lock Z 961/13 can be mounted aluminium | L 5000 \times W 40 \times H 32 mm | 12.258 lbs



Basic extrusions

Beam extrusion

2 system grooves L 5000 × W 40 × H 38 mm



Z 4100.01

2 system grooves, tension lock Z 961/13 can be mounted aluminium | L 5000 \times W 40 \times H 38 mm | 9.127 lbs






Square extrusion


2 system grooves L 5000 × W 22 × H 22 mm



M 1625.01

2 system grooves aluminium | L 5000 \times W 22 \times H 22 mm | 4.74 lbs






Square extrusion

2 system grooves L 5000 × W 25 × H 25 mm



V 2000.01

2 system grooves $\label{eq:system} \mbox{aluminium | L 5000 \times W 25 \times H 25 mm | 6.371 lbs}$



Square extrusion

without system groove L 5000 × W 32 × H 32 mm



S 1123.01

without system groove aluminium | L 5000 \times W 32 \times H 32 mm | 8.311 lbs




Square extrusion


3 system grooves L 5000 × W 32 × H 32 mm



S 1125.01

3 system grooves $\label{eq:system} \mbox{aluminium} \ | \ \mbox{L} \ \mbox{5000} \times \mbox{W} \ \mbox{32} \times \mbox{H} \ \mbox{32} \ \mbox{mm} \ | \ \mbox{8.889} \ \mbox{lbs}$





Basic extrusions


Double triangular


2 system grooves L 5000 × W 22 × H 22 mm



M 1622.01 | .41

2 system grooves $\label{eq:system} \mbox{aluminium } \mbox{ | L 5000 \times W 22 \times H 22 mm | 3.902 lbs}$






Double triangular

3 system grooves L 5000 × W 32 × H 32 mm



S 1303.01

3 system grooves aluminium | L 5000 \times W 32 \times H 32 mm | 7.046 lbs





Angle extrusion


135° 2 system grooves



M 1629.01 | .41

135°, 2 system grooves ${\rm aluminium} \ | \ L \ 5000 \times W \ 16 \ mm \ | \ 4.74 \ lbs$





Round extrusion

L 5000 × W 24 × H 24 mm 5000 mm long




M 1140.01

24 mm dia.

aluminium | L 5000 × W 24 × H 24 mm | 10.34 lbs






Semi-circular extr.

2 system grooves L 5000 × W 40 × H 20 mm



M 1606.01

2 system grooves $\label{eq:2.1} \mbox{aluminium} \ | \ \mbox{L} \ \mbox{5000} \times \mbox{W} \ \mbox{40} \times \mbox{H} \ \mbox{20} \ \mbox{mm} \ | \ \mbox{6.706} \ \mbox{lbs}$



Basic extrusions


Semi-circular extr.


4 system grooves L 5000 × W 64 × H 32 mm



S 1106.01

4 system grooves $\label{eq:constraint} \mbox{aluminium} \ | \ \mbox{L} \ \mbox{5000} \times \mbox{W} \ \mbox{64} \times \mbox{H} \ \mbox{32} \ \mbox{mm} \ | \ \mbox{15.388 lbs}$






Quarter-round extrusion


2 system grooves L 5000 × W 22 × H 22 mm



M 1620.01

2 system grooves $\label{eq:system} \mbox{aluminium } \mbox{ | L 5000 \times W 22 \times H 22 mm | 3.968 lbs}$






Quarter-round extrusion


3 system grooves L 5000 × W 32 × H 32 mm



S 1105.01

3 system grooves $\label{eq:system} \mbox{aluminium | L 5000 <math display="inline">\times$ W 32 \times H 32 mm | 8.862 lbs





Accessories


Adjustable foot

20-28 mm L 40 × W 40 × H 39 mm



S 1140.41

chrome-plated cover, height adjustable from 20-28 mm steel/plastic | L 40 \times W 40 \times H 39 mm | 0.082 lbs






Adjustable foot


20-45 mm L 40 × W 40 × H 78 mm



S 1141.41

chrome-plated cover, height adjustable from 20-45 mm steel/plastic | L 40 \times W 40 \times H 78 mm | 0.117 lbs






End plate


for Z 2100/Z 2105 L 40 × W 32 × H 23 mm



Z 2131.39

for beam extrusions Z 2100 / Z 2105 zinc die cast | L 40 \times W 32 \times H 23 mm | 0.084 lbs






End cap


for M 1625 L 22 × W 22 × H 12 mm



M 1665.35

for square extrusions M 1625 plastic | L 22 × W 22 × H 12 mm |






End plate


for S 1125 L 32 × W 32 × H 23 mm



S 1142.39

for square extrusion S 1125 zinc die cast | L 32 \times W 32 \times H 23 mm | 0.071 lbs





Accessories


End plate

for M 1622 L 22 × W 22 × H 15 mm



M 1650.39 | .41

for triangular extrusion M 1622 zinc die cast | L 22 \times W 22 \times H 15 mm | 0.02 lbs




End plate


for S 1303 L 33 × W 33 × H 23 mm



S 1334.39 | .41

for triangular extrusion S 1303 zinc die cast | L 33 \times W 33 \times H 23 mm | 0.066 lbs






End plate

135° for M 1629



M 1685.41

135°, for corner extrusion M 1629 zinc die cast | L 29 × W 21 × H 15 mm | 0.024 lbs




End cap


L 24 × W 24 × H 23 mm



M 1149.39

for round extrusion M 1140 steel | L 24 \times W 24 \times H 23 mm | 0.064 lbs






End cap


for M 1600 L 21 × W 21 × H 10 mm



M 1630.35

for quarter-round extrusion M 1600 plastic | L 21 \times W 21 \times H 10 mm |





Accessories

End plate


for S 1100/S 1105 L 32 × W 32 × H 23 mm



S 1131.39

for quarter-round extrusions S1100 / S 1105 zinc die cast | L 32 \times W 32 \times H 23 mm | 0.079 lbs






End cap

for S 1100/S 1105 L 32 × W 32 × H 14 mm



S 1130.35

for quarter-round extrusions S1100 / S 1105 plastic | L 32 × W 32 × H 14 mm | 0.009 lbs





Threaded plug

M10 for S 1100/S 1105



S 1132.00

thread M10, for quarter-round extrusions S 1100 / S 1105 zinc die cast | L 14 × W 14 × H 36 mm | 0.077 lbs





Threaded plug

L 36 × W 14 × H 14 mm



S 1133.37

for extrusion chambers 14 \times 14 mm, thread M10 (20 mm deep), incl. 1 × countersunk screw E111/m (M6)

steel | L 36 × W 14 × H 14 mm | 0.077 lbs






Threaded plug


M10 for S 1303



S 1336.00

for triangular extrusion S 1303, with female thread M10 zinc die cast | L 33 × W 33 × H 23 mm | 0.066 lbs





Accessories

Threaded plate


M10 for extrusions 32 mm




S 1335.00

to be used with quarter-round, square and triangular extrusions 32 mm, female thread $\mbox{M10}$

zinc die cast | L 96 × W 40 × H 9 mm | 0.254 lbs





Threaded plate

for extrusions 20/22 mm L 10 × W 8 × H 3 mm



M 1636.37

for extrusions 20/22 mm, female thread M4 steel | L 10 \times W 8 \times H 3 mm |



Doors


door slide fitting


for glass sliding doors L 5000 × W 32 × H 14 mm



E 470/N.01

for 5 and 6 mm glass sliding doors aluminium | L 5000 \times W 32 \times H 14 mm | 3.836 lbs





→ plastic clip E 470/C to be ordered separately


door slide fitting for E 472


for E 472 L 5000 × W 32 × H 9 mm



E 471/N.01

for runner frame extrusion E 472 aluminium | L 5000 \times W 32 \times H 9 mm | 3.549 lbs





plastic clip E 470/C to be ordered separately

Threaded plate

female thread M4 L 10 × W 10 × H 3 mm



E 470/E.37

for system groove 4.3 mm, female thread M4 steel | L 10 \times W 10 \times H 3 mm | 0.004 lbs





Runner frame extrusion


Sliding door for glass 5-6 mm



E 472.01

for glass thickness 5 and 6 mm aluminium | L 5000 \times W 12 \times H 28 mm | 3.836 lbs






End piece

for E 472 L 28 × W 20 × H 12 mm



E 474.39

for lateral connection to extrusion E 472 zinc die cast | L 28 × W 20 × H 12 mm | 0.024 lbs



Doors

Flat rubber

self-adhesive for E 470/N

E 480.33

self-adhesive, to be glued into the vertical built-in extrusion E 470/N


rubber | L 10000 × W 12 × H 4 mm | 0.154 lbs





Clamping extrusion

for glass 6 mm L 5000 × W 6 × H 12 mm




E 477.51

soft, to insert 6 mm glass in extrusion E 472 plastic | L 5000 × W 6 × H 12 mm | 0.368 lbs



Clamping extrusion

for glass 5 mm L 5000 × W 8 × H 10 mm



E 476.51

soft, to insert 5 mm glass in extrusion E 472 plastic | L 5000 × W 8 × H 10 mm | 0.408 lbs






for E 472 L 53 × W 13 × H 8 mm



E 473.37

to screw in extrusion E 472 steel | L 53 × W 13 × H 8 mm | 0.031 lbs



Roller

for wooden sliding doors L 52 × W 13 × H 8 mm



E 473/H.37

with 2 × fixing hole 2.8 mm dia. for wood screws steel | L 52 × W 13 × H 8 mm | 0.018 lbs



■ maximum thickness of wooden sliding door 13 mm

Doors


Glide handle

for glass 5/6 mm fpr E 472



E 481.39

to be mounted in extrusion E 472, for glass thickness 5 and 6 mm zinc die cast | L 455 \times W 53 \times H 18 mm | 0.121 lbs



Locking end piece


for E 472 L 140 × W 80 × H 10 mm



E 484.90

for mounting in extrusion E 472, alternative to E 478, with locking facility and 2 \times key

steel | L 140 × W 80 × H 10 mm | 0.051 lbs

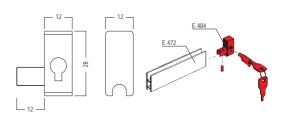

Sliding door lock

for panel 4-6 mm L 140 × W 80 × H 35 mm




E 295/N.33

for 4-6 mm panels, incl. 2 \times key E 292/Sch, key can be removed when locked or unlocked

metal | L 140 \times W 80 \times H 35 mm | 0.185 lbs





Sliding door lock


universal right/left for E 472



E 478.39

to be mounted in extrusion E 472, for use on left and right hand side, incl. 2 \times key E 479, universal

zinc die cast | L 695 × W 43 × H 28 mm | 0.214 lbs




Locking plate

for E 478 L 55 × W 10 × H 21 mm



E 485.39

to be used in conjunction with E 478, incl. 2 × fixing screw M3 zinc die cast | L 55 × W 10 × H 21 mm | 0.015 lbs



Doors


Replacement key


for E 478 L 49 × W 19 × H 2 mm



E 479.38

for sliding door lock E 478 $$\rm{metal}\ |\ L\ 49\times W\ 19\times H\ 2\ mm\ |\ 0.02\ lbs}$






Door hinge


for hinged doors L 60 × W 50 × H 4 mm



E 290.01

for hinged glass and wooden doors 5, 6, 8, 16, 19 mm, incl. mounting parts and distance washers aluminium | L $60 \times W$ $50 \times H$ 4 mm | 0.176 lbs





Door hinge


for hinged doors L 140 × W 80 × H 11 mm




E 290/D.01

for hinged glass and wooden doors 5, 6, 8, 16, 19 mm, incl. mounting parts and distance washers







Door hinge

left for hinged wooden doors






E 296/L.38

for hinged wooden doors 16 mm, left hand version, incl. 2 × threaded plate E 470/E and 2 × countersunk screw E 297/Z (M4) brass | L 140 × W 80 × H 11 mm | 0.104 lbs





Door hinge

right for hinged wooden doors






E 296/R.38

for hinged wooden doors 16 mm, right hand version, incl. 2 × threaded plate E 470/E and 2 × countersunk screw E 297/Z (M4) brass | L 140 × W 80 × H 11 mm | 0.104 lbs





Doors


Glass


for glass 5-6 mm L 80 × W 52 × H 32 mm



E 297.39

for glass doors 5-6 mm, 1 pair, incl. mounting parts zinc die cast \mid L 80 × W 52 × H 32 mm \mid 0.467 lbs





■ no drill hole in glass panel is necessary


Glass


center for glass 5-6 mm



E 297/M.39

for glass doors 5-6 mm, incl. mounting parts, can be used on left hand and right hand side, also as middle hinge plate zinc die cast \mid L 50 × W 38 × H 32 mm \mid 0.234 lbs





Attention: drill hole 12 mm dia. in glass panel is necessary

Hinged


for hinged wooden doors L 25 × W 15 × H 40 mm



E 291.38

for hinged wooden doors 16 and 19 mm, incl.2 × key E 292/Sch, key can only be removed when locked metal | L 25 × W 15 × H 40 mm | 0.137 lbs





Hinged


for hinged glass doors L 30 × W 50 × H 25 mm




E 292.38

for hinged glass doors 5–8 mm, incl. 2 \times key E 292/Sch, key can only be removed when locked

metal | L 30 × W 50 × H 25 mm | 0.146 lbs





Retaining plate

two winged for hinged glass doors




E 292/A.38

for two hinged glass doors 5–6 mm, in conjunction with E 292, with dummy cylinder $\,$

metal | L 140 \times W 80 \times H 9 mm | 0.101 lbs





Doors

Hinged

for hinged glass doors L 66 × W 30 × H 30 mm



V 2226.38

for hinged glass doors 4-6 mm, requires drilling, incl. 2 × key zinc die cast/steel | L 66 × W 30 × H 30 mm | 0.231 lbs



Anti rattle

25 mm long for glass 4 mm




M 1643.51

round, for mounting glass in the system groove, glass thickness 4 mm, insertable in extrusions M 1620 / M 1622 / M 1625 / M 1629, 25 m long

silicone | L 25000 \times W 3 \times H 3 mm | 0.882 lbs





Anti rattle

50 m long for glass 4 mm



M 1644.51

round, for mounting glass in the system groove, glass thickness 4 mm, insertable in extrusion M 1606, 50 m long

silicone | L 50000 × W 5 × H 5 mm | 2.595 lbs





Connectors/Knuckles

Connector

for extrusions 32 mm L 44 × W 14 × H 14 mm



S 1151.37

for quarter-round, square and triangular extrusions 32 mm, incl. 1 × countersunk screw E111/m (M6)

steel | L 44 \times W 14 \times H 14 mm | 0.112 lbs




Internal connector

straight for extrusions 32 mm



S 1155.00

straight, for quarter-round, square and triangular extrusions 32 mm, incl. 2 × countersunk screw E111/m (M6) aluminium | L 90 × W 14 × H 14 mm | 0.108 lbs




Internal connector

for M 1140 + M 1457 L 60 × W 11 × H 11 mm



M 1144.37

for connection of round tube M 1140 with hinged set M 1457 steel | L 60 × W 11 × H 11 mm | 0.088 lbs

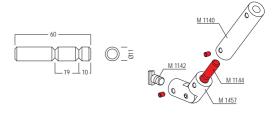

Corner connector


90° for Z 305



Z 366.00

 90° , for beam extrusion Z 305, incl. $2 \times$ countersunk screw M 1611/20 (M5)

aluminium | L 55 × W 55 × H 9 mm | 0.066 lbs

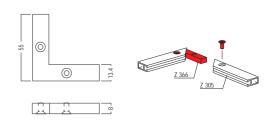


Internal corner connector | S 1156.00

90°-270° for extrusions 32 mm



for quarter-round, square and triangular extrusions 32 mm, adjustable from 90° to 270°, incl. 2 × screw E111/m (M6) aluminium | L 86 \times W 14 \times H 14 mm | 0.075 lbs



Connectors/Knuckles

Knuckle


90° for 2 × M 1606




M 1662.39 | .41

90°, for mounting 2 × semi-circular extrusion M 1606, incl. 2 × set screw E 111/4*8

zinc die cast | L 46 × W 46 × H 40 mm | 0.203 lbs





Knuckle


90° for 2 × M 1620



M 1692.39

90°, for mounting 2 × quarter-round extrusion M 1620, incl. 2 × set screw M 1431/20 (M4)

zinc die cast | L 48 × W 48 × H 22 mm | 0.13 lbs



Knuckle


90° L 48 × W 48 × H 48 mm



M 1693.39

90°, for mounting 3 × quarter–round extrusion M 1620, incl. 3 × set screw M 1431/20 (M4)

zinc die cast | L 48 \times W 48 \times H 48 mm | 0.161 lbs

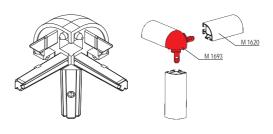

Knuckle


135° for M 1622/M 1629



M 1689.39 | .41

135°, for mounting 2 × triangular extrusion M 1622 and 1 × corner extrusion M 1629, incl. 3 × set screw M 1431/20 (M4)

zinc die cast | L 65 \times W 48 \times H 30 mm | 0.128 lbs

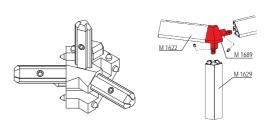

Knuckle


90° for 3 × M 1622




M 1653.39 | .41

90°, for mounting 3 × triangular extrusion M 1622, incl. 3 × set screw M 1431/20 (M4)

zinc die cast | L 48 \times W 48 \times H 48 mm | 0.101 lbs





Connectors/Knuckles

Knuckle


90° for 3 × M 1625



M 1683.39

90°, for mounting 3 × square extrusion M 1625, incl. 3 × set screw M 1431/20 (M4)

zinc die cast | L 48 × W 48 × H 48 mm | 0.209 lbs

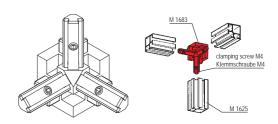


Knuckle

90° for 2 × S 1105



S 1173.39

90°, for mounting 2 × quarter-round extrusion S 1105, incl. 2 × countersunk screw E 111/m (M6) and 2 × set screw E 111/g (M6) zinc die cast | L 72 × W 72 × H 32 mm | 0.461 lbs



Knuckle


90°, M10 for 3 × S 1105



S 1171.39

90°, for mounting 3 × quarter-round extrusion S 1105, incl. 3 × countersunk screw E 111/m (M6) and 3 × set screw E 111/g (M6), with thread M10 (20 mm deep)

zinc die cast | L72 × W72 × H72 mm | 0.538 lbs

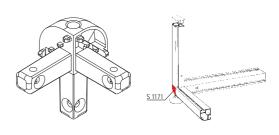


Knuckle

90° for 3 × S 1105



S 1170.39

90°, for mounting 3 × quarter-round extrusion S t105, incl. 3 × countersunk screw E t11/m (M6) and 3 × set screw E t11/g (M6) zinc die cast | L 72 × W 72 × H 72 mm | 0.564 lbs





Knuckle


90° for S 1105/S 1125




S 1175.39

90°, for mounting 2 × quarter-round extrusion S 1105 and 1 × square extrusion S 1125, incl. 3 × countersunk screw E 111/m (M6) and 3 × set screw E 111/g (M6)

zinc die cast | L 72 × W 72 × H 72 mm | 0.578 lbs





Connectors/Knuckles

Knuckle


90° for S 1105/S 1125




S 1180.39

90°, for mounting 1 × quarter-round extrusion S 1105 and 2 × square extrusion S 1125, incl. 3 × countersunk screw E 111/m (M6) and 3 × set screw E 111/g (M6)

zinc die cast | L 72 × W 72 × H 72 mm | 0.575 lbs






Knuckle


135° for S 1105



S 1179.39

for mounting 2 × quarter-round extrusion S 1105, incl. 2 × countersunk screw E 111/m (M6) and 3 × set screw E 111/g (M6) zinc die cast | L 101 × W 73 × H 52 mm | 0.65 lbs





Knuckle


90° for 2 × S 1125



S 1192.39

90°, for mounting 2 × square extrusion S 1125, incl. 2 × countersunk screw E 111/m (M6) and 2 × set screw E 111/g (M6)





Knuckle


90° for 3 × S 1125




S 1190.39

90°, for mounting 3 × square extrusion S 1125, incl. 3 × countersunk screw E 111/m (M6) and 3 × set screw E 111/g (M6)

zinc die cast | L 72 × W 72 × H 72 mm | 0.586 lbs





Knuckle


90° for \$ 1303/\$ 1125



S 1340.39 | .41

90°, for mounting 2 × triangular extrusion S 1303 and 1 × square extrusion S 1125, incl. 3 × countersunk screw E 111/m (M6) and 3 × set screw E 111/g (M6)

zinc die cast | L 75 \times W 75 \times H 75 mm | 0.505 lbs





Connectors/Knuckles

Knuckle


90° for S 1303/S 1125




S 1341.39

90°, for mounting 1 × triangular extrusion S 1303 and 2 × square extrusion S 1125, incl. 3 × countersunk screw E 111/m (M6) and 3 × set screw E 111/g (M6)

zinc die cast | L 72 × W 72 × H 72 mm | 0.514 lbs






Knuckle

135° for S 1303



S 1339.39 | .41

for mounting 2 \times triangular extrusion S 1105, incl. 2 \times countersunk screw E 111/m (M6) and 3 \times set screw E 111/g (M6) zinc die cast | L 101 \times W 49 \times H 73 mm | 0.58 lbs




Knuckle

90° for 2 × S 1303



S 1332.39 | .41

90°, for mounting 2 × triangular extrusion S 1303, incl. 2 × countersunk screw E 111/m (M6) and 2 × set screw E 111/g (M6) zinc die cast | L 73 × W 73 × H 32 mm | 0.34 lbs






Knuckle

90° for 3 × S 1303



S 1333.39 | .41

90°, for mounting 3 × triangular extrusion S 1303, incl. 3 × countersunk screw E 111/m (M6) and 3 × set screw E 111/g (M6) zinc die cast | L 72 × W 72 × H 72 mm | 0.432 lbs



Knuckle


90° for 3 × V 2000



V 2070.39

90°, for mounting 3 × extrusion V 2000, incl. 3 × countersunk screw E 2600/20 (M5)

zinc die cast | L 57 \times W 57 \times H 57 mm | 0.359 lbs



Connectors/Knuckles


Knuckle

90° for V 2000/V 2100



V 2200.35 | .36

for mounting extrusion V 2000, incl. 1 × cylinder screw V 2211 (M8), 2 × countersunk screw V 2212 and 1 × cover plate V 2210 plastic | L 53 × W 27 × H 16 mm | 0.143 lbs




Knuckle

135° for V 2020



V 2202.36

135°, for mounting extrusion V 2020, incl. 1 × cylinder screw V 2211 (M8), 2 × countersunk screw V 2212 and 1 × cover plate V 2210 plastic | L 80 × W 30 × H 30 mm | 0.134 lbs



Holder/Screws

Distance piece


adjustable L 70 × W 54 × H 54 mm



S 4330.01

adjustable, incl. 1 × set screw S 4330/20 (M5) and 1 × hammerhead screw S 4330/2 (M10)

aluminium/steel | L 70 \times W 54 \times H 54 mm | 0.304 lbs

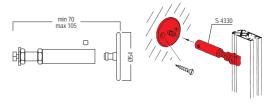


Wall retainer

wall fixing for M 1140



M 1148.37

for wall fixing of round extrusion M 1140 steel | L 29 \times W 54 \times H 54 mm | 0.172 lbs

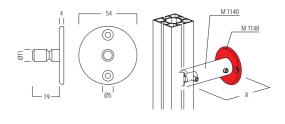

Bracket

with M 1671/G (M5) L 19 × W 8 × H 15 mm




M 1671.37

for extrusions M 1620 / M 1622 / M 1625 / M 1629, incl. set screw M 1671/G (M5)

aluminium/steel | L 19 \times W 8 \times H 15 mm | 0.015 lbs





Bracket


with V 2220/G (M4) L 28 × W 17 × H 12 mm




V 2220.35 | .36

for extrusions V 2000 / M 1620 / M 1622 / M 1625 / M 1629, incl. set screw V 2220/G (M4)

plastic | L 28 × W 17 × H 12 mm | 0.013 lbs





Clamping element


for M 1602 L 43 × W 12 × H 4 mm




M 1610.37

for extrusion M 1602, incl. set screw M 1075/20 (M4) and rubber ring, as a mounting auxiliary universal use right/left

steel | L 43 \times W 12 \times H 4 mm | 0.024 lbs





Holder/Screws


Fixing set for M 1140 L 31 × W 24 × H 10 mm



M 1147.37

for round extrusion M 1140, for system groove 4.3 mm, incl. washer 10 mm $\,$

steel | L 31 × W 24 × H 10 mm | 0.086 lbs




Hammerhead bolt for M 1140 L 24 × W 20 × H 11 mm



M 1142.37

for round extrusion M 1140, or system groove 4.3 mm, incl. set screw M 1104/21 (M6)

steel | L 24 × W 20 × H 11 mm | 0.033 lbs

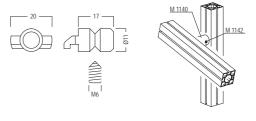



Hammerhead bolt for M 1140 L 31 × W 20 × H 11 mm



M 1145.37

for round tube M 1140, incl. set screw M 1104/21 (M6) steel | L 31 \times W 20 \times H 11 mm | 0.049 lbs





Tools


Screwdriver

A/F 2 mm for V 2220



V 2505.90

for shelf support V 2220, A/F 2 mm, hexagon steel/plastic | L 95 \times W 41 \times H 8 mm | 0.015 lbs



Products

Counter


not illuminated W 902 × H 965 × D 379 mm



Q 400.31

basic set: silver-grey RAL 9006

aluminium | W 902 × H 965 × D 379 mm | 56.835 lbs



Counter


not illuminated W 910 × H 912 × D 446 mm



Q 800.31

base-set, silvergrey RAL 9006, displacement (45°) of the groove for flat welt, Measurements for prints: front: W 905 \times H 905 mm, side: W 445 \times H 905 mm

aluminium | W 910 \times H 912 \times D 446 mm | 38.581 lbs



- → without fabric/graphics
- 7 The silicone edge has to be cut at a 45° angle.



Index

TECHNICAL FEATURES	238
₹ OVERVIEW	240
7 COMPONENTS	
7 Basic parts	242
7 Accessories	246
7 Doors	248
₹ Fabric/Panel/Glass	250







Technical features

Ceiling system: up to 200 kg/m² single load.

Our ceiling systems offer an individually adjusted contamination control for all cleanroom classes. They are modularly expandable and easily fitted with lights and filters. Due to the low weight, installation is quick and easy. All ceiling systems comply with the EN ISO 14644-4 cleanroom specification and are certified by the Fraunhofer institute.

Wallsystem for glass and panel.

All wall systems are flexible in height and width, are built flush, and with non-reflective, antistatic surfaces. Service hatches, doors, switches etc. can easily be integrated. Single, double and glazed walls are available. They comply with the EN ISO 14644-4 cleanroom specification and are certified by the Fraunhofer institute.

Doors for every requirement.

The perfect door system for every situation: single-leaf or double-leaf, DIN left or DIN right, glazed or opaque. The doors can be optionally equipped with further accessories such as drop seals, panic fittings, access control and locking systems (also electric).



ceiling and wall



for glass and panel cladding




various door systems



illuminated ceiling extrusion

Overview

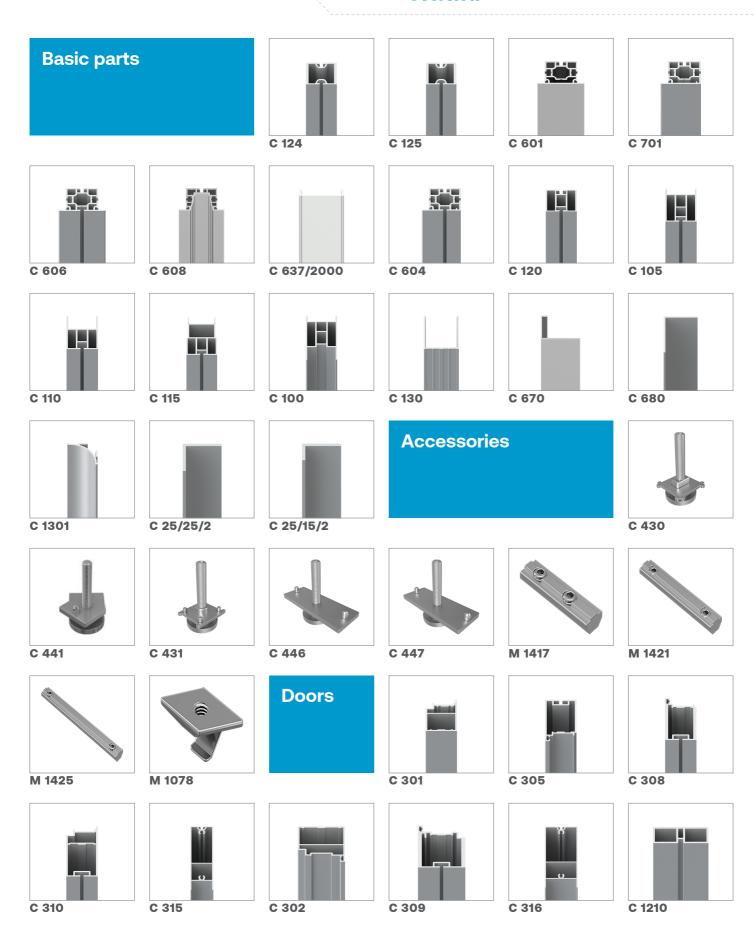

Overview



Basic parts

Upright extrusion

higher bending stiffness L 4500 × W 40 × H 40 mm



C 124.01

2 system grooves, with higher bending stiffness aluminium | L 4500 \times W 40 \times H 40 mm | 12.831 lbs



Custom lengths are possible

Upright extrusion

higher bending stiffness L 6000 × W 40 × H 40 mm



C 125.01


2 system grooves, with higher bending, L 6000 \times W 40 \times H 40 mm

aluminium | L 6000 × W 40 × H 40 mm | 16.693 lbs



Extrusion


3 system grooves support both sides



C 601.01

usable as ceiling beam, upright extrusion and beam extrusion, 3 system grooves, support on both sides

aluminium | L 6000 \times W 58 \times H 40 mm | 19.167 lbs

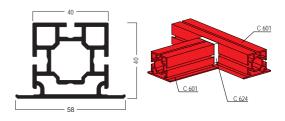

Extrusion


3 system grooves support one side



C 701.01

usable as ceiling beam, upright extrusion and beam extrusion, 3 system grooves, support on one side

aluminium | L 6000 \times W 49 \times H 40 mm | 19.577 lbs



Extrusion


4 system grooves support both sides




C 606.01

usable as ceiling beam, upright extrusion, and beam extrusion, 4 system grooves, support on both sides

aluminium | L 6000 \times W 58 \times H 40 mm | 20.919 lbs






C 301

Basic parts

Ceiling extrusion


for mounting LED lights support both sides



C 608.01

to be used as ceiling light channel in combination with cover extrusion C 637/2000, with opening for mounting LED lights, support on both sides

aluminium | L 6000 × W 58 × H 40 mm | 16.138 lbs

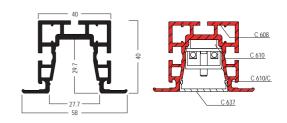

n combination with cover extrusion C 636

Cover extrusion


for extrusion C 608 L 2000 × W 28 × H 7 mm



C 637/2000.50

for internal LED-illumination of open celling extrusion C 608 polycarbonat, satin finish | L 2000 \times W 28 \times H 7 mm | 0.403 lbs





Extrusion


4 sytem grooves support one side




C 604.01

usable as ceiling beam, upright extrusion and beam extrusion, 4 sytem grooves, support on one side


aluminium | L 6000 \times W 49 \times H 40 mm | 20.172 lbs






Beam extrusion

transition glass/glass L 6000 × W 40 × H 40 mm



C 120.01 | .80

transition glass/glass, 2 system grooves aluminium | L 6000 × W 40 × H 40 mm | 15.631 lbs





Beam extrusion


bottom L 6000 × W 40 × H 60 mm




C 105.01 | .80

for wall constructions between glass and panel or as lower wall ending, 1 system groove $\,$

aluminium | L 6000 \times W 40 \times H 60 mm | 20.415 lbs





Basic parts

Beam extrusion


top / bottom L 6000 × W 40 × H 60 mm




C 110.01 | .80

for wall constructions between glass and panel or as upper and lower wall ending, 1 system groove

aluminium | L 6000 × W 40 × H 60 mm | 16.684 lbs






Beam extrusion

for door frame L 6000 × W 40 × H 70 mm



C 115.01 | .80

adjustment extrusion for door frame, 1 system groove aluminium \mid L 6000 \times W 40 \times H 70 mm \mid 19.905 lbs





Beam extrusion


top L 6000 × W 40 × H 80 mm




C 100.01 | .80

for wall constructions between panel and panel or as upper wall ending, 1 system groove


aluminium | L 6000 \times W 40 \times H 80 mm | 22.002 lbs






U-channel extrusion


for floor/ceiling L 6000 × W 45 × H 60 mm



C 130.01

for floor and ceiling aluminium | L 6000 \times W 45 \times H 60 mm | 11.751 lbs






Ceiling extrusion


L 2400 × W 55 × H 43 mm



C 670.01

 55×43 mm, 2400 mm lang aluminium, anodized | L 2400 \times W $55\times$ H 43 mm | 1.224 lbs





Basic parts


L-Extrusion

L 6000 × W 60 × H 40 mm

C 680.01

aluminium | L 6000 × W 60 × H 40 mm | 6.521 lbs





Channeling extrusion


L 6000 × W 36 × H 36 mm



aluminium | L 6000 × W 36 × H 36 mm | 5.785 lbs








L-Extrusion

L 6000 × W 25 × H 25 mm

C 25/25/2.80

aluminium, coated on both sides | L 6000 × W 25 × H 25 mm | 3.417 lbs





L-Extrusion

L 6000 × W 25 × H 15 mm

C 25/15/2.80

aluminium, coated on both sides | L 6000 \times W 25 \times H 15 mm | 2.866 lbs





Accessories


Adjustable foot


M10 for M 1001 / M 1005 / M 1007



C 430.00

for upright extrusions M 1001 / M 1005 / M 1007 zinc die cast/steel | L 47 \times W 47 \times H 80 mm | 0.289 lbs





Adjustable foot


135° corner for upright M 1009



C 441.37

for exterior corner extrusion M 1009, 135°, incl. 2 \times set screw M 1075/20 (M4)

steel, zinc plated | L 53 × W 39 × H 80 mm | 0.348 lbs




Adjustable foot


M10 for extrusion C 124 / C 125



C 431.00

for upright extrusions C 124 and C 125 steel/zinc die cast | L 47 \times W 39 \times H 80 mm | 0.282 lbs






Adjustable foot


beam support both sides for extrusion M 1029



C 446.37

for upright extrusion M 1029 with support for beams on both sides steel, zinc plated | L 106 \times W 39 \times H 80 mm | 0.595 lbs






Adjustable foot


beam support one side for extrusion M 1029



C 447.37

for upright extrusion M 1029 with support for beams on one side steel, zinc plated | L 103 \times W 39 \times H 80 mm | 0.582 lbs





Accessories

Internal connector

straight L 40 × W 10 × H 6 mm



M 1417.00

incl. 2 × set screw S 6035/20 (M6) zinc die cast/steel | L 40 × W 10 × H 6 mm | 0.018 lbs



Internal connector


straight 60 mm



M 1421.00

incl. 2 × set screw S 6035/20 (M6) zinc die cast/steel | L 60 × W 10 × H 6 mm | 0.024 lbs





Internal connector

straight L 100 × W 10 × H 6 mm



M 1425.00

for extension of 2 extrusions, incl. 2 \times set screw S 6035/20 (M6), with system groove 4.3 mm

zinc die cast/steel | L 100 \times W 10 \times H 6 mm | 0.037 lbs



Attention: for long Maxima 120 mm extrusions use M 1131/M 1133 additionally

Threaded plate

female thread M4 with spring




M 1078.37

for system groove 4.3 mm, with antislipping device, female thread M4, with spring $\,$

zinc die cast/steel | L 14 \times W 10 \times H 4 mm | 0.007 lbs





Doors


Door frame extrusion

door system 40 mm L 6000 × W 40 × H 58 mm



C 301.01

for 40 mm door systems ${\rm aluminium \ | \ L\ 6000 \times W\ 40 \times H\ 58\ mm\ | \ 16.623\ lbs}$






Window panel extrusion


door system 40 mm L 6000 × B 40 × H 75.5 mm



C 305.01

for 40 mm door systems aluminium | L 6000 × B 40 × H 75.5 mm | 19.004 lbs






Door panel extrusion

door system 40 mm L 5400 × B 40 × H 75.5 mm



C 308.01

for 40 mm door systems aluminium | L 5400 \times B 40 \times H 75.5 mm | 25.243 lbs






Double door extrusion


door system 40 mm L 6000 × W 40 × H 91 mm



C 310.01

for 40 mm door systems aluminium | L 6000 \times W 40 \times H 91 mm | 23.81 lbs






Door beam extrusion


door system 40 mm L 6000 × W 40 × H 160 mm



C 315.01

for 40 mm door systems, L 6000 \times W 40 \times H 160 mm aluminium | L 6000 \times W 40 \times H 160 mm | 36.072 lbs





Doors


Door frame extrusion


door system 60 mm L 6000 × W 60 × H 64 mm



C 302.00 | .01

for 60 mm door systems ${\rm aluminium \ | \ L \ 6000 \times W \ 60 \times H \ 64 \ mm \ | \ 20.975 \ lbs}$






Door panel extrusion


door system 60 mm L 5500 × B 60 × H 75.5 mm



C 309.01

for 60 mm door systems ${\rm aluminium} \ | \ L \ 5500 \times B \ 60 \times H \ 75.5 \ mm \ | \ 31.87 \ lbs$





Door beam extrusion

door system 60 mm L 6000 × W 60 × H 160 mm



C 316.01

for 60 mm door systems ${\rm aluminium} \ | \ L \ 6000 \times W \ 60 \times H \ 160 \ mm \ | \ 39.945 \ lbs$




Frame extrusion

door system 60 mm for door glazing



C 1210.01

for 60 mm door systems door glazing aluminium | L 6000 \times W 19.5 \times H 47.4 mm | 9.553 lbs



Frame extrusion


door system pharma 40 mm for door glass elements



C 1220.00 | .01

for 40 mm door systems door glass elements aluminium | L 6000 \times W 19.5 \times H 31.4 mm | 7.549 lbs





Fabric/Panel/Glass

Frame extrusion

for return air grill for glassing



C 875.01

for return air grill and glassing aluminium | L 6000 \times W 15.1 \times H 32.7 mm | 4.89 lbs




Supporting edge


small for system groove 4.3 mm



C 612.01


small, for system groove 4.3 mm aluminium | L 6000 \times W 17 \times H 24.5 mm | 2.447 lbs






Supporting edge


wide for system groove 4.3 mm



C 613.01

wide, for system groove 4.3 mm, 36 \times 24,5 mm aluminium | L 6000 \times W 36 \times H 24.5 mm | 4.008 lbs





Suspension extrusion


for panel / glass 6 mm L 6000 × W 1.9 × H 20 mm



C 161.01

for glass or panels up to 6 mm thickness aluminium | L 6000 \times W 1.9 \times H 20 mm | 1.653 lbs






Suspension extrusion


for panel 36 mm L 6000 × W 2.1 × H 20 mm



C 162.01

for panels with 36 mm thickness aluminium | L 6000 \times W 2.1 \times H 20 mm | 1.653 lbs





Fabric/Panel/Glass

Glass panel retainer


insulating glass 35.6 mm L 6000 × W 1.9 × H 22 mm



C 163.01

for 35.6 mm thick insulating glass panels aluminium | L 6000 \times W 1.9 \times H 22 mm | 1.777 lbs






Glass panel retainer


middle for panel / glass 5-8 mm



C 165.01

for centered installation of panels/glass 5-8 mm thick aluminium | L $6000 \times W$ 11.8 $\times H$ 19 mm | 2.381 lbs





Gasket

50 m long for glass 6 mm




C 166.35

for glass 6 mm, for glass panel retainer C 165, W 5.5 \times H 11.5 mm, 50 m long

PVC, soft | W $5.5 \times H 11.5 \text{ mm}$ | 5.346 lbs





Gasket

25 m long for panel 13 mm




C 167.33

for panels with 13 mm thickness, in combination with glass panel retainer C 165, 25 m long

rubber | B 5.3 × H 5.6 mm | 0.816 lbs





Suspension extrusion


middle for panel 16 mm



C 169.01

for panels with 16 mm thickness, centered installation aluminium | L 6000 \times W 10.8 \times H 20 mm | 2.725 lbs





Fabric/Panel/Glass

Suspension extrusion


vertical for panel / glass 5-6 mm




C 170.01

vertical installation, for one-sided flush installation of panels/glass 5 and 6 mm thick

aluminium | L 6000 × W 32.5 × H 20 mm | 3.042 lbs





Suspension extrusion


horizontal for panel / glass 5-6 mm




C 171.01

horizontal installation, for one-sided flush installation of panels/glass 5 and 6 mm thick

aluminium | L 6000 × W 32.5 × H 12 mm | 3.616 lbs






Suspension extrusion

for panel / glass 6 mm L 6000 × W 9 × H 31 mm



C 722.01

for one sided flush installation of panels/glass 6 mm thick aluminium | L 6000 \times W 9 \times H 31 mm | 4.034 lbs





Clip

for E 470/N / E 471/N L 10 × W 9 × H 7 mm




E 470/C.30

to put into extrusion E 470/N / E 471/N, recommendation: 4 pieces / running meter for extrusion C 722, 2 pieces / running meter for extrusion W 910

plastic | L 10 \times W 9 \times H 7 mm |





Spacing extrusion


for triple glazing for panel / glass 3-6 mm



C 151.01

for 60 mm systems, for triple glazing with 3 and 6 mm glass/panel thickness $\,$

aluminium | L 6000 \times W 24.2 \times H 20 mm | 5.035 lbs



◄ cleanroom solutions

Fabric/Panel/Glass


Spacing extrusion


for triple glazing for panel / glass 3-6 mm



C 153.01

for triple glazing with 3 and 6 mm glass/panel thickness aluminium | L 6000 \times W 24.2 \times H 20 mm | 3.726 lbs





Spacing extrusion


L 6000 × W 17.5 × H 7 mm



C 158.01

aluminium | L 6000 \times W 17.5 \times H 7 mm | 1.742 lbs





Adaptor extrusion

system 60 mm L 6000 × W 55 × H 10 mm



C 159.35

for 60 mm systems plastic | L 6000 \times W 55 \times H 10 mm | 4.486 lbs



Adaptor extrusion


L 6000 × W 36.6 × H 10 mm



C 160.35

plastic | L 6000 × W 36.6 × H 10 mm | 3.549 lbs





₹ Frame systems

Overview





octawall 40

octawall 40



octawall pro

₹ Frame systems

Overview




octawall pro



octawall pro

octawall 40 classic/toolless

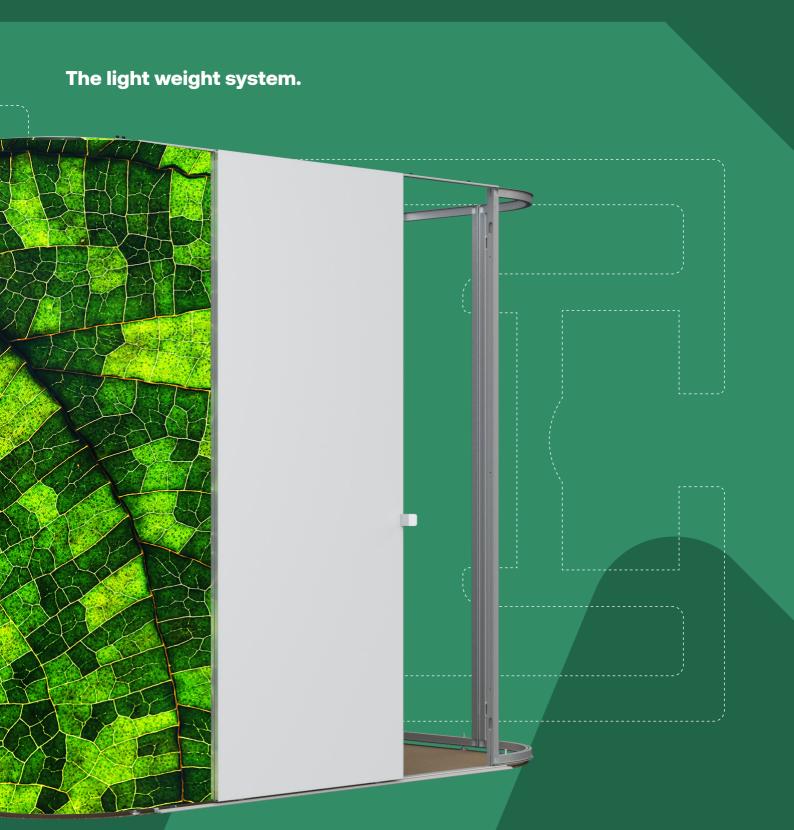

₹ octawall 40

Index


→ octawall 40 classic	259







Das Leichtgewicht im Systembau.

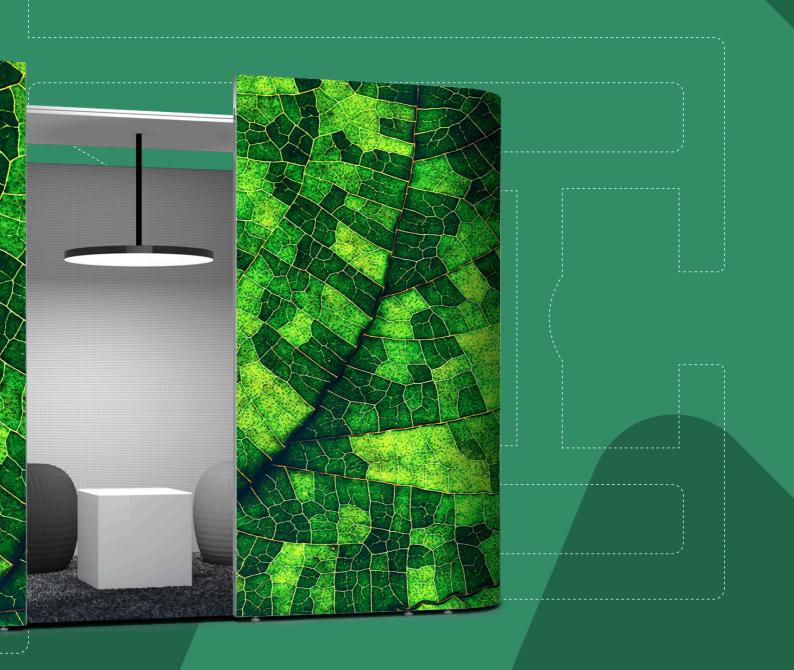

Index

→ TECHNICAL FEATURES	260
尽 OVERVIEW	262
尽 COMPONENTS	
	265
→ Basic parts →	267
Accessories Acces	273
¬ Safety parts	278
7 Doors	279
¬ Fabric/Panel/Glass	280
→ Hinges	281
⊼ Electrical parts	282
Packing/Transport ■ Packing/Transport	285



Technical features



lightweight



fabric + panel W 906



fabric + fabric M 1307



easy corner connection



curved walls



magnetic holder



T-connector for ceiling/walls



silicone edge graphics



almost seamless fabric corner

Flexible. Without interruption.

Thanks to the S 382 corner extrusion, there is no visible corner upright. The straight corner and minimalistic design allow for around-the-corner graphics, offering maximum advertising space.

Curved walls for more freedom.

Curved frames with all-round graphics - totally seamless. This creates maximum advertising space uninterrupted by extrusions. Rooms will appear in a completely new light. Not only from the outside, but also from the inside. **octawall 40 classic** can be equipped with acoustic fabric. No matter if used as a conference room or a place of retreat – with this system, the choice is yours.

Short-term modifications? No problem.

If you forgot something during the planning phase or have to make changes onsite: The W 466 T-connector allows you to install and shift perpendicular walls without the need of a connection extrusion. This way, your booth can easily be adapted to local conditions despite its system construction. Apart from walls, complete ceiling elements can be installed.


1 beam. 2 magnets. An invisible connection.

Literature racks and shelves can be attached without visible fixtures: magnetically to a beam mounted between uprights behind the fabric. Allowing you to display up to 2 kg at any height – no tools required.

Wallwasher for perfect illumination!

Completely shadow-free all the way to the floor. With our wallwasher M 1497, an area of W 1000 × H 2500 mm gets evenly illuminated. Just perfect for highlighting advertising messages.

Overview

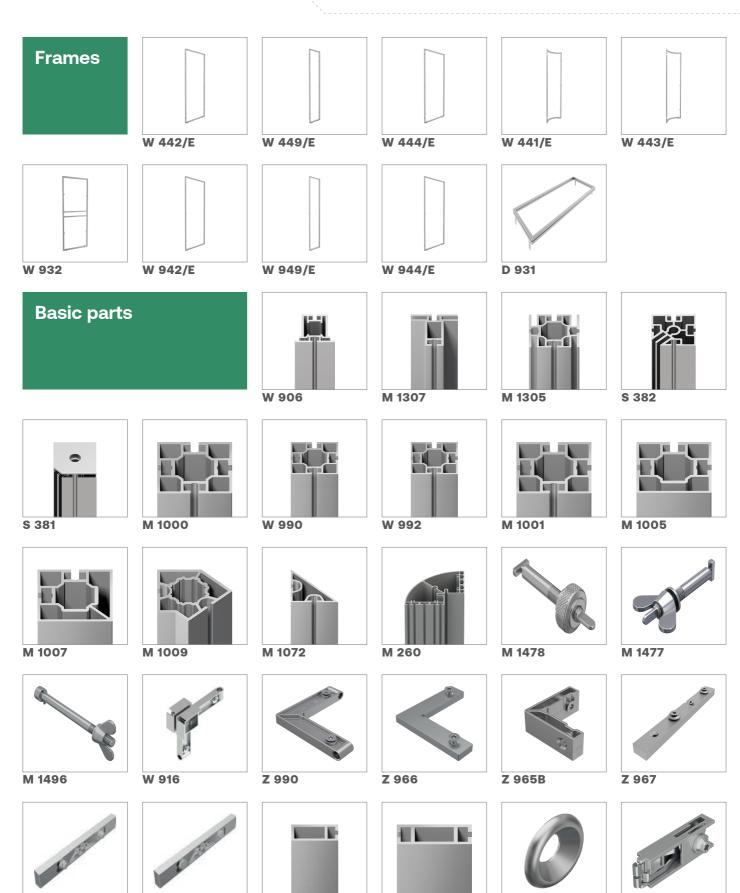

Z 978

Z 977


Z 308

Z 4400

Z 185

Z 961/8

Overview

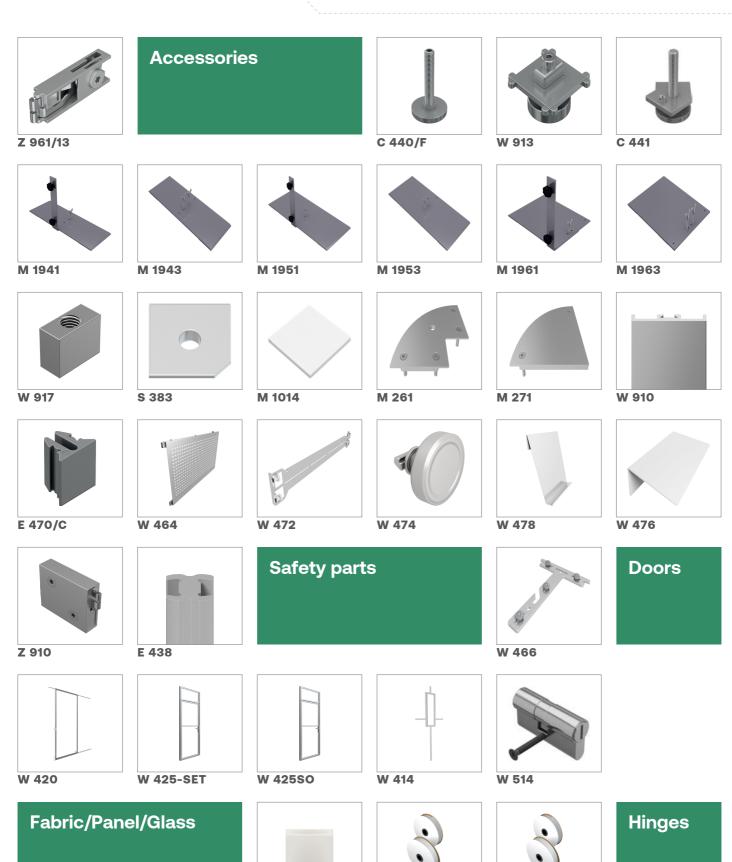


M 1313

W 840

W 841

Overview













































W 2020-D

Frames


Frame

for double sided fabric / panel W 950 × H 2480 × D 40 mm



W 442/E.01

1 × frame of W 906 for double sided fabric/panel, for installation between 2 extrusions, incl. 2 × C 440/F adjustable foot and 6 × mounting-set M 1477, incl. hook tape W 840, with 4 × internal corner connector W 916 (no mitre needed), with drillings for M 1951 and M 1953, drillings for cable management possible on request aluminium | W 950 × H 2480 × D 40 mm | 17.108 lbs



■ fabric dimension = outer frame dimension


Frame

for double sided fabric / panel W 455 × H 2480 × D 40 mm



W 449/E.01

1 × frame of W 906 for double sided fabric/panel, for installation between 2 extrusions, incl. 2 × C 440/F adjustable foot and 6 × mounting-set M 1477, incl. hook tape W 840, with 4 × internal corner connector W 916 (no mitre needed), with drillings for M 1951 and M 1953, drillings for cable management possible on request aluminium | W 455 × H 2480 × D 40 mm | 14.837 lbs



■ fabric dimension = outer frame dimension

Frame

for double sided fabric / panel 40 mm, custom size



W 444/E.01

 $1\times$ frame of W 906 for double sided fabric/panel, for installation between 2 frames or 2 extrusions, incl. $2\times C$ 440/F adjustable foot and mounting-set M 1477, incl. hook tape W 840, with 4 × internal corner connector W 916 (no mitre needed), with drillings for M 1951 and M 1953, drillings for cable management possible on request aluminium | 40 mm, custom size |



- $\ensuremath{^{\upshape N}}$ dimensions and accessories have to be stated on order
- ▼ fabric dimension = outer frame dimension


frame element curved

for double sided fabric / panel W 495 × H 2480 × D 40 mm



W 441/E.01

1 × frame of W 906 for double sided fabric/panel, for mounting on frame or 2 extrusion, incl. 2 × C 440/F adjustable foot and 3 × mounting-set M 1477, incl. hook tape W 840, with 4 × internal corner connector W 916 (no mitre needed), with drillings for M 1951 and M 1953, Drillings for cable management possible on request aluminium | W 495 × H 2480 × D 40 mm | 17.064 lbs






- When combining several curved frames, deviations may occur at the joints.
- fabric dimension = outer frame dimension

frame element curved


for double sided fabric / panel 40 mm, custom size



W 443/E.01

 $1\times$ curved frame of W 906 for double sided fabric/panel, for installation between 2 frames or 2 extrusions, incl. $2\times C$ 440/F adjustable foot and mounting-set M 1477, incl. hook tape W 840, with $4\times$ internal corner connector W 916 (no mitre needed), with drillings for M 1951 and M 1953, Drillings for cable management possible on request

aluminium | 40 mm, custom size |



- dimensions and accessories have to be stated on order
- **◄** fabric dimension = outer frame dimension

Frames

Frame

for fabric, dividable W 950 × H 2480 × D 40 mm



W 932.01

1 × frame of M 1307 for double sided fabric, dividable in the centre, incl. 2 × C 440/F adjustable foot and 4 × mounting-set M 1477, with 4 × corner connector Z 990, with drillings for M 1951 and M 1953, drillings for cable management possible on request

aluminium | W 950 × H 2480 × D 40 mm | 17.813 lbs



■ fabric dimension = outer frame dimension

Frame


for double sided fabric W 950 × H 2480 × D 40 mm



W 942/E.01

1 × frame of M 1307 for double sided fabric, for mounting on frame or extrusion, incl. 2 × C 440/F adjustable foot and 3 × mounting-set M 1477, with 4 × internal corner connector W 916 (no mitre needed), with drillings for M 1951 and M 1953, drillings for cable management possible on request

aluminium | W 950 \times H 2480 \times D 40 mm | 15.701 lbs



■ fabric dimension = outer frame dimension

Frame

for double sided fabric W 455 × H 2480 × D 40 mm



W 949/E.01

1 × frame of M 1307 for double sided fabric, for mounting on frame or extrusion, incl. 2 × C 440/F adjustable foot and 3 × mounting-set M 1477, with 4 × internal corner connector W 916 (no mitre needed), with drillings for M 1951 and M 1953, drillings for cable management possible on request

aluminium | W 455 \times H 2480 \times D 40 mm | 13.843 lbs



■ fabric dimension = outer frame dimension

Frame


for double sided fabric 40 mm, custom size



W 944/E.01

 $1\times$ frame of M 1307 for double sided fabric, for mounting on frame or extrusion, incl. $2\times C$ 440/F adjustable foot and mounting-set M 1477, with $4\times$ internal corner connector W 916 (no mitre needed), with drillings for M 1951 and M 1953, drillings for cable management possible on request

aluminium | 40 mm, custom size |



- ◄ dimensions and accessories have to be stated on order
- fabric dimension = outer frame dimension


Ceiling element

for fabric L 950 × W 2480 × H 40 mm



1 \times frame of M 1305 used as ceiling element, for fabrics in combination with silicone edge M 1313, incl. 4 \times connector Z 910 for system groove

aluminium | L 950 × W 2480 × H 40 mm | 22.421 lbs



- ▶ For flush mounting of ceiling element: 4 × T-connector W 466
 - **◄** fabric dimension = outer frame dimension



Basic parts

Tension fabric extr.


for double sided fabric / panel L 6000 × W 40 × H 40 mm




W 906.01

for double-sided fabric (in combination with silicone edge M 1313) or panels

aluminium | L 6000 × W 40 × H 40 mm | 13.988 lbs






Tension fabric extr.


for double-sided fabric L 6000 × W 40 × H 40 mm



M 1307.01

for double-sided fabric (with silicone edge M 1313) aluminium \mid L 6000 \times W 40 \times H 40 mm \mid 11.887 lbs






Tension fabric extr.


for double sided fabric L 6000 × W 40 × H 40 mm



M 1305.01

for double sided fabric (with silicone edge M 1313), with 4 grooves to fix fabric, tension lock Z 961/8 can be mounted in 2 positions aluminium | L 6000 \times W 40 \times H 40 mm | 18.153 lbs





Corner upright extrusion


90° corner with silicone edge groove



S 382.01

90°, for connection of OCTAwall 40 frames, fabric can be mounted over the extrusion right to the edge

aluminium | L 5000 × W 40 × H 40 mm | 15.238 lbs





Corner upright

90° corners with silicone edge groove




S 381.01

1 × corner extrusion of S 382, for connection of OCTAwall 40 frames across corners, fabric can be mounted over the extrusion right to the edge, incl. 2 × end cap S 383 and 1 × adjustable foot W 913/1

aluminium | L 40 × W 40 × H 2480 mm | 7.981 lbs





ス Cut length = height - 12 mm

Basic parts

Square extrusion


4 system grooves L 5000 × W 40 × H 40 mm



M 1000.01

for connection on 4 sides, tension lock Z 961/8 can be mounted in 2 positions, with 4 system grooves, groove depth 7 mm aluminium | L 5000 \times W 40 \times H 40 mm | 12.747 lbs






Corner upright


90° with adjustable foot W 913



W 990.01

1 × corner extrusion 90° of M 1000, incl. 1 × adjustable foot W 913 aluminium | L 40 × W 40 × H 2500 mm | 7.055 lbs





Corner upright


90°, dividable with adjustable foot C 430




W 992.01

 $1\times$ corner extrusion 90° of M 1000, divided, for corner connection of frames W 930 and W 932, 2 \times extrusion M 1000, 1 \times internal connector straight Z 978, 1 \times adjustable foot C 430

aluminium | L 40 \times W 40 \times H 2500 mm | 7.275 lbs





Square extrusion


4 system grooves L 6000 × W 40 × H 40 mm



M 1001.01

for connection on 4 sides, tension lock Z 961/8 can be mounted in 2 positions, with 4 system grooves, groove depth 7 mm aluminium | L 6000 \times W 40 \times H 40 mm | 15.366 lbs






Square extrusion

3 system grooves L 6000 × W 40 × H 40 mm



M 1005.01

for connection on 3 sides, tension lock Z 961/8 can be mounted in 2 positions, with 3 system grooves, groove depth 7 mm aluminium | L 6000 \times W 40 \times H 40 mm | 14.691 lbs



Basic parts

Square extrusion


2 system grooves 90° corner



M 1007.01


 $90^{\rm o}$ corner, for connection on 2 sides, tension lock Z 961/8 can be mounted in 2 positions, with 2 system grooves, groove depth 7 mm

aluminium | L 6000 × W 40 × H 40 mm | 15.816 lbs



Angle extrusion


135° corner L 6000 × W 40 × H 50 mm



M 1009.01

135°, for connection on 2 sides, tension lock Z 961/8 can be mounted in 2 positions

aluminium | L 6000 × W 40 × H 50 mm | 17.236 lbs



Double triangular


corner L 6000 × W 40 × H 56 mm



M 1072.01

for corners, for connection on 2 sides, can also be mounted horizontally for wall bracing

aluminium | L 6000 \times W 40 \times H 56 mm | 10.688 lbs



Corner upright extrusion


90° corner, round L 6000 × W 120 × H 120 mm




M 260.01

for connecting extrusions with width 16, 40, 80, 120 mm, OCTAwall pro or OCTAwall 40 frames, fabric can be stretched over the extrusion

aluminium | L 6000 × W 120 × H 120 mm | 56.217 lbs





Fixing set


for M 1307 / M 1304 for frame connection



M 1478.37

for frame connection, quick mounting of extrusion M 1307 and M 1304 to system groove 4.3 \mbox{mm}

steel | L 74 \times W 21.7 \times H 21.7 mm | 0.106 lbs





■ drilling of frames offset

Basic parts

Fixing set


for frame connection L 74 × W 39 × H 39 mm



M 1477.37

for connection of frames W 940 - W 949 / M 1304 / M 1305 and M 1307

steel | L 74 × W 39 × H 39 mm | 0.077 lbs





drilling of frames offset


Fixing set

for frame connection L 100 × W 39 × H 39 mm



M 1496.37

for connection of frame elements steel | L 100 \times W 39 \times H 39 mm | 0.146 lbs





■ drilling of frames at same level

Knuckle


90° for W 906 / M 1307




W 916.39

for connection of 2 fabric tension extrusions, 90°, incl. 2 × screw E 111/m and M 1510/20, for connection of 2 fabric tension extrusions, with thread M 10 for installation of adjustable foot C 440/F

zinc die cast | L 106 × W 106 × H 40 mm | 0.474 lbs





Corner connector


90° lock chamber 21 × 12 mm




Z 990.00

90°, for extrusions with 21 × 12 mm lock chamber, incl. 2 × M10 threads for adjustable foot C 440/F, incl. 2 × hex-star screw E 111 and E 111/20

zinc die cast | L 96 × W 96 × H 12 mm | 0.309 lbs





Corner connector


90° lock chamber 21 × 12 mm




Z 966.00

90°, for lock chamber 21 × 12 mm, with 2 × E 111 and E 111/20 countersunk screw

aluminium | L 90 \times W 90 \times H 8 mm | 0.181 lbs





Basic parts

Corner connector


90° lock chamber 21 × 12 mm



Z 965B.00

90°, for extrusions with lock chamber 21 × 12 mm, incl. 2 × hex-star screw E 111 and E 111/20

zinc die cast | L 55 × W 21 × H 12 mm | 0.168 lbs

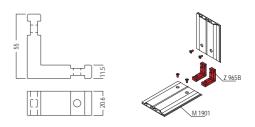

■ steep thread

Internal connector


straight lock chamber 21 × 12 mm



Z 967.00

straight, for extrusions with lock chamber 21 × 12 mm and hole 13 mm dia., incl. 1 × set screw Z 967/20 (M6), 2 × hex-star screw E 111/m (M6), 2 × countersunk screw M 1102/20 (M6) and 2 × washer Z 185

aluminium | L 181 \times W 12 \times H 21 mm | 0.282 lbs

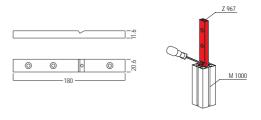

Internal connector


straight, toolless lock chamber 21 × 12 mm




Z 978.90

straight, toolless, for vertical connection of upright extrusions with lock chamber of 21 \times 12 mm and holes 8 mm dia., with push button setting for assembly without tools

aluminium | L 180 × W 21 × H 12 mm | 0.24 lbs





Internal connector


straight, toolless lock chamber 21 × 12 mm



Z 977.90

straight, toolless, for all beam extrusions with lock chamber 21 \times 12 mm and hole 13 mm dia., with push button setting for assembly without tools

aluminium | L 180 × W 21 × H 12 mm | 0.234 lbs

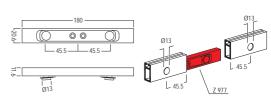

Beam extrusion

for bracing groove depth 7 mm




Z 308.01 | .11

for bracing, tension lock Z 961/13 can be mounted, groove depth 7 $\,$ mm $\,$

aluminium | L 5000 \times W 32 \times H 16 mm | 5.908 lbs





Basic parts

Beam extrusion

2 system grooves L 5000 × W 40 × H 16 mm



Z 4400.01

2 system grooves, tension lock Z 961/13 can be mounted, groove depth 7 $\rm mm$

aluminium | L 5000 × W 40 × H 16 mm | 7.055 lbs



Distance piece


for holes 13 mm



Z 185.01

for 13 mm hole in combination with countersunk screw E 111 aluminium | L 13 x B 0 x H 0 mm |





Tension lock


8 mm L 70 × W 20 × H 12 mm




Z 961/8.00

8 mm, for all beam extrusions with cross- or T-lock chamber 21 \times 12 mm

zinc die cast/steel | L 70 \times W 20 \times H 12 mm | 0.119 lbs







Tension lock

13 mm L 70 × W 21 × H 13 mm





Z 961/13.00

13 mm, for all beam extrusions with lock chamber 21 \times 12 mm as well as in conjunction with adaptor Z 161/A, for beam extrusions with lock chamber 39 \times 12 mm

zinc die cast/steel | L 70 × W 21 × H 13 mm | 0.115 lbs







Accessories

Adjustable foot


M10 for frame elements



C 440/F.37

for installation in frame elements in connection with Z 990 internal corner connector or W 916 corner connector

steel | L 40 × W 40 × H 80.5 mm | 0.161 lbs






Adjustable foot


for uprights 40 × 40 mm L 39 × W 39 × H 34 mm



W 913.37

for extrusions M 1000 / M 1001 / M 1005 and M 1007 steel | L 39 \times W 39 \times H 34 mm | 0.146 lbs





Adjustable foot


135° corner for upright M 1009



C 441.37

for exterior corner extrusion M 1009, 135°, incl. 2 \times set screw M 1075/20 (M4)

steel, zinc plated | L 53 \times W 39 \times H 80 mm | 0.348 lbs



Base plate


side L 495 × W 170 × H 301 mm




M 1941.21

for free standing frames made of extrusions M 1304, M 1305, M 1307, W 906, for side mounting and additional connecting to bottom beam, incl. 1 \times mounting parts M 1951BS, max. frame height = 2000 mm

steel | L 495 × W 170 × H 301 mm | 11.768 lbs





■ Suitable for both left and right side

Base plate

middle L 495 × W 170 × H 12 mm




M 1943.21

for free standing frames made from extrusions M 1304, M 1305, M 1307, M 1308, W 906, additional center base plate for connecting to bottom beam, incl. 1 \times mounting parts M 1953BS, max. frame height = 2000 mm

steel | L 495 × W 170 × H 12 mm | 9.987 lbs





▶ Attention: for use only with M 1941, M 1942

Accessories

Base plate


side L 600 × W 250 × H 301 mm




M 1951.21

for free standing frames made from extrusions M 1304, M 1305, M 1307, W 906, for side mounting and additional connecting to bottom beam, incl. 1 \times mounting parts M 1951BS, max. frame height = 2500 mm

steel | L 600 × W 250 × H 301 mm | 18.629 lbs





■ Suitable for both left and right side

Base plate

middle L 600 × W 250 × H 12 mm




M 1953.21

for free standing frames made from extrusions M 1304, M 1305, M 1307, W 906, additional center base plate for connecting to bottom beam, incl. 1 \times mounting parts M 1953BS, max. frame height = 2500 mm

steel | L 600 × W 250 × H 12 mm | 16.848 lbs





Attention: for use only with M 1951, M 1952

Base plate


side L 320 × W 250 × H 301 mm




M 1961.21

for free standing frames made from extrusions M 1304, M 1305, M 1307, W 906, for side mounting and additional connecting to bottom beam, off set for mounting close to walls, incl. 1 \times mounting parts M 1951BS, max. frame height = 2500 mm

steel | L 320 × W 250 × H 301 mm | 11.466 lbs






■ Suitable for both left and right side

Base plate

middle L 320 × W 250 × H 12 mm




M 1963.21

for free standing frames made from extrusions M 1304, M 1305, M 1307, W 906, additional center base plate for connecting to bottom beam, off set for mounting close to walls, incl. 1 \times mounting parts M 1953BS, max. frame height = 2500 mm

steel | L 320 × W 250 × H 12 mm | 9.685 lbs





■ Attention: for use only with M 1961


Threaded plate


for C 440/F L 25 × W 12 × H 21 mm



W 917.00

to hold adjustable foot C 440/F in frame extrusions M 1307 aluminium | L 25 \times W 12 \times H 21 mm | 0.051 lbs





Accessories

End cap


for extrusion S 382 L 40 × W 40 × H 6 mm




S 383.35

for extrusion S 382, to build the upper and lower piping groove on the edge $\,$

plastic | L 40 × W 40 × H 6 mm | 0.009 lbs






End cap


for extrusions 40 × 40 mm L 40 × W 40 × H 12 mm



M 1014.35

for all square extrusions 40 mm plastic, light grey | L 40 \times W 40 \times H 12 mm | 0.009 lbs





End plate


for 80 mm extrusions for M 260




M 261.21

for Quarter-round extrusion M 260 in connection with 80 mm extrusions, to create top and bottom horizontal fabric groove, with drilling 11 mm dia. for adjustable foot

steel | L 120 \times W 120 \times H 6 mm | 0.739 lbs






End plate


for 120 mm extrusions for M 260



M 271.21

for Quarter-round extrusion M 260 in connection with 120 mm extrusions, to create top and bottom horizontal fabric groove steel \mid L 120 × W 120 × H 6 mm \mid 0.992 lbs





Cover extrusion

for extrusions 40 mm L 5000 × W 40 × H 5 mm




W 910.01

to clad the system groove, for frame elements with 40 mm, incl. 10 \times plastic clip E 470/C

aluminium | L 5000 \times W 40 \times H 5 mm | 2.954 lbs





Recommendation: 2 x E 470/C per meter

Accessories

Clip

for E 470/N / E 471/N L 10 × W 9 × H 7 mm




E 470/C.30

to put into extrusion E 470/N / E 471/N, recommendation: 4 pieces / running meter for extrusion C 722, 2 pieces / running meter for extrusion W 910

plastic | L10 × W9 × H7 mm |






Monitor mount

VESA standard for frame W 950-990 mm



W 464.37

for OCTAwall 40 frames with a width of 950 to 990 mm, for monitors with VESA standard 75 \times 75 to 700 \times 400 mm, for mounting of monitors to long holes, incl. 1 \times tool E 114 for mounting aluminium/steel | L 870-910 \times W 30 \times H 500 mm | 18.078 lbs





Attention: max. monitor weight 30 kg

Magnet fixing beam

for frame width 950 mm for W 478 / W 476



W 472.37

for toolless installation of literature rack W 478 and shelf W 476 to frames, 1 × steel sheet E 472-A with 4 × hammerhead screw (M 1348/Ha) and 4 × knurled nut (E 735/t)

steel | L 870 × W 19 × H 125 mm | 3.217 lbs





■ Attention: for frame width 950 mm

Magnet


for magnet fixing beam W 472 36 mm dia.



W 474.37

for mounting of literature rack W 478 and shelf W 476 to beam W 472, incl. 1 \times hammerhead screw M 474–HA (M8) and 1 \times washer M 1435–40 (M8)

neodyme/steel | 36 mm dia. | 0.139 lbs





Brochure shelf

max. 2 kg for magnet fixing beam W 472



W 478.20

for fast mounting to beam W 472, incl. 2 × magnet W 474, mounted behind fabric

steel | W 220 × H 304 mm | 3.666 lbs





→ Attention: max load capacity 2 kg!

Accessories


Shelf

max. 2 kg for magnet fixing beam W 472

W 476.20

for fast mounting to beam W 472, incl. 2 \times magnet W 474, mounted behind fabric

steel | L 310 \times W 220 \times H 90 mm | 3.477 lbs

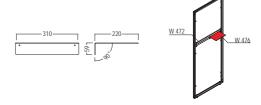




Internal connector


with 2 × Z 961/13 L 62 × W 16 × H 50 mm



Z 910.01

beam extrusion Z 402, to be used as shortest connection element between two extrusions, incl. 2 × built-in tension lock Z 961/13 aluminium | L 62 × W 16 × H 50 mm | 0.353 lbs





Extrusion connector

for system groove 4.3 mm L 5000 × W 10 × H 10 mm




E 438.30

for connection of 2 aluminium extrusions in parallel alignment, suitable for extrusions with a narrow mounting chamber (8.7 mm min.), for system groove 4.3 mm

plastic, semi-hard | L 5000 × W 10 × H 10 mm | 0.611 lbs





Safety parts

Reinforcing plate


for frame or ceiling element L 170 × W 200 × H 4 mm



W 466.37

for mounting of riser panel or ceiling element, incl. 4 \times hammerhead screw E 200 (M5) and 4 \times knurled screws W 466-30 (M5)

steel | L 170 × W 200 × H 4 mm | 0.679 lbs





Doors

Sliding door


opening W 950 × H 2500 mm W 1975 × H 2500 × D 80 mm



W 420.01

 $1\times$ door element made of W 906 for fabric and panel on both sides, can be attached toolfree to the system groove of the OCTAwall 40 frame with hammer head screws, for installation in opening with clear dimensions W 950 x H 2500 mm, sliding door dimensions W 990 x H 2480 x D 40 mm

aluminium | W 1975 × H 2500 × D 80 mm | 17.855 lbs



■ fabric dimension = outer frame dimension

Door

Set DIN left/right




W 425-SET.01

 $1\times$ door ement of M 1305/W 906, for double-sided fabric/panel, universal for DIN left/right, consisting of door leaf frame, door upright frame incl. threshold plate and door roof frame, with hook tape W 840, with dead lock cylinder W 514, outer frame dimension door leaf frame: 855 \times 2021 mm, outer frame dimension door frame (top): 870 \times 450 mm

aluminium/steel | W 950 \times H 2500 \times D 40 mm | 41.275 lbs





■ Attention: Only use silicone edge 12 × 3 mm for doorleafframe!

▼ fabric dimension = outer frame dimension

Door

DIN left/right 40 mm, custom size





W 425SO.01

 $1\times$ door ement of M 1305/W 906, for double-sided fabric/panel, universal for DIN left and DIN right, consisting of door leaf frame, door upright frame and door roof frame, with hook tape W 840, without dead lock cylinder W 514

aluminium/steel | 40 mm, custom size |

■ fabric dimension = outer frame dimension





Window element

for door W 425 / W 575 W 775 × H 1941 × D 40 mm




W 414.01

1 × window element made of W 906 for double sided fabric/panel, in addition to door element W 425 and W 575, Window size: W $200 \times \text{H}$ 800 mm

→ Attention: Only use silicone edge 12 × 3 mm for door leaf frame!

aluminium | W 775 \times H 1941 \times D 40 $\,$ mm | 10.944 lbs





Door cylinder


for W 425 / W 575 / W 805 L 61 × W 42 × H 28 mm



W 514.38

1 × dead lock cylinder, for mounting into door W 425 / W 575 / W 805, incl. 3 × key W 514/S

steel | L 61 × W 42 × H 28 mm | 0.489 lbs



Fabric/Panel/Glass

Silicone edge


100 meter roll for fabric



M 1313.50

for mounting fabric to all tension fabric extrusions, 100 m roll silicone | W 14 \times H 3 mm | 11.332 lbs






Hook tape

50 meter roll for mounting of panels



W 840.30

for mounting of panels, polyamide, white, self-adhesive, 50 m roll polyamide | W 20 \times H 2 mm | 1.415 lbs





Loop tape

25 meter roll for mounting of panels



W 841.30

for mounting of panels, white, self-adhesive, 25 m roll polyamide | W 20 \times H 2 mm | 0.862 lbs





Hinges


Hinged extrusion

90°-180° angle L 5000 × W 40 × H 40 mm



W 908.01

two parts, for stepless angle (90°–180°) aluminium | L 5000 × W 40 × H 40 mm | 12.35 lbs





Electrical parts

Wallwasher


LED / 28W / 230V L 812 × W 166 × H 263 mm



M 1497.31 | .33

for uniform illumination of 1000 mm width and 2500 mm height (5700 Kelvin > Cri 90, 3600 lm, 28 W, 125 lm/W), for 230 V power source, for system groove 4.3 mm, space-saving and securely packed, with 16 high-power LEDs, PSU incl. cable (500 mm to lamp and 2500 mm from power supply)

aluminium | L 812 \times W 166 \times H 263 mm | 4.5 lbs



Hanging lamp


LED / 56W / 230V L 818 × W 150 × H 35 mm



M 1497-H.33


for a homogenous illumination in 5700K > Cri 90, with 32 highpower LEDs, 7200 lm, 56 W, 128 lm/W, for 230 V, incl. 3.5 m wire rope with 2 \times Reutlinger wire rope holders to adjust height, 2 \times plastic end caps black, 1 \times power supply unit incl. DC distributor, 3 m extension cable with DC connector

aluminium, matt powder-coated | L 818 \times W 150 \times H 35 mm | 5.489 lbs




Power supply

for wallwasher M 1497 L 1175 × W 72 × H 35 mm



M 1497-11.90

for wallwasher M 1497, converter with 24V, 6.67A, 160W, rated voltage AC 100-240V, 50/60Hz, cable 1000 mm long plastic | L 1175 \times W 72 \times H 35 mm | 1.407 lbs



■ Attention: suitable power cord M 1497-12 is required


Cable

for wallwasher M 1497 2500 mm long



M 1497-12.90

for wallwasher M 1497, power cord CEE 7/7 - C13 plastic, black | 2500 mm long | 0.571 lbs



Extension cable


for wallwasher M 1497 3000 mm long



M 1497-1.33

cable for connecting M 1497 wallwashers, with angled barrel connector at both ends

plastic, black | 3000 mm long | 0.282 lbs



Electrical parts


PWM Dimmer

for wallwasher M 1497 L 150 × W 40 × H 20 mm



M 1497-4.90

1 × control unit and remote control for dimming of max. 5 wallwasher M 1497, DC 12–24 V, 2.4 GHz, PWM frequency 1.95 KHz plastic | L 150 × W 40 × H 20 mm | 0.227 lbs



Cable


Y-Splitter for wallwasher M 1497



M 1497-3.90

Y-cable for connecting up to 5 \times wallwasher M 1497, with barrel connector at all ends

plastic, black | 300 mm long | 0.09 lbs

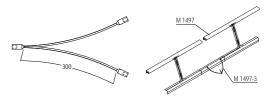

Long-arm floodlight


25 W L 490 × W 232 × H 40 mm



M 1494.31 | .33

for swivel mounting in system groove, incl. adapter plate and connection cable 3 m, 25 W, 2500 lm, 4000 K, voltage input: 100-240 VAC, voltage output: 27-35 VDC, color rendering index: 80+ CRI, beam angle: 120°

aluminium | L 490 × W 232 × H 40 mm | 1.675 lbs



■ without connecting cable M 1494-xxxx

Connecting cable


for M 1494 1000 mm long



M 1494-1000.33

 $230\mathrm{V}$ connecting cable for IEC C13 connections, one side plug, one side socket, can also be used as an extension

rubber | 1000 mm long | 0.254 lbs





OCTAwall pro

Weitere Abmessungen:

M 1494-2000.33 M 1494-3000.33 2000 mm lang 3000 mm lang 0.507 lbs 0.772 lbs

Electrical parts


Long-arm floodlight


LED / 12W / 230V L 535 × W 119 × H 250 mm



M 1498.31

for voltage 100 - 230 V, for mounting in system groove 4.3 mm, 12 W / 230 V, 4000 K, 960 lm, incl. 1 × M 1481 retainer, 1 × cable 3000 mm, with integrated transformer and screwed on safety glass aluminium | L 535 × W 119 × H 250 mm | 1.354 lbs






Retainer

for long-arm floodlight M 1498 L 26 × W 35 × H 16 mm



M 1481.01

for installation in 4.3 mm system groove (extrusion top face) can be used in combination with long-arm spot light M 1480 / M 1499 aluminium | L 26 \times W 35 \times H 16 mm | 0.031 lbs





Cable retaining


small for system groove 4.3 mm



E 460.35

small, for mounting of cables to system groove plastic, semi-hard | L 5000 \times W 16 \times H 20 mm | 1.609 lbs





Cable protection


for extrusion M 1307 L 52 × W 9 × H 40 mm




W 995.35

for extrusion M 1307, to protect cables from damage during installation, for cables without plug, installation in OCTAwall 40 frames

plastic | L 52 × W 9 × H 40 mm | 0.022 lbs







Cable protection


for extrusion W 906 L 52 × W 17 × H 24 mm





W 996.35

to protect cables from damage during installation, for cables with plug, installation in OCTAwall 60 frames $\,$

plastic | L 52 \times W 17 \times H 24 mm | 0.015 lbs







Packing/Transport


Transport bag

for 2 × M 1951 / M 1953 L 620 × W 50 × H 270 mm



W 927.90

for 2 × foot plate M 1951 or M 1953, with inner partition nylon, blue | L $620 \times W$ 50 × H 270 mm | 4.85 lbs



Distance piece

for OCTAwall frames L 51.5 × W 51.5 × H 14 mm




W 1000.90

to fix frames during packaging, storage and transport, suitable for all OCTAwall frame systems

plastic, red | L 51.5 × W 51.5 × H 14 mm | 0.02 lbs





Pallet


for frames W 950 mm L 2550 × W 1010 × H 125 mm



W 2020-P.90

Packing, storing and transport, suitable for all OCTAwall frames width 950 mm

wood | L 2550 × W 1010 × H 125 mm | 68.343 lbs

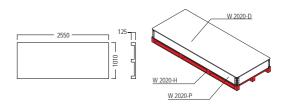

Stacking frame


for frames W 950 mm L 2550 × W 1050 × H 200 mm



W 2020-H.90

Packing, storing and transport, suitable for all OCTAwall frames width 950 \mbox{mm}

wood/steel | L 2550 \times W 1050 \times H 200 mm | 30.423 lbs

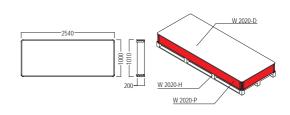

Stacking frame cover


for frames W 950 mm L 2550 × W 1050 × H 15 mm




W 2020-D.90

Packing, storing and transport, suitable for all OCTAwall frames width 950 mm

wood | L 2550 × W 1050 × H 15 mm | 31.967 lbs

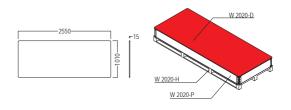

octawall 40 tooless

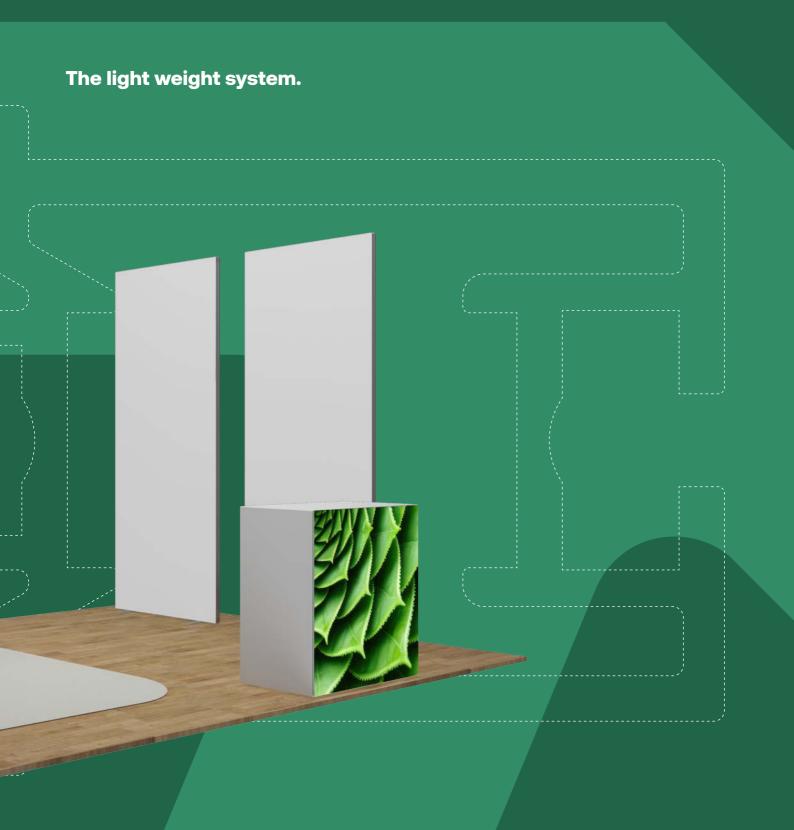

尽 octawall 40 toolless

Index

7 TECHNICAL FEATURES

尽 OVERVIEW

7 COMPONENTS

₹ Frames	291
7 Basic parts	292
→ Accessories →	294
⊅ Doors	295
↗ Fabric/Panel/Glass	296
ュ Packaging/Transport	297



Technical features



lightweight



fabric + panel W 906



silicone edge graphics



plugable connection



shoulder bag

Quick and easy - of course you can have both.

Unpack. Plug together. Done. Thanks to the new spring mechanism, the **octawall 40 toolless** frame is set up in no time at all. Firmly screwed to the extrusion on one side, the connector snaps in on the other with a *click*. Easy and time saving – a completely toolless installation.

Everything within your grasp thanks to a handy bag.

Many changes of location within a very short time? The shoulder bag accompanies you wherever you go. It holds all extrusions required for one frame, safely rolled up and protected against scratches. No more forgotten parts or transport problems.

Main application: everything.

Trade fairs, events, POS, or exhibitions: **octawall 40 toolless** can be used for all kinds of decorative or presentation purposes – even in combination with **octalumina 40** and **maxima 40**.

Today fabric - tomorrow panel.

The high quality hook and loop tape impresses with the safe and toolless installation of the panels. The well-proven system groove and silicone edge system adds tension to your fabric. Together, they offer a modern surface look and utmost flexibility.












Basic parts












M 1477






































Frames

Frame


toolless W 950 × H 2480 × D 40 mm



W 402M.01

1 × frame of W 906, for double-sided fabric, with plugable connection, center-split, incl. 2 × rotatable foot plates M 1956 and 1 × bracing, incl. 1 × shoulder bag W 494, 4 × corner connector W 916M, 2 × connector OL 240M, 3 × mounting-set M 1496, Drillings for cable management available on request

aluminium | W 950 × H 2480 × D 40 mm | 19.687 lbs



- Attention: freestanding only for double-sided fabric!
- fabric dimension = outer frame dimension

Frame


toolless 40 mm, custom size



W 403M.01

1 × frame of W 906, for double-sided fabric, with plugable connection, center-split, incl. 2 × rotatable foot plates M 1956 and 1 × bracing, incl. 1 × shoulder bag W 494, 4 × corner connector W 916M, 2 × connector OL 240M, 3 × mounting-set M 1496, Drillings for cable management available on request, fabric dimension = outer frame dimension


aluminium | 40 mm, custom size |



- Attention: freestanding only for double-sided fabric!
- **x** X = 495-1200 mm, Y = 1000-2500 mm

Frame


toolless W 950 × H 2480 × D 40 mm



W 412M.01

 $1\times$ frame of W 906, for double-sided fabric/panel, with plugable connection, center-split, incl. $2\times$ adjustable foot C 440/F and $1\times$ bracing, incl. $1\times$ shoulder bag W 494, $4\times$ corner connector W 916M, $2\times$ connector OL 240M, $3\times$ mounting-set M 1496, optional with hook tape W 840, Drillings for cable management available on request

aluminium | W 950 \times H 2480 \times D 40 mm | 17.879 lbs



■ fabric dimension = outer frame dimension

Frame


toolless 40 mm, custom size



W 413M.01

 $1\times$ frame of W 906, for double-sided fabric/panel, with plugable connection, center-split, incl. $2\times$ adjustable foot C 440/F6 and $1\times$ bracing, incl. $1\times$ shoulder bag W 494, $4\times$ corner connector W 916M, $2\times$ connector OL 240M, $3\times$ mounting-set M 1496, optional with hook tape W 840, Drillings for cable management available on request

aluminium | 40 mm, custom size |



- **x** X = 495-1200 mm, Y = 1000-2500 mm
- fabric dimension = outer frame dimension

Basic parts

Tension fabric extr.


for double sided fabric / panel L 6000 × W 40 × H 40 mm




W 906.01

for double-sided fabric (in combination with silicone edge M 1313) or panels


aluminium | L 6000 × W 40 × H 40 mm | 13.988 lbs





Corner upright extrusion


90° corner with silicone edge groove




S 382.01

 $90^{\circ}\!,$ for connection of OCTAwall 40 frames, fabric can be mounted over the extrusion right to the edge

aluminium | L 5000 × W 40 × H 40 mm | 15.238 lbs





Corner upright

silicone edge groove 90°, toolless




S 381M.01

1 x upright of 40 mm corner upright extrusion S 382, toolless, separated with longitudinal connector S381M3 , fabric can be mounted over the profile onto the edge, incl. 2 × end cap S 383 and 1 × adjustable foot W 913/1

aluminium | L 40 \times W 40 \times H 2480 mm | 7.892 lbs





Fixing set

for frame connection L 100 × W 39 × H 39 mm




M 1496.37

for connection of frame elements steel | L 100 \times W 39 \times H 39 mm | 0.146 lbs







drilling of frames at same level

Fixing set


for frame connection L 74 × W 39 × H 39 mm



M 1477.37

for connection of frames W 940 - W 949 / M 1304 / M 1305 and M 1307

steel | L 74 × W 39 × H 39 mm | 0.077 lbs





■ drilling of frames offset

Basic parts


Knuckle

90°, toolless L 106 × W 106 × H 40 mm



W 916M.39

for pluggable and dismountable connections, bolted on one side zinc die cast | L 106 \times W 106 \times H 40 mm | 0.472 lbs



Internal connector


straight, toolless L 180 × W 20.6 × H 11.6 mm




OL 240M.00

for pluggable and dismountable connections, bolted on one side, incl. 1 × countersunk-head screw E 111/m, 1 × countersunk-head screw M 1510/20

aluminium | L 180 \times W 20.6 \times H 11.6 mm | 0.273 lbs





Accessories

Adjustable foot


M10 for frame elements



C 440/F.37

for installation in frame elements in connection with Z 990 internal corner connector or W 916 corner connector

steel | L 40 × W 40 × H 80.5 mm | 0.161 lbs





Base plate


toolless rotatable



M 1956.21

rotatable, for freestanding frame elements toolless, incl. fixing accessories

steel | L 301 × W 50 × H 12 mm | 1.093 lbs

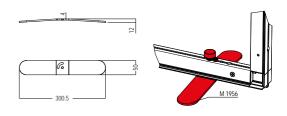

End cap


for extrusion \$ 382 L 40 × W 40 × H 6 mm




S 383.35

for extrusion S 382, to build the upper and lower piping groove on the edge $\,$

plastic | L 40 \times W 40 \times H 6 mm | 0.009 lbs





Doors

Door


set
DIN left/right, toolless




W 425M-SET.01

 $1\times$ door element of M 1305/W 906, for double-sided fabric/panel, plug-in connection (middle), for DIN left/right, consisting of door leaf frame – door upright frame incl. threshold plate and door upperframe, with dead lock cylinder W 514, optional: transport bag W 425, hook tape W 840, outer dimension door leaf frame: 855 \times 2021 mm, outer dimension door frame (top): 870 \times 450 mm

aluminium/steel | W 950 × H 2500 × D 40 mm | 45.684 lbs





- **◄** Attention: Only use silicone edge 12 × 3 mm for doorleafframe!
- fabric dimension = outer frame dimension

Window element


for door W 425 / W 575 W 775 × H 1941 × D 40 mm




W 414.01

1 × window element made of W 906 for double sided fabric/panel, in addition to door element W 425 and W 575, Window size: W $200 \times \rm{H}~800~mm$

aluminium | W 775 × H 1941 × D 40 mm | 10.944 lbs





Door cylinder


for W 425 / W 575 / W 805 L 61 × W 42 × H 28 mm



W 514.38

1 × dead lock cylinder, for mounting into door W 425 / W 575 / W 805, incl. 3 × key W 514/S

steel | L 61 × W 42 × H 28 mm | 0.489 lbs



Transport fixation


left for door W 425M



W 417M.20

Transport fixation for door element W 425M, consisting of 1 × W 417-oZ and 2 × M6 knurled screw W 464-21

aluminium/steel | L 90 × W 38 × H 33 mm | 0.212 lbs





Transport fixation


right for door W 425M



W 418M.20

Transport fixation for door element W 415M, consisting of W 417-oZ and 2 \times M6 knurled screw W 464-21

aluminium/steel | L 93 × W 38 × H 33 mm | 0.223 lbs





Fabric/Panel/Glass

Silicone edge


100 meter roll for fabric



M 1313.50

for mounting fabric to all tension fabric extrusions, 100 m roll silicone | W 14 \times H 3 mm | 11.332 lbs






Hook tape

50 meter roll for mounting of panels



W 840.30

for mounting of panels, polyamide, white, self-adhesive, 50 m roll polyamide | W 20 \times H 2 mm | 1.415 lbs





Loop tape

25 meter roll for mounting of panels



W 841.30

for mounting of panels, white, self-adhesive, 25 m roll polyamide | W 20 \times H 2 mm | 0.862 lbs






Packaging/Transport

Transport bag

rolled for OCTAwall 40 toolless

W 494.90

 $1\times$ shoulder bag with hook-and-loop tape for closing, for OCTAwall 40 toolless, incl. adjustable shoulder strap nylon, black | L 1400 \times W 900 \times H 5 mm | 6.834 lbs






octawall pro fabric, panel, LED

Tapric, panel, LED

The multimedia talent with a system.

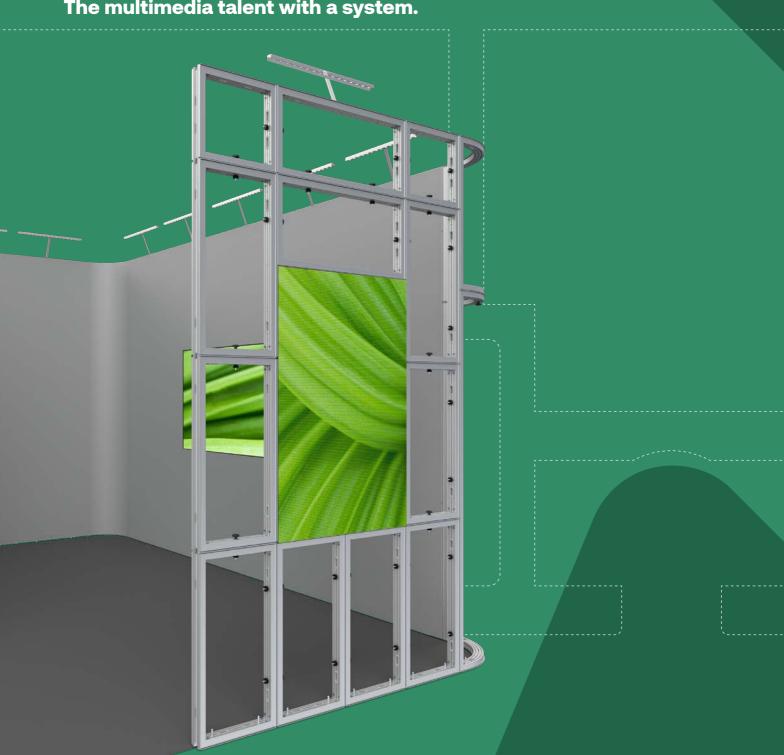

Index

7 TECHNICAL FEATURES	300
对 OVERVIEW	302
7 COMPONENTS	
→ Frames	305
7 Basic parts	310
Accessories Acces	314
⊿ Doors	317
□ LED/Fabric/Panel	319
	322
¬ Packaging/Transport	325
⊿ Sets	326









Technical features



internal cabling



integration of LED panels



80 mm extrusion for fabric + panel



combinable with 40 mm system



quick connector



cladding panels



curved walls



rounded corner



silicone edge graphics



almost seamless fabric corner

Ready for content: the multimedia talent.

Vivid images and radiant colors: Flush-mounted LED panels and monitors add highlights to every exhibition booth. Thanks to the standardized frame dimensions, large-scale LED video walls and monitors can be integrated. The fabric spans all the way to the edge of the frame to create a consistent overall appearance.

Unbeatable in combination.


As usual, **octawall pro** can be easily combined with other **octanorm** systems such as **octalumina** light frames or **maxima**. With the double groove as a special feature, **octawall 40** frames can be mounted flush with the system. Thanks to this versatility, every booth design becomes something special.

Curved frames for more freedom.

Curved frames and rounded corner uprights with wrap-around fabric graphics – completely seamless. This creates maximum advertising space without any interruptions from extrusions. Rooms are given a whole new look and feel. Not only on the outside, but also on the inside. **octawall pro**, equipped with acoustic fabric, can also be used as a meeting room or a place of retreat.

Time-saving assembly.

To make assembly and disassembly quick and easy, the frames can be attached to each other completely without tools. Specially designed quick connectors ensure a tight connection and you can forget about losing small parts.

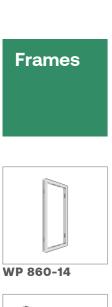




















































































WP 2450



WP 2460



WP 85-4




WP 80-9








E 196



WP 830



WP 830-248








W 805-SET



W 809



W 575-SET



W 575SO



W 575-080



W 514





WP 80-5



WP 80-6



WP 80-7



WP 80-56



M 1313



W 840



W 841



WP 891



WP 890-2480



WP 895




WP 892



WP 893







OL 3100



OL 3200





M 1497







M 1497-12





M 1497-4



M 1497-3



M 1494



M 1494-1000



M 1494-2000




M 1494-3000



WP 85-8







W 2020-P



W 2020-H



W 2020-D





WP-SET 1



WP-SET 2

Frames

Frame

for double sided fabric / panel W 950 × H 2480 × D 80 mm




WP 860-11.01

1 × frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with 30 × drill hole for quick connector WP 80–1 or WP 80–2, 8 × threaded hole for adjustable foot WP 80–3 and 8 × outlet for passing cables incl. protection WP 85–8

aluminium | W 950 × H 2480 × D 80 mm | 29.727 lbs





- Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.
- ▼ fabric size = outer frame dimension

Frame

for double sided fabric / panel W 435 x H 2480 x D 80 mm




WP 860-12.01

1 × frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with 20 × drill hole for quick connector WP 80-1 or WP 80-2, 8 × threaded hole for adjustable foot WP 80-3 and 8 × outlet for passing cables incl. protection WP 85-8

aluminium | W 435 × H 2480 × D 80 mm | 25.137 lbs





- Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.
- ▼ fabric size = outer frame dimension

Frame

for double sided fabric / panel W 950 × H 1500 × D 80 mm




WP 860-10.01

1 × frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with 20 × drill hole for quick connector WP 80–1 or WP 80–2, 8 × threaded hole for adjustable foot WP 80–3 and 8 × outlet for passing cables incl. protection WP 85–8

aluminium | W 950 \times H 1500 \times D 80 mm | 26.552 lbs





- Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.
- fabric size = outer frame dimension

Frame


for double sided fabric / panel W 435 × H 1500 × D 80 mm



WP 860-13.01

1 × frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with 10 × drill hole for quick connector WP 80–1 or WP 80–2, 8 × threaded hole for adjustable foot WP 80–3 and 8 × outlet for passing cables incl. protection WP 85–8

aluminium | W 435 × H 1500 × D 80 mm | 19.841 lbs





- Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.
- fabric size = outer frame dimension

Frame


for double sided fabric / panel W 950 × H 1000 × D 80 mm




WP 860-9.01

 $1\times$ frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with $24\times$ drill hole for quick connector WP 80-1 or WP 80-2, $8\times$ threaded hole for adjustable foot WP 80-3 and $8\times$ outlet for passing cables incl. protection WP 85-8

aluminium | W 950 × H 1000 × D 80 mm | 23.735 lbs





- → Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.
- fabric size = outer frame dimension

Frames

Frame


for double sided fabric / panel W 435 × H 1000 × D 80 mm



WP 860-14.01

1 × frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with 14 × drill hole for quick connector WP 80-1 or WP 80-2, 8 × threaded hole for adjustable foot WP 80-3 and 8 × outlet for passing cables incl. protection WP 85-8

aluminium | W 435 × H 1000 × D 80 mm | 17.046 lbs





- → Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.
- fabric size = outer frame dimension

Frame

for double sided fabric / panel W 950 × H 500 × D 80 mm




WP 860-8.01

1 × frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with 16 × drill hole for quick connector WP 80-1 or WP 80-2, 8 × threaded hole for adjustable foot WP 80-3 and 8 × outlet for passing cables incl. protection WP 85-8

aluminium | W 950 \times H 500 \times D 80 mm | 18.166 lbs





- Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.
- ▼ fabric size = outer frame dimension

Frame


for double sided fabric / panel W 435 × H 500 × D 80 mm



WP 860-15.01

1 × frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with 6 × drill hole for quick connector WP 80–1 or WP 80–2, 8 × threaded hole for adjustable foot WP 80–3 and 8 × outlet for passing cables incl. protection WP 85–8

aluminium | W 435 \times H 500 \times D 80 mm | 11.455 lbs





- ¬ Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.
- ▼ fabric size = outer frame dimension

Frame


for double sided fabric / panel W 950 × H 480 × D 80 mm



WP 860-7.01

 $1\times$ frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, above door, with 18 \times drill hole for quick connector WP 80-1 or WP 80-2, 8 \times threaded hole for adjustable foot WP 80-3 and 8 \times outlet for passing cables incl. protection WP 85-8

aluminium | W 950 × H 480 × D 80 mm | 18.166 lbs





- Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.
- fabric size = outer frame dimension

Frame


for double sided fabric / panel W 435 × H 480 × D 80 mm



WP 860-16.01

 $1\times$ frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with $8\times$ drill hole for quick connector WP 80-1 or WP 80-2, $8\times$ threaded hole for adjustable foot WP 80-3 and $8\times$ outlet for passing cables incl. protection WP 85-8

aluminium | W 435 × H 480 × D 80 mm | 11.455 lbs





- Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.
- fabric size = outer frame dimension

Frames

LED adjustment frame

for double sided fabric / panel W 1500 × H 500 × D 80 mm




WP 860-6.01

1 × frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with 16 × drill hole for quick connector WP 80–1 or WP 80–2, 8 × threaded hole for adjustable foot WP 80–3 and 8 × outlet for passing cables incl. protection WP 85–8

aluminium | W 1500 \times H 500 \times D 80 mm | 20.961 lbs





- Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.
- fabric size = outer frame dimension

LED adjustment frame

for double sided fabric / panel W 1000 × H 500 × D 80 mm




WP 860-5.01

1 × frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with 20 × drill hole for quick connector WP 80-1 or WP 80-2, 8 × threaded hole for adjustable foot WP 80-3 and 8 × outlet for passing cables incl. protection WP 85-8

aluminium | W 1000 \times H 500 \times D 80 mm | 18.166 lbs





- → Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.
- ▼ fabric size = outer frame dimension

LED adjustment frame


for double sided fabric / panel W 500 × H 500 × D 80 mm



WP 860-4.01

1 × frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with 12 × drill hole for quick connector WP 80–1 or WP 80–2, 8 × threaded hole for adjustable foot WP 80–3 and 8 × outlet for passing cables incl. protection WP 85–8

aluminium | W 500 \times H 500 \times D 80 mm | 12.575 lbs





- Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.

LED adjustment frame


for double sided fabric / panel W 1500 × H 480 × D 80 mm




WP 860-3.01

1 × frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with 18 × drill hole for quick connector WP 80–1 or WP 80–2, 8 × threaded hole for adjustable foot WP 80–3 and 8 × outlet for passing cables incl. protection WP 85–8

aluminium | W 1500 \times H 480 \times D 80 mm | 20.961 lbs





- Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.
- fabric size = outer frame dimension

LED adjustment frame

for double sided fabric / panel W 1000 × H 480 × D 80 mm



WP 860-2.01

 $1\times$ frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with 22 × drill hole for quick connector WP 80–1 or WP 80–2, 8 × threaded hole for adjustable foot WP 80–3 and 8 × outlet for passing cables incl. protection WP 85–8

aluminium | W 1000 × H 480 × D 80 mm | 18.166 lbs





- Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.
- ▼ fabric size = outer frame dimension

Frames

LED adjustment frame


for double sided fabric / panel W 500 × H 480 × D 80 mm



WP 860-1.01

1 × frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with 14 × drill hole for quick connector WP 80–1 or WP 80–2, 8 × threaded hole for adjustable foot WP 80–3 and 8 × outlet for passing cables incl. protection WP 85–8

aluminium | W 500 \times H 480 \times D 80 mm | 12.575 lbs



- → Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.
- ▼ fabric size = outer frame dimension

frame element curved


for double sided fabric / panel W 515 × H 2480 × D 515 mm



WP 860-C5.01

 $1\times$ curved frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with $22\times$ drill hole for quick connector WP 80-1 or WP 80-2, $8\times$ threaded hole for adjustable foot WP 80-3 and $4\times$ lateral outlet for passing cables incl. protection WP 85-8, without hook tape W 840 and loop tape W 841, optional: central cable outlet

aluminium | W 515 \times H 2480 \times D 515 mm | 35.794 lbs



- When combining several curved frames, deviations may occur at the joints.
- ▼ fabric dimension see technical info

frame element curved


for double sided fabric / panel W 515 × H 1500 × D 515 mm



WP 860-C4.01

 $1\times$ curved frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with $12\times$ drill hole for quick connector WP 80–1 or WP 80–2, $8\times$ threaded hole for adjustable foot WP 80–3 and $4\times$ lateral outlet for passing cables incl. protection WP 85–8, without hook tape W 840 and loop tape W 841, optional: central cable outlet

aluminium | W 515 × H 1500 × D 515 mm | 21.817 lbs



- When combining several curved frames, deviations may occur at the joints.
- fabric dimension see technical info

frame element curved


for double sided fabric / panel W 515 × H 1000 × D 515 mm



WP 860-C3.01

 $1\times$ curved frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with 16 \times drill hole for quick connector WP 80-1 or WP 80-2, 8 \times threaded hole for adjustable foot WP 80-3 and 4 \times lateral outlet for passing cables incl. protection WP 85-8, without hook tape W 840 and loop tape W 841, optional: central cable outlet

aluminium | W 515 \times H 1000 \times D 515 mm | 19.021 lbs



- When combining several curved frames, deviations may occur at the joints.
- fabric dimension see technical info

frame element curved


for double sided fabric / panel W 515 × H 500 × D 515 mm



WP 860-C2.01

 $1 \times$ curved frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with $8 \times$ drill hole for quick connector WP 80-1 or WP 80-2, $8 \times$ threaded hole for adjustable foot WP 80-3 and $4 \times$ lateral outlet for passing cables incl. protection WP 85-8, without hook tape W 840 and loop tape W 841, optional: central cable outlet

aluminium | W 515 × H 500 × D 515 mm | 13.43 lbs



- When combining several curved frames, deviations may occur at the joints.
- ▼ fabric dimension see technical info

Frames

frame element curved




WP 860-C1.01

for double sided fabric / panel W 515 x H 480 x D 515 mm

1 × frame made of WP 860 for fabric/panel on both sides, for mounting to frame or upright, with 6 × drill hole for quick connector WP 80-1 or WP 80-2, 8 × threaded hole for adjustable foot WP 80-3 and 4 × lateral outlet for passing cables incl. protection WP 85-8, without hook tape W 840 and loop tape W 841, optional: central cable outlet

aluminium | W 515 \times H 480 \times D 515 mm | 13.206 lbs



- $\ensuremath{^{\upshape 7}}$ When combining several curved frames, deviations may occur at the joints.
- fabric dimension see technical info

Basic parts

Frame extrusion


for double sided fabric / panel L 6000 × W 80 × H 40 mm



WP 860.01

for mounting either fabric (with silicone edge M 1313) or panels (with hook tape W 840 and loop tape W 841)

aluminium | L 6000 × W 80 × H 40 mm | 26.274 lbs

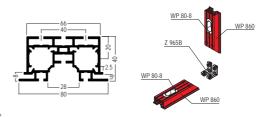

▶ Hook tape W 840 and loop tape W 841 (for mounting panels) have to be ordered separately.

Spacer beam


for frames of WP 860 custom size



WP 860-Z10SO.01

 $1 \times \text{beam}$ of frame extrusion WP 860, as an addition between two frame elements, incl. 4 × built-in tension lock Z 961/8, length = 160 - 1000 mm

aluminium | custom size |

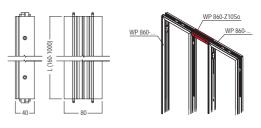


- **⊼** L = 160 1000 mm
- 7 custom size: please advise length when placing the order


Corner upright extrusion | WP 850.01

90° for fabric



for connecting OCTAwall pro fabric frames, fabric can be tensioned over the extrusion up to the corner aluminium | L 6000 \times W 80 \times H 80 mm | 36.332 lbs





Corner upright


90° for 2480 mm frames



WP 850-248.01

1 × corner upright of WP 850 for connecting OCTAwall pro fabric frames height 2480 mm, fabric can be tensioned over the extrusion up to the corner, incl. 2 × end plate WP 85-4

aluminium | L 80 × W 80 × H 2480 mm | 14.991 lbs

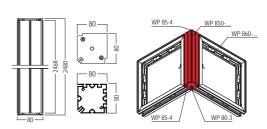

Weitere Abmessungen:

WP 850-48.01 WP 850-50.01 WP 850-100.01 WP 850-150.01

L 80 × B 80 × H 480 mm 3.598 lbs L 80 × B 80 × H 500 mm 3.715 lbs L 80 × B 80 × H 1000 mm 6.834 lbs L 80 × B 80 × H 1500 mm 9.259 lbs

Basic parts

T-extrusion


for 90° connection for double sided fabric / panel




WP 820.01

mounting frames at 90° at any position, for mounting either fabric (with silicone edge M 1313) or panels, installation of 4 × tension lock Z 951/8 possible

aluminium | L 6000 × W 122 × H 28 mm | 25.794 lbs





T-extrusion


for 90° connection for 2480 mm frames




WP 820-248.01

1 × connection extrusion of WP 820 for mounting frames with a height of 2480 mm at 90° at any position, for mounting either fabric (with silicone edge M 1313) or panels, incl. 4 × tension lock Z 951/8

aluminium | L 2400 \times W 122 \times H 28 mm | 11.243 lbs





WP 80-9

WP 80-3

Weitere Abmessungen:

WP 820-48.01 WP 820-50.01 WP 820-100.01

WP 820-150.01


L 400 × B 122 × H 28 mm 2.646 lbs L 420 \times B 122 \times H 28 mm 2.646 lbs L 920 × B 122 × H 28 mm 4.85 lbs 7.055 lbs L 1420 × B 122 × H 28 mm

Corner upright extrusion | WP 840.01

135° for fabric



for connecting OCTAwall pro fabric frames at 135° angle, fabric can be tensioned over the extrusion up to the corner aluminium | L 6060 × W 80 × H 40 mm | 24.868 lbs



Basic parts

Corner upright


135° for 2480 mm frames



WP 840-248.01

1 × corner upright of WP 840 for connecting OCTAwall pro fabric frames with a height of 2480 mm at 135° angle, fabric can be tensioned over the extrusion up to the corner, incl. 2 \times end plate WP 80-9

aluminium | L 40 \times W 80 \times H 2480 mm | 10.362 lbs



Weitere Abmessungen:

WP 840-48.01 WP 840-50.01

WP 840-100.01

WP 840-150.01

L 40 × B 80 × H 480 mm 2.425 lbs L 40 × B 80 × H 500 mm 2.425 lbs L 40 × B 80 × H 1000 mm 5.952 lbs L 40 × B 80 × H 1500 mm 6 614 lbs


Corner upright extrusion | M 260.01


90° corner, round L 6000 × W 120 × H 120 mm



for connecting extrusions with width 16, 40, 80, 120 mm, OCTAwall pro or OCTAwall 40 frames, fabric can be stretched over the extrusion

aluminium | L 6000 × W 120 × H 120 mm | 56.217 lbs






Quick connector


Set for frames WP 860



WP 80-1.90

M8, for connecting frame elements WP 860 steel | L 136 × W 40 × H 40 mm | 0.218 lbs





■ Caution: check existing connections after transport

Quick connector


for uprights WP 850/WP 840




WP 80-2.90

M8, for connecting frame elements to corner upright extrusion WP 850/WP 840 and for mounting of cover extrusion WP 830







Caution: check existing connections after transport

Basic parts

Corner connector


90° lock chamber 21 × 12 mm



Z 965B.00

90°, for extrusions with lock chamber 21 × 12 mm, incl. 2 × hex-star screw E 111 and E 111/20

zinc die cast | L 55 × W 21 × H 12 mm | 0.168 lbs

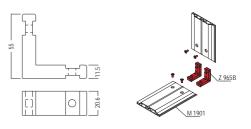

■ steep thread

Corner connector


90° lock chamber 21 × 12 mm



Z 965MB.00

 90° , for extrusions with lock chamber 21 × 12 mm, incl. 2 × hex-star screw E 111-m and 1510-20

zinc die cast | L 55 × W 21 × H 12 mm | 0.168 lbs



Tension lock

8 mm L 70 × W 20 × H 12 mm




Z 961/8.00

■ metric thread

8 mm, for all beam extrusions with cross- or T-lock chamber 21 \times

zinc die cast/steel | L 70 \times W 20 \times H 12 mm | 0.119 lbs





Tension lock


13 mm L 70 × W 21 × H 13 mm



Z 961/13.00

13 mm, for all beam extrusions with lock chamber 21 \times 12 mm as well as in conjunction with adaptor Z 161/A, for beam extrusions with lock chamber 39 × 12 mm

zinc die cast/steel | L 70 \times W 21 \times H 13 mm | 0.115 lbs



Accessories

Adjustable foot


M10 for frame elements




WP 80-3.37

for installation in frame elements with M10 thread, fully retractable in the function channel of OCTAwall pro frames

steel | L 24 × W 24 × H 80 mm | 0.132 lbs





Base plate


long for frame elements



WP 2450.21

for freestanding OCTAwall pro frames, 3 different mounting positions possible, can be used right/left/center, with 1 × WP 2472 angle bracket and 1 × WP 2476 mounting accessories, max. frame height = 2500 mm

steel | L 576 × W 192 × H 122 mm | 12.564 lbs





→ max. frame height = 2500 mm

Base plate


short for frame elements



WP 2460.21

for freestanding OCTAwall pro frames, 6 different mounting positions possible, can be used right/left/center, with 1 \times WP 2472 angle bracket and 1 \times WP 2476 mounting accessories, max. frame height = 2500 mm

steel | L 328 × W 192 × H 122 mm | 7.306 lbs





■ max. frame height = 2500 mm

End plate


for extrusion WP 800 for fabric corner 90°




WP 85-4.21

for corner extrusion WP 850, for fabric corner 90°, to create top and bottom horizontal fabric groove, with thread M10 for installation of adjustable foot

steel | L 80 \times W 80 \times H 6 mm | 0.392 lbs





End plate


for extrusion WP 840 for fabric corner 135°



WP 80-9.21

for mounting to corner upright extrusion WP 840, for fabric corner 135°, to create top and bottom horizontal fabric groove, with thread M10 for installation of adjustable foot

steel | L 50 × W 83 × H 6 mm | 1.887 lbs

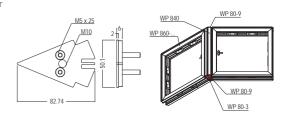

Accessories

End plate


for 80 mm extrusions for M 260




M 261.21

for Quarter-round extrusion M 260 in connection with 80 mm extrusions, to create top and bottom horizontal fabric groove, with drilling 11 mm dia. for adjustable foot

steel | L 120 × W 120 × H 6 mm | 0.739 lbs






End plate


for 120 mm extrusions for M 260



M 271.21

for Quarter-round extrusion M 260 in connection with 120 mm extrusions, to create top and bottom horizontal fabric groove steel \mid L 120 × W 120 × H 6 mm \mid 0.992 lbs





Monitor mount


for 32" - 63" for frames W 950 mm



E 196.90

for attachment between two uprights with system groove 4.3 mm or frames W 950 mm, for one sided monitor solutions of LCD screens 32" - 63" VESA 50/50 to 600/400, incl. 1 × beam extrusion M 1340, 870 mm long, with 2 × tension lock Z 961/13, 2 × tension lock retractable Z 951/13, 2 × mounting bracket with universal slots and mounting hardware

aluminium/steel | L 870 × W 53 × H 510 mm | 7.586 lbs

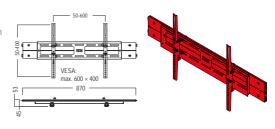

■ Monitor can be mounted straight or at an angle of 10° max

Cover extrusion


for extrusionWP 860 L 6000 × W 80 × H 9 mm



WP 830.01

to cover frame extrusion WP 860, fastening with WP 80-2 hammer-head screw $\,$

aluminium | L 6000 \times W 80 \times H 9 mm | 7.892 lbs





■ only in connection with hammerhead screw WP 80-2

Accessories

Cover extrusion


for extrusion WP 860 L 2480 × W 80 × H 9 mm



WP 830-248.01

to cover frame extrusion WP 860 of frames with 2480 mm height, fastening with WP 80-2 hammer-head screw $\,$

aluminium | L 2480 × W 80 × H 9 mm | 3.23 lbs





Weitere Abmessungen:

WP 830-48.01 WP 830-50.01

WP 830-100.01

WP 830-150.01

L 480 × B 80 × H 9 mm 0.626 lbs L 500 × B 80 × H 9 mm 0.657 lbs L 1000 × B 80 × H 9 mm 1.303 lbs L 1500 × B 80 × H 9 mm 1.953 lbs

Attention: Hammerhead screw WP 80-2 is required for mounting

Doors

Sliding door


opening W 950 × H 2500 mm W 1975 × H 2500 × D 80 mm



W 420.01

 $1\times$ door element made of W 906 for fabric and panel on both sides, can be attached toolfree to the system groove of the OCTAwall 40 frame with hammer head screws, for installation in opening with clear dimensions W 950 x H 2500 mm, sliding door dimensions W 990 x H 2480 x D 40 mm

aluminium | W 1975 × H 2500 × D 80 mm | 17.855 lbs



■ fabric dimension = outer frame dimension

Door set

for 80 mm W 950 × H 2500 × D 80 mm




W 805-SET.01 | .03

 $1\times$ door element made of M 2120/W 906, for fabric/panel on both sides, DIN left/right, inward/outward opening, door leaf flush with door leaf frame on the outside or inside, incl. door leaf frame and dead lock cylinder W 514, without hook tape W 840, outer frame dimensions door leaf frame: 908 \times 2442 mm

aluminium/steel | W 950 × H 2500 × D 80 mm | 40.172 lbs





- → Only use silicone edge 12 × 3 mm for door leaf frame
- ▼ fabric dimension = outer frame dimension

Window element

for W 805 W 828 × H 2362 × D 40 mm




W 809.01

1 × window element W 906 for fabric/panel on both sides, for installation in door element W 805, window cut-out: W 200 × H 800 mm

aluminium | W 828 × H 2362 × D 40 mm | 15.587 lbs





■ Only use silicone edge 12 × 3 mm for door leaf frame

Door set

for 40/80/120 mm W 950 × H 2500 × D 40 mm




W 575-SET.01

 $1\times$ door element made of W 906, for fabric/panel on both sides, DIN left/right, inward/outward opening, incl. doorleafframe, dooruprightframe, threshold plate and door frame (top), hook tape W 840, extrusion connector E 438 and dead lock cylinder W 514, outer frame dimensions: door leaf frame: 855 \times 2021 mm, door frame (top): 870 \times 450 mm

aluminium/steel | W 950 \times H 2500 \times D 40 mm | 40.172 lbs





- Only use silicone edge 12 × 3 mm for doorleafframe
- fabric dimension = outer frame dimension

Door


for 40/80/120 mm 40 mm, custom size




W 575SO.01

1 × door element made of W 906, for fabric/panel on both sides, DIN left/right, inward/outward opening, incl. doorleafframe, dooruprightframe, threshold plate and door frame (top), hook tape W 840, extrusion connector E 438, without dead lock cylinder W 514, 40 mm, custom size: please specify door element width and door element height when ordering

aluminium/steel | 40 mm, custom size |



◄ fabric dimension = outer frame dimension

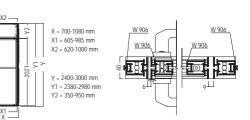

Doors

Door Mounting Set


for door W 575 integration into 80 mm



W 575-080.01

for flush or 20 mm projecting connection of the doorelement W 575 to Maxima 80 or OCTAwall pro, consisting of: $6\times$ mounting bracket W 575-080A, $6\times$ retractable sliding block C 60 590, 12 × countersunk screw (M4) VA 1058/20

aluminium | L 40 × W 32 × H 60 mm | 0.322 lbs

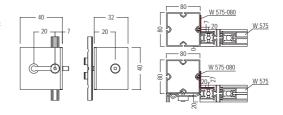

Door cylinder


for W 425 / W 575 / W 805 L 61 × W 42 × H 28 mm



W 514.38

1 × dead lock cylinder, for mounting into door W 425 / W 575 / W 805, incl. 3 × key W 514/S

steel | L 61 × W 42 × H 28 mm | 0.489 lbs



LED/Fabric/Panel

LED panel fastener


Infiled LED inspire 2.6 DB pro L 51 × W 42 × H 18 mm




WP 80-5.37

for mounting Infiled LED inspire 2.6 DB pro panel to frame extrusion WP 860 $\,$

steel | L 51 × W 42 × H 18 mm | 0.201 lbs





LED panel fastener


Unilumin LED UPad4 L 65 × W 28 × H 12 mm



WP 80-6.37

for mounting Unilumin UPad4 LED panel to frame extrusion WP $\,860\,$

steel | L 65 × W 28 × H 12 mm | 0.205 lbs






LED panel fastener


Absen DW LED L 66 × W 28 × H 12 mm



WP 80-7.37

for mounting Absen DW LED panel to frame extrusion WP 860 steel | L 66 \times W 28 \times H 12 mm | 0.205 lbs





LED panel fastener


Infiled inspire/Leyard LN L 107.5 × B 107.5 × H 21 mm




WP 80-56.37

for mounting Leyard LN1.9 panels with M8 flat screws N 000009 in frame extrusion WP 860, or for mounting Infiled LED inspire 2.6 DB panels with M10 flat screws WP 80–51 and washers N 000010 in frame extrusion WP 860

steel | L 107.5 × B 107.5 × H 21 mm | 1.757 lbs





Silicone edge


100 meter roll for fabric



M 1313.50

for mounting fabric to all tension fabric extrusions, 100 m roll silicone | W 14 \times H 3 mm | 11.332 lbs





LED/Fabric/Panel

Hook tape

50 meter roll for mounting of panels



W 840.30

for mounting of panels, polyamide, white, self-adhesive, 50 m roll polyamide | W 20 \times H 2 mm | 1.415 lbs





Loop tape

25 meter roll for mounting of panels



W 841.30

for mounting of panels, white, self-adhesive, 25 m roll polyamide | W 20 \times H 2 mm | 0.862 lbs





Panel retainer


for hanging panels for WP 892




WP 891.01

for hanging panels, for hook WP 892, to be installed in the system groove, incl. 1 \times tension lock Z 961-8

aluminium | L 70 \times W 40 \times H 40 mm | 0.328 lbs





Slotted insert rail set


for hanging panels L 2399 × W 30 × H 30 mm




WP 890-2480.01

 $1 \times$ extrusion made of WP 890HZ with system grid 500 mm, for hanging panels on OCTAwall pro frame with 2480 mm height, incl. $6 \times$ fixing set M6 WP 895

aluminium/steel | L 2399 × W 30 × H 30 mm | 1.94 lbs





Weitere Abmessungen:

WP 890-480.01 WP 890-500.01 WP 890-1000.01 WP 890-1500.01

L 399 × B 30 × H 30 mm 0.141 lbs L 419 × B 30 × H 30 mm 0.212 lbs L 919 × B 30 × H 30 mm 0.763 lbs L 1419 × B 30 × H 30 mm 0.282 lbs

LED/Fabric/Panel

Fixing set


for hanging panels for WP 890-...




WP 895.37

for mounting perforated rails WP 890-... to system groove 4.3 mm, incl. 1 \times hammerhead screw M6 M 1348-Ha

steel/plastic | L 21 \times W 22 \times H 22 mm | 0.071 lbs





Mounting hook


PU 20 pcs for hanging panels




WP 892.00

with system distance 32 mm, for screwing onto a panel with Euro screw WP 893 (pre-drilled \emptyset 5 mm) or wood screw (screws not included), 2 screws required per hook, PU 20 pcs

aluminium | L $48 \times W 12 \times H 8 \text{ mm}$ | 0.22 lbs





■ 2 screws required per hook.


Screw


PU 100 pcs for WP 892



WP 893.38

for Ø 5 mm hole, for screwing on WP 892 hook, PU 100 pcs. steel, nickel plated | L 10.5 \times W 7.8 \times H 7.8 mm | 0.441 lbs





Slotted insert rail set

for hanging panels top/bottom




WP 890-UO.01

 $1 \times$ extrusion made of WP 890HZ with system grid, for hanging panels on OCTAwall pro frame as top/bottom system punch, incl. $2 \times$ fixing set M6 WP 895

aluminium/steel | L 237 × W 30 × H 30 mm | 0.141 lbs





Electrical parts

Pendant light


1 illuminated side L 1000 × W 80 × H 80 mm



OL 3100.01 | .03

Set consisting of: 1 × upright L 1022-1000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 x 3.500 mm OL 466, 2 × wire rope retainer set L 222

aluminium | L 1000 × W 80 × H 80 mm | 9.052 lbs

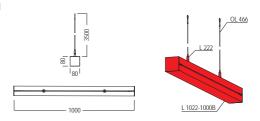

Pendant light


1 illuminated side L 2000 × W 80 × H 80 mm



OL 3200.01 | .03

Set consisting of: 1 × upright L 1022-2000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 × 3.500 mm OL 466, 2 × wire rope retainer set L 222

aluminium | L 2000 × W 80 × H 80 mm | 15.284 lbs

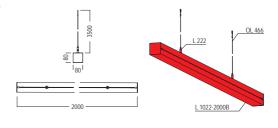

Pendant light


1 illuminated side L 3000 × W 80 × H 80 mm



OL 3300.01 | .03

Set consisting of: 1 × upright L 1022-3000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 x 3.500 mm OL 466, 2 × wire rope retainer set L 222

aluminium | L 3000 × W 80 × H 80 mm | 21.786 lbs

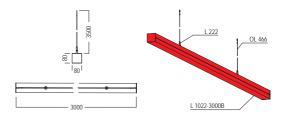

Wallwasher


LED / 28W / 230V L 812 × W 166 × H 263 mm



M 1497.31 I .33

for uniform illumination of 1000 mm width and 2500 mm height (5700 Kelvin > Cri 90, 3600 lm, 28 W, 125 lm/W), for 230 V power source, for system groove 4.3 mm, space-saving and securely packed, with 16 high-power LEDs, PSU incl. cable (500 mm to lamp and 2500 mm from power supply)

aluminium | L 812 × W 166 × H 263 mm | 4.5 lbs



Hanging lamp


LED / 56W / 230V L 818 × W 150 × H 35 mm



M 1497-H.33

for a homogenous illumination in 5700K > Cri 90, with 32 highpower LEDs, 7200 lm, 56 W, 128 lm/W, for 230 V, incl. 3.5 m wire rope with 2 × Reutlinger wire rope holders to adjust height, 2 × plastic end caps black, 1 × power supply unit incl. DC distributor, 3 m extension cable with DC connector


aluminium, matt powder-coated | L 818 \times W 150 \times H 35 mm | 5.489 lbs



Electrical parts

Power supply


for wallwasher M 1497 L 1175 × W 72 × H 35 mm



M 1497-11.90

for wallwasher M 1497, converter with 24V, 6.67A, 160W, rated voltage AC 100-240V, 50/60Hz, cable 1000 mm long

plastic | L 1175 \times W 72 \times H 35 mm | 1.407 lbs



■ Attention: suitable power cord M 1497-12 is required

Cable

for wallwasher M 1497 2500 mm long



M 1497-12.90

for wallwasher M 1497, power cord CEE 7/7 - C13 plastic, black | 2500 mm long | 0.571 lbs



Extension cable


for wallwasher M 1497 3000 mm long



M 1497-1.33

cable for connecting M 1497 wallwashers, with angled barrel connector at both ends

plastic, black | 3000 mm long | 0.282 lbs




PWM Dimmer

for wallwasher M 1497 L 150 × W 40 × H 20 mm



M 1497-4.90

 $1 \times$ control unit and remote control for dimming of max. 5 wallwasher M 1497, DC 12-24 V, 2.4 GHz, PWM frequency 1.95 KHz plastic | L 150 × W 40 × H 20 mm | 0.227 lbs



Cable


Y-Splitter for wallwasher M 1497



M 1497-3.90

Y-cable for connecting up to 5 × wallwasher M 1497, with barrel connector at all ends

plastic, black | 300 mm long | 0.09 lbs



Electrical parts

Long-arm floodlight


25 W L 490 × W 232 × H 40 mm



M 1494.31 | .33

for swivel mounting in system groove, incl. adapter plate and connection cable 3 m, 25 W, 2500 lm, 4000 K, voltage input: 100–240 VAC, voltage output: 27–35 VDC, color rendering index: 80+ CRI, beam angle: 120°

aluminium | L 490 × W 232 × H 40 mm | 1.675 lbs





■ without connecting cable M 1494-xxxx


Connecting cable

for M 1494 1000 mm long



M 1494-1000.33

230V connecting cable for IEC C13 connections, one side plug, one side socket, can also be used as an extension rubber | 1000 mm long | 0.254 lbs






Connecting cable

for M 1494 2000 mm long



M 1494-2000.33

230V connecting cable for IEC C13 connections, one side plug, one side socket, can also be used as an extension rubber | 2000 mm long | 0.507 lbs






Connecting cable

for M 1494 3000 mm long



M 1494-3000.33

230V connecting cable for IEC C13 connections, one side plug, one side socket, can also be used as an extension rubber | 3000 mm long | 0.772 lbs





Cable protection


for cable outlet for extrusion WP 860




WP 85-8.35

for extrusion WP 860, for cables with plug, to protect cables against damage during installation $\,$

plastic | L 90 \times W 36 \times H 34 mm | 0.02 lbs





₹ octawall pro

Packaging/Transport

Pallet


for frames W 950 mm L 2550 × W 1010 × H 125 mm



W 2020-P.90

Packing, storing and transport, suitable for all OCTAwall frames width 950 $\,\mathrm{mm}$

wood | L 2550 × W 1010 × H 125 mm | 68.343 lbs

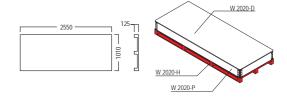

Stacking frame


for frames W 950 mm L 2550 × W 1050 × H 200 mm



W 2020-H.90

Packing, storing and transport, suitable for all OCTAwall frames width 950 $\,\mathrm{mm}$

wood/steel | L 2550 × W 1050 × H 200 mm | 30.423 lbs

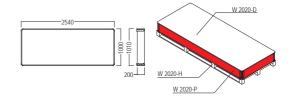

Stacking frame cover


for frames W 950 mm L 2550 × W 1050 × H 15 mm



W 2020-D.90

Packing, storing and transport, suitable for all OCTAwall frames width 950 $\,\mathrm{mm}$

wood | L 2550 × W 1050 × H 15 mm | 31.967 lbs

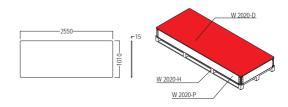

₹ octawall pro

Sets

Set


10 frames L 2550 × W 1010 × H 1140 mm



WP-SET 1.01

Set consisting of: 10 × frame WP 860-11 , 2 × corner upright WP 850-248, 4 × cover extrusion! WP 830-248, 45 × quick connector kit frame WP 80-1, 25 × quick connector kit upright WP 80-2, 20 × adjustable foot WP 80-3, 1 × pallet W 2020-P, 1 × cover W 2020-D and 5 × stacking frame W 2020-H

aluminium | L 2550 × W 1010 × H 1140 mm | 612.901 lbs



■ fabric size = outer frame dimension

Set


11 frames



WP-SET 2.01

Set consisting of: 11 × frame WP 860-11 , 4 × corner upright WP 850-248, 9 × cover extrusion! WP 830-248, 40 × quick connector kit frame WP 80-1, 45 × quick connector kit upright WP 80-2, 22 × adjustable foot WP 80-3, 1 × door element W 805-SET, 1 × pallet W 2020-P, 1 × cover W 2020-D and 6 × stacking frame W 2020-H

aluminium | L 2550 × W 1010 × H 1340 mm | 761.8 lbs



¹ **¬** fabric size = outer frame dimension

→ octawall pro

◄ Illuminated frame systems

Overview



octalumina



octalumina



octalumina

ottom: octanorm - Euroshop - Krasser

尽 Illuminated frame systems

Overview




octalumina



octalumina plus


octalumina 40/80/120/plus/kubus

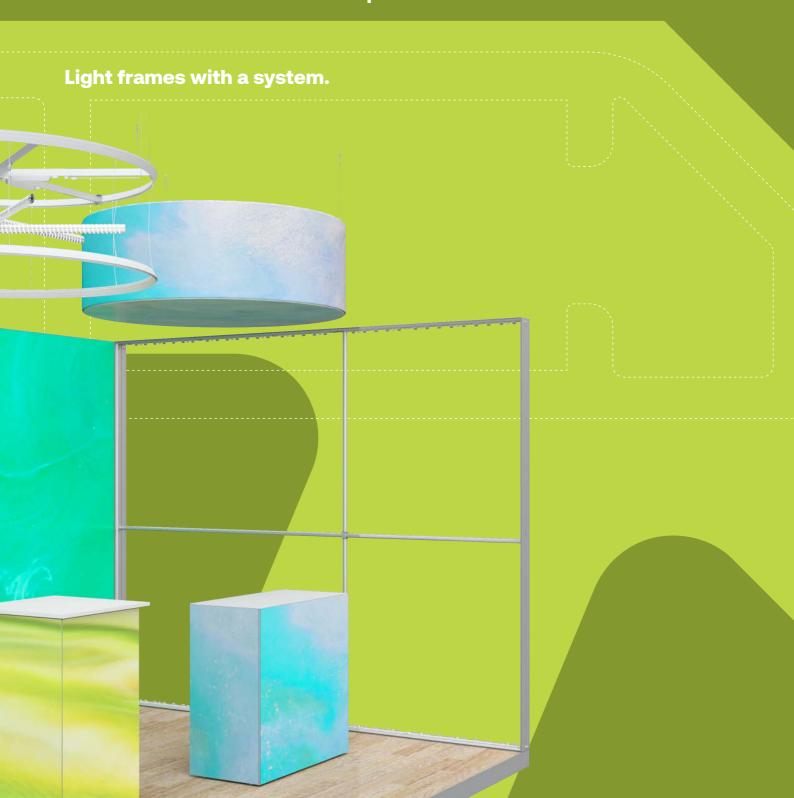

⊅ octalumina 40	333
∍ octalumina 80	351
∍ octalumina 120	371
→ octalumina plus	405
z octalumina kubus	





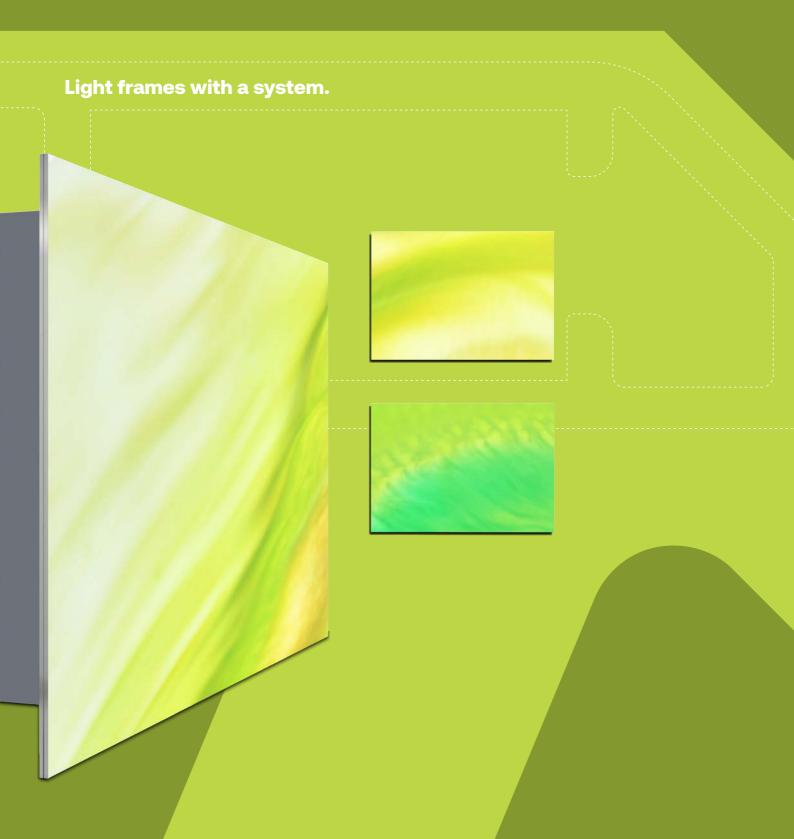

Index

TECHNICAL FEATURES	334
▼ OVERVIEW	336
7 COMPONENTS	
7 Basic parts	338
7 Accessories	340
→ Electrical parts → Linear Parts → Li	341
¬ Products	349



Technical features



40 mm with system groove



40 mm without system groove



integrated PSU



plug & play



modern power LEDs



numerous frame colors



silicone edge graphics

With or without system groove. Whatever you need.

octalumina with 40 mm comes in the standard DIN A0 and DIN A1 without system groove and in 950 \times 2480 mm with system groove. Individual formats are available on request.

Compelling quality. Amazing luminosity.

Our high-quality components are pre-assembled with power LEDs, ensuring a brilliant illumination with radiant colors. Other advantages: their longevity and low energy requirements.

Handling: fast and simple.

The **octalumina 40** frames are supplied completely pre-assembled; no further assembly required. Your light frame is ready for immediate use.

Main application: everything.

Fairs, events, POS, or exhibitions: **octalumina 40** can be used for all kinds of decorative or presentation purposes – even in combination with **octawall** or **maxima 40**. The only thing you will have to decide: freestanding, suspended, or mounted?

The invisible PSU.

The slimline power supply unit. Your advantage: an undisturbed, appealing look, because the PSU is integrated in the frame and invisible from the outside. This also makes a costly hidden installation of the PSU into the wall a problem of the past. Compact and simple to install.

Overview



OL 359-1

OL 142

DL 142


OL 151

OL 144

OL 146

Overview







Basic parts

Tension fabric extr.


without system groove for single-sided illumination




M 1930.01

for light frames with single sided illumination, without system groove, graphics with silicone edge M 1313 $\,$

aluminium | L 6000 \times W 40 \times H 11 mm | 7.518 lbs





Tension fabric extr.


with system groove for single-sided illumination




M 1970.01

for light frames with single-sided illumination, with system groove, graphics with silicone edge M 1313 $\,$

aluminium | L 6000 × W 40 × H 29 mm | 9.57 lbs





Square extrusion


4 system grooves L 5000 × W 40 × H 40 mm



M 1000.01

for connection on 4 sides, tension lock Z 961/8 can be mounted in 2 positions, with 4 system grooves, groove depth 7 mm aluminium | L 5000 \times W 40 \times H 40 mm | 12.747 lbs






Corner upright


90° with adjustable foot W 913



W 990.01

1 × corner extrusion 90° of M 1000, incl. 1 × adjustable foot W 913 aluminium | L 40 × W 40 × H 2500 mm | 7.055 lbs





Fixing set


M5 for OCTAlumina 40 frames




OL 495.90

M5, to connect 2 \times OCTAlumina 40 light frame (OL 415) or frame with extrusion

steel | L 40 \times W 5 \times H 14 mm | 0.026 lbs





Basic parts

Corner connector


90° for M 1930 / M 1970 / M 1601




M 1927.00

90°, for connection of extrusion M 1930, M 1970 and M 1601, and for stabilization of miter with profile M 1920, incl. 4 \times set screw S 4330/20 (M5)

steel | L 50 × W 50 × H 10 mm | 0.031 lbs





Accessories


Adjustable foot


M10 for OCTAlumina 40 frames



W 913/1.37

M10, for mounting in OCTAlumina 40 light frames (OL 415) steel | L 32 \times W 32 \times H 34 mm | 0.018 lbs





 $\color{red} {\color{red} {\bf 7}}$ M 10 thread has to be cut into the frame extrusion

Screw eye


max. 35 kg Opening 20 mm dia.



M 1233.37

for system groove 4.3 mm, opening 20 mm dia., consists of 1 \times hammer head screw (M8) M 1470/Ha and 1 \times eye nut (M8) M 1401/21

steel | L 36 \times W 20 \times H 36 mm | 0.134 lbs



nax. load capacity 35 kg

Angle support


for panel mounting for extrusion M 1930



OL 492.37

to fix the rear panel (aluminium compound) to the M 1930 frame profile $\,$

steel | L 30 × W 18 × H 10 mm | 0.046 lbs

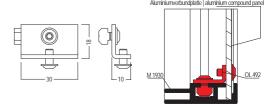

→ recommended for length from 1000 mm

Electrical parts

LED module


3 LEDs 357 lm / 3.7 W / 24 V



OL 303.90

3 LEDs per unit 3.7 W / 24 V, 6500 K, 357 lm, incl. wiring pluggable (plug/bush) back side self-adhesive

aluminium/plastic | L 240 \times W 20 \times H 9 mm | 0.071 lbs



LED module


6 LEDs 708 lm / 7,5 W / 24 V



OL 306.90

6 LEDs per unit 7.5 W / 24 V, 6500 K, 708 lm, incl. wiring pluggable (plug/bush) back side self-adhesive

aluminium/plastic | L 480 × W 20 × H 9 mm | 0.22 lbs




LED module

12 LEDs 1375 lm / 15 W / 24 V



12 LEDs per unit 15 W / 24 V, 6500 K, 1375 lm, incl. wiring pluggable (plug/bush) back side self-adhesive

aluminium/plastic | L 960 \times W 20 \times H 9 mm | 0.238 lbs



Dimmer


Mini 12-24 V



OL 181.90

controller and remote Voltage: 12V-24V 6A Max, 144 W @ 24 V, 72 W @ 12V, 1 channel input open, output with LED connector

plastic | L 67 × W 31 × H 10 mm | 0.317 lbs



→ only in combination with OL 303 - 312, OL 685, OL 682

Power supply


36 W for LEDs



OL 191.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 0.8 A, output: 24 V DC, 1.5 A, 36 W, cable length 1000 mm

plastic, black | L 79 \times W 54 \times H 33 mm | 0.461 lbs



OL 149 necessary, max. load only up to 29 W recommended for long life soan of the LED power supply unit

Electrical parts

Power supply


60 W for LEDs



OL 108.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 0.64 A, Output: 24 V DC, 2,5 A, 60 W, plug connection at both ends, includes 2 \times OL 252 mounting set

aluminium/plastic | L 171 × W 62 × H 37 mm | 1.592 lbs

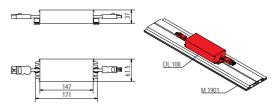

max. load only up to 48 W recommended for long life soan of the LED power supply unit

Power supply


100 W



OL 100.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 1.1 A, output: 24 V DC, 4.16 A, 100 W, plug connection at both ends, includes 2 \times OL 252 mounting set

aluminium/plastic | L 200 × W 65 × H 39 mm | 2.03 lbs



max. load only up to 80 W recommended for long life soan of the LED power supply unit

Power supply


150 W for LEDs



OL 102.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 1.7 A, output: 24 V DV, 6.3 A, 150 W, plug connection at both ends, includes 2 \times OL 252 mounting set

aluminium/plastic | L 228 × W 68 × H 39 mm | 2.588 lbs



max. load only up to 120 W recommended for long life span of the LED power supply unit

Power supply


240 W



OL 98.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 4.0 A, output: 24 V DV, 10,0 A, 240 W, plug connection at both ends, includes 2 \times OL 252 mounting set

aluminium/plastic | L 244 × W 68 × H 39 mm | 2.687 lbs

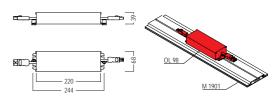

max. load only up to 192 W recommended for long life soan of the LED power supply unit

Power supply


320 W for LEDs



OL 320.90

input: 100-240 V AC, 50/60 Hz, 3.5 A, output: 24 V DC, 13,34 A, 320 W, plug connection at both ends, includes 2 \times OL 252 mounting set

aluminium/plastic | L 252 × W 90 × H 44 mm | 3.924 lbs



max. load only up to 256 W recommended for long life soan of the LED power supply unit

Electrical parts

Power supply


100 W (Slim Line) installation in frame



OL 104/1.90

for installation in OCTAlumina 40/80/120 frames, Input: 200-240 V AC, 50/60 Hz, 0.95 A, Output: 24 V DC, 4,17 A, 100 W

plastic | L 298 × W 30 × H 16.5 mm | 0.487 lbs




Power supply

150 W (Slim Line) installation in frame



OL 106/1.90

for installation in OCTAlumina 40/80/120 frames, input: 200-240 V AC, 50/60 Hz, 1.0 A, output: 24 V DC, 6.25 A, 150 W plastic \mid L 320 × W 30 × H 22 mm \mid 0.536 lbs



■ Only suitable for 230 volts! Not for USA and Canada!


Power supply

200 W (Slim Line) installation in frame



OL 206/1.90

for installation in OCTAlumina 40/80/120 frames, input: 200-240 V AC, 50/60 Hz, 1.6 A, output: 24 V DC, 8.33 A, 200 W plastic | L 360 \times W 30 \times H 23 mm | 0.95 lbs



■ Only suitable for 230 volts! Not for USA and Canada!

Power cable


for LED PSU 2000 mm long



OL 122.90

Mains connection cable, socket - SchuKo plug, 3 poles, rated voltage 250 V, rated current 16 A, cable type H05VV-F, conductor nominal cross-section 1.5 mm²

plastic, white | 2000 mm long | 0.611 lbs



 \blacksquare for PSU OL 98 / OL 100 / OL 102 / OL 108

Power cable


for LED PSU (Slim Line) 2000 mm long



OL 130.30

Euro plug, open end on one side, 2 poles, rated current 2.5 A, cable type H03VVH2-F, nominal conductor cross-section 0.75 $\,\mathrm{mm}^2$

plastic | 2000 mm long | 0.176 lbs



7 for PSU OL 104/1 and OL 106/1

Electrical parts

Power cable


for LED PSU OL 104/1 2000 mm long



OL 491.90

for connection of OL 138, with Europlug and gesis® MICRO female connector

plastic | 2000 mm long | 0.176 lbs

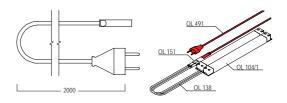

7 for LED PSU OL 104/1

Extension cable


230 V/2,5 A, female connector -500 mm long



OL 132.90

 pagis° MICRO adaptor cable, female connector GST08i2 - plug GST15i2, 230 V / 2.5 A, wire H03V2V2-F

plastic | 500 mm long | 0.022 lbs



Extension cable


230 V / 2,5 A, Plug - wire 500 mm long



OL 138.90

gesis® MICRO cable connection, one side fitted with plug, GST08i2, 230 V / 2.5 A, wire H03V2V2-F

plastic | 500 mm long | 0.022 lbs

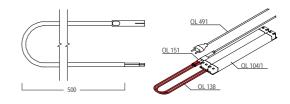

Connecting cable

230 V/2,5 A, female connector


1000 mm long



OL 134,90

 $\rm Meg is^{\circ}$ MICRO cable connection, female connector plug, GST08i2, 230 V / 2.5 A, wire H03V2V2-F

plastic | 1000 mm long | 0.13 lbs

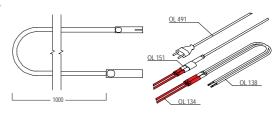

Connecting cable


external, 24V 1000 mm long



OL 139.30

for connecting a LED module to the power supply unit, if the distance between LED power supply and LED module is too big, incl. plug OL 148 on one side, $24\ V/10\ A$

plastic | 1000 mm long | 0.194 lbs



after cutting the cable to size the female plug OL 149 has to be mounted on the other side

Electrical parts

Connecting cable

external, 24V 3000 mm long



OL 140.30

for connecting a LED module to the power supply unit, if the distance between LED power supply and LED module is too big, incl. plug OL 148 on one side, 24 V/10 A $\,$

plastic | 3000 mm long | 0.553 lbs



after cutting the cable to size the female plug OL 149 has to be mounted on the other side


Connecting cable

2-wire 1000 mm long



OL 359-1.90

2 wire cable (brown, blue), PVC hose cable white plastic, white | 1000 mm long | 0.126 lbs



Distributor block


250 V/16 A for 2 × PSU



OL 142.90

for connecting two power supply units OL 100 and/or OL 102 to the 2 m long power cable OL 122, 1 input / 2 output, 3 poles, 250 V/16 A

plastic, white | L 32 × W 22 × H 35 mm | 0.031 lbs



Distributor block

250 V/16 A



DL 142.90

for connecting 3 power supply units to 2 m power cable OL 122, 1 input / 3 output, 3 poles, 250 V/16 A $\,$

plastic, white | L 36 \times W 22 \times H 33 mm | 0.035 lbs





Distributor block


250 V/2,5 A for 2 × OL 138



OL 151.90

for assembly of 2 \times OL 138, 1 input / 2 output, GST08i2, 2-pole, 250 V / 2.5 A

plastic, white | L 52 \times W 22 \times H 11 mm | 0.013 lbs

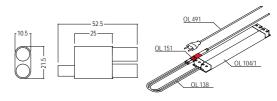

Electrical parts

Female connector


250V / 16A for DIY assembly



OL 144.30

for DIY assembly, 3 pole, with strain relief, use with power cable OL 122, 250V / 16A $\,$

plastic, white | L 53 \times W 23 \times H 14 mm | 0.018 lbs



Male plug


250V / 16A for DIY assembly



OL 146.30

for DIY assembly of OL 98 / OL 100 / OL 102 / OL 104 / OL 106 / OL 108 PSUs, 3-pole, with strain relief, 250V / 16A

plastic, white | L 53 × W 23 × H 14 mm | 0.055 lbs



Male plug


24V / 16A for DIY assembly



OL 148.90

for DIY assembly of 24 V OL 135-1 / OL 137-1 connection cable, 2-pole, with strain relief, 24V / 16A $\,$

plastic | L 53 \times W 18 \times H 14 mm | 0.018 lbs



Female connector


24V / 16A for DIY assembly



OL 149.90

for DIY assembly of OL 98 / OL 100 / OL 102 / OL 104 / OL 106 / OL 108 power supply units, or 24 V OL 139 / OL 140 connection cable, 2-pole, with strain relief, 24V / 16A

plastic | L 53 × W 18 × H 14 mm | 0.018 lbs



Female connector


250 V / 16 A connection OL 130 to OL 132



OL 145.90

for connection of OL 130 to OL 132, gesis® GST15I2 installation coupler female with strain-relief, 2-pole, 250 V/16 A, IP20, Code 1, pebble grey, mains without PE, colour of housing: white, integrated secure locking

plastic | L 53 × W 18 × H 14 mm | 0.018 lbs



Electrical parts


Connecting clamp

Wago, double connection module to PSU




OL 314.90

Wago, for connection of LED modules to PSU, double plastic \mid L 13 × W 18 × H 8 mm \mid 0.004 lbs




Connecting clamp

Wago, quintuple connection module to PSU



OL 315.90

Wago, for connection of LED modules to PSU, quintuple plastic \mid L 30 × W 18 × H 8 mm \mid 0.009 lbs




Cable protection

opening 10 mm dia. L 14 × W 14 × H 9 mm



OL 117.33

for cable outlet opening Ø 10 mm in rear panel OCTAlumina 40 rubber | L 14 \times W 14 \times H 9 mm |



round drilling necessary

Adhesive base


100 pcs for cable ties OL 255



OL 254.90

for wire management with wire ties OL 255 (not included), max. width wire ties 4 mm, packaging unit 100 pcs.

plastic, white | L 19 \times W 19 \times H 5 mm | 0.157 lbs



Cable tie

100 pcs L 155 × W 2.5 mm



OL 255.90

for wire management with fixing set for cable ties, packaging unit: 100 $\ensuremath{\mathsf{pcs}}$

plastic, white | L 155 \times W 2.5 mm | 0.112 lbs



Electrical parts

Tape


roll with 50 m double-sided




OL 419.90

to mount back panel to M 1970 extrusion, double-sided self adhesive, roll with 50 \mbox{m}

plastic | L 50000 × W 20 × H 1 mm | 0.441 lbs





Products

Light frame


wall mounting W 1189 × H 840 × T 40 mm



OL 400.01

 $1\times$ frame element single-sided illuminated of M 1930, without system groove, lighting method: back-lit 8750 lumen, 112 W, 24 V, incl. $1\times$ power supply unit (external), light color: 6000 Kelvin (daylight white), dimmer also available, back: aluminium sandwich panel 3 mm

aluminium | W 1189 \times H 840 \times T 40 mm | 25.858 lbs



without fabric/graphics (fabric dimensions = outer frame dimensions)

Light frame


wall mounting W 841 × H 594 × D 40 mm



OL 401.01

 $1\times$ frame element single-sided illuminated of M 1930, without system groove, lighting method: back-lit, 4375 lumen, 56 W, 24 V, incl. $1\times$ power supply unit (external), light color: 6000 Kelvin (daylight white), dimmer also available, back: aluminium sandwich panel, 3 mm

aluminium | W 841 \times H 594 \times D 40 mm | 14.096 lbs



without fabric/graphics (fabric dimensions = outer frame dimensions)

Light frame


with adjustable feet W 950 × H 2480 × D 40 mm



OL 415.01

1 × frame element single-sided illuminated of M 1970, with system groove, aluminium composite panel with LED modules mounted, incl. 2 m cable with plug, with 2 × adjustable foot

aluminium | W 950 \times H 2480 \times D 40 mm | 136.685 lbs



without fabric/graphics (fabric dimensions = outer frame dimensions)

Circular lamp


round, ceiling mounting L 800 × W 800 × H 40 mm





OL 480.90

1 × round ceiling lamp of M 1930 black with suspension, minimalistic extrusion edges for maximum usable area, aluminium composite panel with LEDs for backlighting, LED module and PSU preinstalled, luminous color: 6500, electric power: 99,5W, luminous intensity: 900lm, incl. 1 × cable with Schuko plug and 1 × white fabric without graphic

aluminium | L 800 × W 800 × H 40 mm | 21.605 lbs





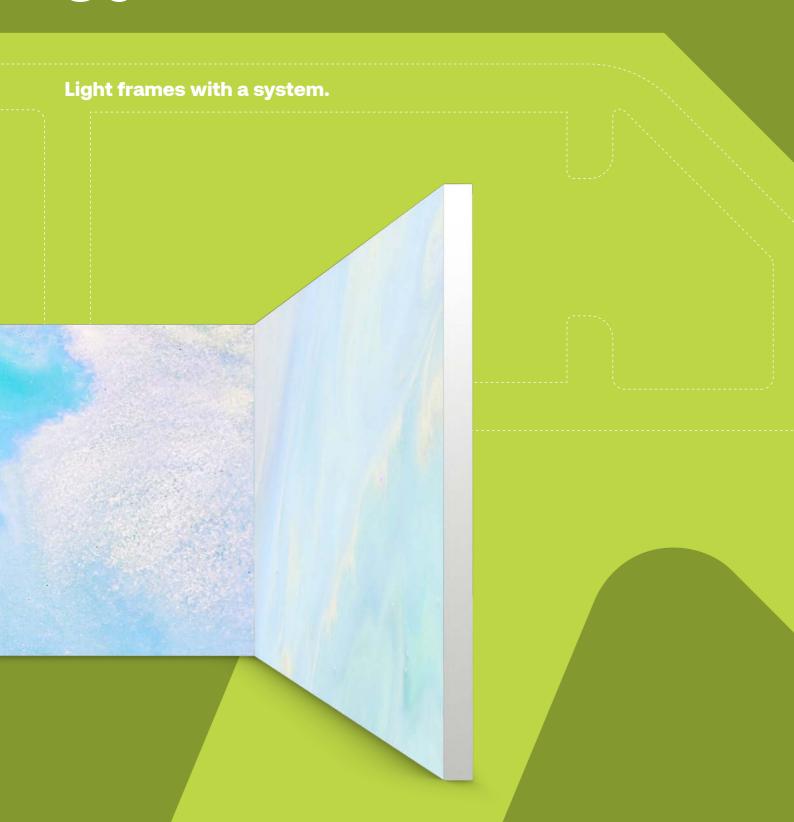

Index

7 TECHNICAL FEATURES	352
₹ OVERVIEW	354
7 Basic parts	356
Accessories Acces	359
	361
¬ Packaging/Transport	367
	368



Technical features



modern power LEDs



numerous frame colors



integrated electricity components



80 mm singlesided



individual suspension



plug & play



silicone edge graphics

Shining example. Also in regards to quality.

Our high-quality components made from anodized aluminium are dimensionally stable, durable, and aesthetically pleasing. Lateral feed-in with power LEDs ensures a homogeneous illumination and a long operating time at low power consumption.

Simple handling? Standard feature.

Our assembly concept in two words: plug & play. Pre-assembled extrusions and simple connectors help save time and money. Our reusable system packaging ensures safe transportation and storage.

Maximum flexibility. Minimum effort.

Freestanding with base plates, wall mounted or suspended from the ceiling, **octalumina 80** adapts to the needs.

Overview

Basic parts M 1935 M 1020 M 1053 M 260 W 835 OL 238 M 1965B Z 966 M 1967 M 1977 Accessories Z 4400 Z 977 Z 961/13 W 2850 OL 200 OL 215 M 261 M 1491 OL 220 OL 234 **Electrical parts** OL 323 OL 325 OL 327 OL 329 OL 102 OL 182 OL 183 OL 191 **OL 108** OL 100

OL 98

OL 104/1


OL 106/1

OL 206/1

OL 122

OL 139

Overview

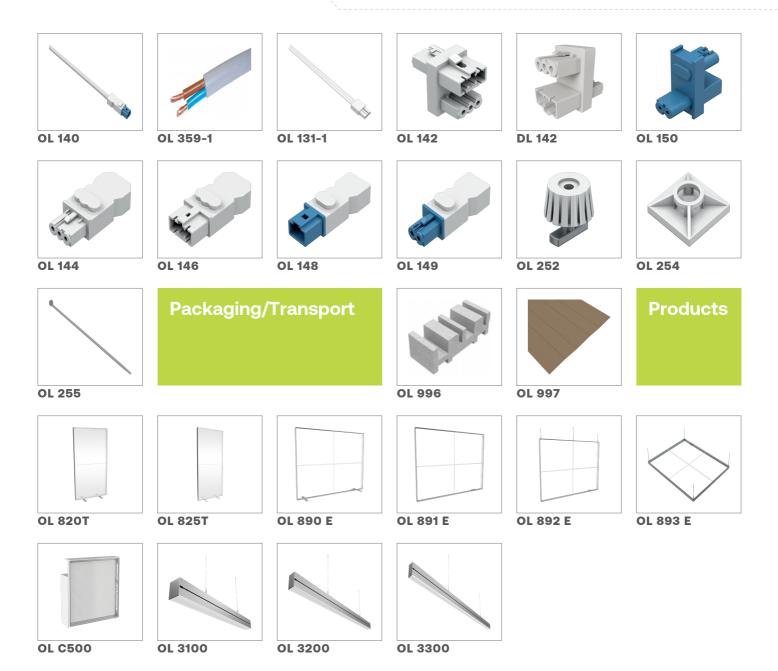

Basic parts

Tension fabric extr.


without system groove for single-sided illumination




M 1935.01

for single-sided illumination, without system groove, graphics with silicone edge M 1313 $\,$

aluminium | L 6000 × W 80 × H 40 mm | 21.109 lbs





Square extrusion


4 system grooves L 5000 × W 80 × H 80 mm




M 1020.01

adaptors with tension lock M 1101 / M 1103, adaptors with safety tension lock M 1114 / M 1116 and adaptor for hinged end plates M 1281 can be mounted, with 4 system grooves

aluminium | L 5000 × W 80 × H 80 mm | 25.384 lbs





Corner upright


90° without W 2850



M 1053.01

 $1\times extrusion$ made of M 1020, 80 mm square extrusion, without adjustable foot W 2850

aluminium | L 80 \times W 80 \times H 2480 mm | 21.094 lbs



■ Attention: without adjustable foot W 2850

Corner upright extrusion


90° corner, round L 6000 × W 120 × H 120 mm




M 260.01

for connecting extrusions with width 16, 40, 80, 120 mm, OCTAwall pro or OCTAwall 40 frames, fabric can be stretched over the extrusion

aluminium | L 6000 × W 120 × H 120 mm | 56.217 lbs





Fixing set

for OCTAlumina frames L 57 × W 30 × H 30 mm




W 835.37

to connect 2 \times OCTAlumina frame with or without upright steel | L 57 \times W 30 \times H 30 mm | 0.073 lbs







Basic parts

Internal connector


90° for OCTAlumina 80 frames




OL 238.37

for 90° connection of 2 OCTAlumina 80 frames without corner upright, with 2 \times hammehead screw M 1472 and 1× fixing set W 835

steel | L 55 × W 40 × H 50 mm | 0.423 lbs





7 Fabric has to be cut in the area of the connection

Corner connector


90° lock chamber 16 × 12 mm




M 1965B.00

90°, for extrusions with 16 × 12 mm tension lock chamber, with 2 × E 111 countersunk screw and E 111/20

zinc die cast | L 55 × W 55 × H 16 mm | 0.112 lbs





Corner connector


90° lock chamber 21 × 12 mm




Z 966.00

90°, for lock chamber 21 × 12 mm, with 2 × E 111 and E 111/20 countersunk screw

aluminium | L 90 × W 90 × H 8 mm | 0.181 lbs





Internal connector


straight for extrusions M 1925 / M 1935



M 1967.00

straight, for lateral connection of M 1925 and M 1935 frame profiles with 16 \times 12 mm tension lock chamber, incl. 2 \times E 111/m (M6) countersunk screw

aluminium | L 180 × W 16 × H 12 mm | 0.207 lbs

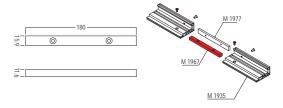

Internal connector


straight for extrusions M 1935



M 1977.00

straight, for lateral connection of M 1935 frame profile with 21 × 8.5 mm tension lock chamber, incl. 2 × E 111/m (M6) countersunk screw

aluminium | L 180 × W 21 × H 8 mm | 0.187 lbs

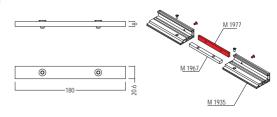

Basic parts

Beam extrusion

2 system grooves L 5000 × W 40 × H 16 mm



Z 4400.01

2 system grooves, tension lock Z 961/13 can be mounted, groove depth 7 $\rm mm$

aluminium | L 5000 × W 40 × H 16 mm | 7.055 lbs



Internal connector


straight, toolless lock chamber 21 × 12 mm



Z 977.90

straight, toolless, for all beam extrusions with lock chamber 21 \times 12 mm and hole 13 mm dia., with push button setting for assembly without tools

aluminium | L 180 \times W 21 \times H 12 mm | 0.234 lbs



Tension lock


13 mm L 70 × W 21 × H 13 mm



Z 961/13.00

13 mm, for all beam extrusions with lock chamber 21 \times 12 mm as well as in conjunction with adaptor Z 161/A, for beam extrusions with lock chamber 39 \times 12 mm

zinc die cast/steel | L 70 \times W 21 \times H 13 mm | 0.115 lbs



Accessories

Adjustable foot


M10 L 60 × W 60 × H 75 mm




W 2850.37

M10 thread, to adjust height of frames/extrusions from the top with hex-star T30 $\,$

steel | L 60 × W 60 × H 75 mm | 0.249 lbs





Base plate


for free standing walls L 600 × W 100 × H 20 mm



OL 200.21

for free standing walls, incl. 1 \times slot nut OL 215 and mounting parts, max . frame height = 2500 mm

steel | L 600 × W 100 × H 20 mm | 8.369 lbs

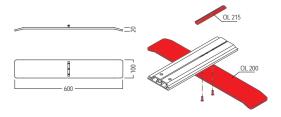

■ Attention: max. frame height = 2500 mm

Slot nut


without screw accessories for base plate OL 200



OL 215.00

for base plate OL 200, without screw accessories, 3 \times M6 thread (-30/0/+30), matching screw accessories: 1 \times M 1334/20 and 2 \times M 1510/20

aluminium | L 80 × W 10 × H 6 mm | 0.02 lbs

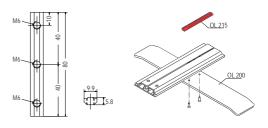

End plate


for 80 mm extrusions for M 260




M 261.21

for Quarter-round extrusion M 260 in connection with 80 mm extrusions, to create top and bottom horizontal fabric groove, with drilling 11 mm dia. for adjustable foot

steel | L 120 \times W 120 \times H 6 mm | 0.739 lbs





End cap


for drill hole 8 mm dia. L 13 × W 13 × H 12 mm



M 1491.35

to cover drill holes with 8 mm dia., similar to RAL 7035 plastic, light grey | L 13 \times W 13 \times H 12 mm |





Accessories

Screw eye

opening 20 mm dia. for ceiling suspension



OL 220.37

for vertical ceiling suspension, opening 20 mm dia., thread M8 steel | L 36 × W 36 × H 25 mm | 0.139 lbs





Universal retainer



OL 234.37

ceilling suspension/wall mount of for single sided frames, for wall mounting and horizontal ceiling for extrusions M 1915/M 1935 of suspension, with eye bolt, can be used with M 1915 and M 1935 steel | L 95 × W 35 × H 35 mm | 0.375 lbs







■ after removing the eye bolt, can be used for wall mounting

Electrical parts


LED module

3 LEDs 768 lm / 6,48 W / 24 V



OL 323.90

3 LEDs per unit, 6.48 W / 24 V, 6500 K, 768 lumen, with wiring for connecting to the power supply unit, incl. 2 × fixing set OL 252 plastic/aluminium | L 240 × W 28 × H 15 mm | 0.128 lbs

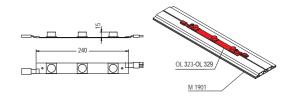


LED module

5 LEDs 1280 lm / 10,8 W / 24 V



OL 325.90

5 LEDs per unit, 10.80 W / 24 V, 6500 K, 1280 lumen, with wiring for connecting to the power supply unit, incl. 2 × fixing set OL 252 plastic/aluminium | L 400 × W 28 × H 15 mm | 0.185 lbs




LED module

7 LEDs 1792 lm / 15,12 W / 24 V



OL 327.90

7 LEDs per unit, 15,12 W / 24 V, 6500 K, 1792 lumen, with wiring for connecting to the power supply unit, incl. 2 × fixing set OL 252 aluminium/plastic | L 560 × W 28 × H 15 mm | 0.245 lbs

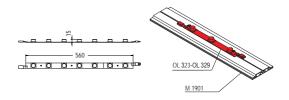


LED module

9 LEDs 2300 lm / 19,52 W / 24 V



OL 329.90

9 LEDs per unit, 19,52 W / 24 V, 6500 K, 2300 lumen, with wiring for connecting to the power supply unit, incl. 2 × fixing set OL 252 aluminium/plastic | L 720 × W 28 × H 15 mm | 0.313 lbs

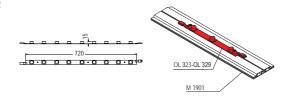

PWM Dimmer


for OL 323-329, OL 501-504 L 135 × W 30 × H 20 mm



OL 182.90

1 × control unit and remote control for dimming of OCTANORM LED modules OL 323 - OL 329 and OL 501 - OL 504, Voltage AC 85 - 265 V, max. output current 10 A, max. output signal current 40 mA, output signal PWM 5 V Signal

plastic | L 135 × W 30 × H 20 mm | 0.227 lbs



nolly in combination with OL 323-329, OL 501-504

Electrical parts

Dimmer

Dali LED for OL 323 - OL 329



OL 183.90

Dali LED dimmer for OCTANORM LED modules OL 323 - OL 329, output can be controlled via DALI or SwitchDim2, input voltage from 12V to 48V DC, max. connection current 8A, PWM output (16Bit)

plastic | L 59 × W 33 × H 15 mm | 0.037 lbs



noly in combination with OL 323 - OL 329

Power supply


36 W for LEDs



OL 191.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 0.8 A, output: 24 V DC, 1.5 A, 36 W, cable length 1000 mm

plastic, black | L 79 × W 54 × H 33 mm | 0.461 lbs



OL 149 necessary, max. load only up to 29 W recommended for long life soan of the LED power supply unit

Power supply


60 W for LEDs



OL 108.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 0.64 A, Output: 24 V DC, 2,5 A, 60 W, plug connection at both ends, includes 2 \times OL 252 mounting set

aluminium/plastic | L 171 × W 62 × H 37 mm | 1.592 lbs

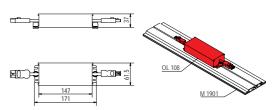

max. load only up to 48 W recommended for long life soan of the LED power supply unit

Power supply


100 W



OL 100.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 1.1 A, output: 24 V DC, 4.16 A, 100 W, plug connection at both ends, includes 2 \times OL 252 mounting set

aluminium/plastic | L 200 × W 65 × H 39 mm | 2.03 lbs



max. load only up to 80 W recommended for long life soan of the LED power supply unit

Power supply


150 W for LEDs



OL 102.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 1.7 A, output: 24 V DV, 6.3 A, 150 W, plug connection at both ends, includes 2 \times OL 252 mounting set

aluminium/plastic | L 228 \times W 68 \times H 39 mm | 2.588 lbs



max. load only up to 120 W recommended for long life span of the LED power supply unit

Electrical parts

Power supply


240 W for LEDs



OL 98.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 4.0 A, output: 24 V DV, 10,0 A, 240 W, plug connection at both ends, includes 2 \times OL 252 mounting set

aluminium/plastic | L 244 × W 68 × H 39 mm | 2.687 lbs

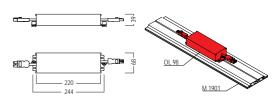

max. load only up to 192 W recommended for long life soan of the LED power supply unit


Power supply

100 W (Slim Line) installation in frame



OL 104/1.90

for installation in OCTAlumina 40/80/120 frames, Input: 200-240 V AC, 50/60 Hz, 0.95 A, Output: 24 V DC, 4,17 A, 100 W plastic | L 298 \times W 30 \times H 16.5 mm | 0.487 lbs




Power supply

150 W (Slim Line) installation in frame



OL 106/1.90

for installation in OCTAlumina 40/80/120 frames, input: 200-240 V AC, 50/60 Hz, 1.0 A, output: 24 V DC, 6.25 A, 150 W plastic | L 320 \times W 30 \times H 22 mm | 0.536 lbs



■ Only suitable for 230 volts! Not for USA and Canada!

Power supply


200 W (Slim Line) installation in frame



OL 206/1.90

for installation in OCTAlumina 40/80/120 frames, input: 200-240 V AC, 50/60 Hz, 1.6 A, output: 24 V DC, 8.33 A, 200 W

plastic | L 360 × W 30 × H 23 mm | 0.95 lbs



■ Only suitable for 230 volts! Not for USA and Canada!

Power cable


for LED PSU 2000 mm long



OL 122.90

Mains connection cable, socket - SchuKo plug, 3 poles, rated voltage 250 V, rated current 16 A, cable type H05VV-F, conductor nominal cross-section 1.5 mm²

plastic, white | 2000 mm long | 0.611 lbs



◄ for PSU OL 98 / OL 100 / OL 102 / OL 108

Electrical parts

Connecting cable


external, 24V 1000 mm long



OL 139.30

for connecting a LED module to the power supply unit, if the distance between LED power supply and LED module is too big, incl. plug OL 148 on one side, $24\ V/10\ A$

plastic | 1000 mm long | 0.194 lbs



after cutting the cable to size the female plug OL 149 has to be mounted on the other side

Connecting cable


external, 24V 3000 mm long



OL 140.30

for connecting a LED module to the power supply unit, if the distance between LED power supply and LED module is too big, incl. plug OL 148 on one side, 24 V/10 A

plastic | 3000 mm long | 0.553 lbs



after cutting the cable to size the female plug OL 149 has to be mounted on the other side


Connecting cable

2-wire 1000 mm long



OL 359-1.90

2 wire cable (brown, blue), PVC hose cable white plastic, white \mid 1000 mm long \mid 0.126 lbs



Extension cable

internal, 24 V 300 mm long



OL 131-1.90

24 V, for LED modules OL 3... and OL 5..., with plug for additional power source if series connection of LED modules exceeds 100 W, 24 V

plastic, white \mid 300 mm long \mid 0.033 lbs



Weitere Abmessungen:

OL 133-1.90

OL 135-1.90

OL 137-1.90

500 mm lang 0.037 lbs 1000 mm lang 0.084 lbs 3000 mm lang 0.243 lbs

After adjusting the cable length, the plug OL 148 has to be attached on the other side

Electrical parts

Distributor block


250 V/16 A for 2 × PSU



OL 142.90

for connecting two power supply units OL 100 and/or OL 102 to the 2 m long power cable OL 122,1 input / 2 output, 3 poles, 250 V/16 A

plastic, white | L 32 × W 22 × H 35 mm | 0.031 lbs



Distributor block

250 V/16 A for 3 × PSU



DL 142.90

for connecting 3 power supply units to 2 m power cable OL 122, 1 input / 3 output, 3 poles, 250 V/16 A $\,$

plastic, white | L 36 × W 22 × H 33 mm | 0.035 lbs





Distributor block


24V / 16A for 2 × LED module



OL 150.30

to be used in combination with OL 123 / OL 125 / OL 127 / OL 129, 2 poles, 1 input / 2 output, 24V / 16A

plastic | L 35 \times W 34 \times H 16 mm | 0.013 lbs



Female connector


250V / 16A for DIY assembly



OL 144.30

for DIY assembly, 3 pole, with strain relief, use with power cable OL 122, 250V / 16A $\,$

plastic, white | L 53 \times W 23 \times H 14 mm | 0.018 lbs



Male plug


250V / 16A for DIY assembly



OL 146.30

for DIY assembly of OL 98 / OL 100 / OL 102 / OL 104 / OL 106 / OL 108 PSUs, 3-pole, with strain relief, 250V / 16A

plastic, white | L 53 \times W 23 \times H 14 mm | 0.055 lbs



Electrical parts

Male plug


24V / 16A for DIY assembly



OL 148.90

for DIY assembly of 24 V OL 135-1 / OL 137-1 connection cable, 2-pole, with strain relief, 24V / 16A $\,$

plastic | L 53 × W 18 × H 14 mm | 0.018 lbs



Female connector


24V / 16A for DIY assembly



OL 149.90

for DIY assembly of OL 98 / OL 100 / OL 102 / OL 104 / OL 106 / OL 108 power supply units, or 24 V OL 139 / OL 140 connection cable, 2-pole, with strain relief, 24V / 16A

plastic | L 53 × W 18 × H 14 mm | 0.018 lbs




Fixing set


for LEDs / PSU L 14 × W 14 × H 12 mm



OL 252.90

for mounting OL 123 / OL 125 / OL 127 / OL 129 LED modules and OL 98 / OL 102 / OL 108 power supply units on frame extrusion steel/plastic | L 14 \times W 14 \times H 12 mm | 0.009 lbs





Adhesive base


100 pcs for cable ties OL 255



OL 254.90

for wire management with wire ties OL 255 (not included), max. width wire ties 4 mm, packaging unit 100 pcs.

plastic, white | L 19 \times W 19 \times H 5 mm | 0.157 lbs



Cable tie

100 pcs L 155 × W 2.5 mm



OL 255.90

for wire management with fixing set for cable ties, packaging unit: 100 $\ensuremath{\mathsf{pcs}}$

plastic, white | L 155 \times W 2.5 mm | 0.112 lbs



Packaging/Transport

Foam inlay


for M 1935 L 250 × W 75 × H 105 mm



OL 996.90


for safe transportation of M 1935 frame profiles with mounted LED modules $\,$

foam | L 250 × W 75 × H 105 mm | 0.095 lbs



Cardboard


for M 1935 L 1134 × W 1075 × H 6.5 mm



OL 997.90

for packaging of OCTAlumina 80 frames, fits 4 M 1935 frame profiles fitted with LED modules when using OL 996 moulded foam parts, 320 rm/palet, with embossing for easy folding, weight per palet: $276.00\ kg$

cardboard | L 1134 × W 1075 × H 6.5 mm | 1.722 lbs



length has to be cut to frame parts

Products

Light frame

lite with base plates




OL 820T.01

 $1\times$ freestanding frame for double sided back-lit graphic, for toolless assembly, vertically $1\times$ divided, LED modules mounted, luminous color: 6500K, luminous flux: 9600 lm, wattage: 40 W, incl. 2 m cable with Schuko plug and power supply, incl. $2\times$ swiveling base plate, incl. padded transport bag with castors, frames are delivered disassembled, without fabric/graphic

aluminium | W 1000 × H 2000 × D 80 mm | 23.589 lbs





Light frame

with base plates W 1000 × H 2000 × D 80 mm




OL 825T.01

 $1\times$ freestanding frame for double sided back-lit graphic, for toolless assembly, vertically $2\times$ divided, LED modules mounted, luminous color: 6500 K, luminous flux: 9600 lm, wattage: 40 W, incl. 2 m cable with Schuko plug and power supply, incl. $2\times$ swiveling base plate and $2\times$ adaptor for extension to H 2500 mm, incl. padded transport bag with castors, frames are delivered disassembled, without fabric/graphic

aluminium | W 1000 × H 2000 × D 80 mm | 25.794 lbs





Light frame


with base plates 80 mm, custom size



OL 890 E.01

 $1\times$ free standing frame element for single sided back-lit graphics, with LED modules and LED power supply unit mounted, incl. 2 m cable with plug and base plates

aluminium | 80 mm, custom size |



- without fabric/graphics (fabric dimensions = outer frame dimensions)
- ${\color{red} {\bf 7}}$ custom size: please advise dimensions when placing the order

Light frame


without base plates 80 mm, custom size



OL 891 E.01

1 × frame element for single sided back-lit graphics, with LED modules and LED power supply unit mounted, incl. 2 m cable with plug, without base plates

aluminium | 80 mm, custom size |



- without fabric/graphics (fabric dimensions = outer frame dimensions)
- custom size: please advise dimensions when placing the order

Light frame


vertically suspended 80 mm, custom size



OL 892 E.01

1 × frame element for single sided back-lit graphics, for vertical ceiling suspension, LED modules and LED power supply unit mounted, incl. 2 m cable and eyebolts OL 220 (number according to frame size)

aluminium | 80 mm, custom size |



- without fabric/graphics (fabric dimensions = outer frame dimensions)
- custom size: please advise dimensions when placing the order

Products

Light frame


horizontally suspended 80 mm, custom size



OL 893 E.01

 $1\times$ frame element for single sided back-lit graphics, for horizontal ceiling suspension or wall mounting, LED modules and LED power supply unit mounted, incl. 2 m cable and universal retainers OL 230 (number according to frame size)

aluminium | 80 mm, custom size |



- without fabric/graphics (fabric dimensions = outer frame dimensions)
- custom size: please advise dimensions when placing the order

Counter


80 mm, illuminated B1



OL C500.90

with lockable wing doors, incl. 1 \times shelf, OCTAlumina 80 (single-sided) front frame, pre-assembled LED modules and PSU, space-saving foldable side panels, easy assembly, with fabric, Fire rating B1, outer frame dimensions: W 1000 \times H 1129 mm

aluminium, white (RAL 9010) | W 1000 × H 1200 × D 448 mm | 93.696 lbs



- ▼ without fabric/graphics
- ▼ fabric dimensions = outer frame dimensions

Pendant light


1 illuminated side L 1000 × W 80 × H 80 mm




OL 3100.01 | .03

Set consisting of: 1 × upright L 1022-1000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 x 3.500 mm OL 466, 2 × wire rope retainer set L 222

aluminium | L 1000 \times W 80 \times H 80 mm | 9.052 lbs





Pendant light


1 illuminated side L 2000 × W 80 × H 80 mm



OL 3200.01 | .03

Set consisting of: 1 × upright L 1022-2000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 x 3.500 mm OL 466, 2 × wire rope retainer set L 222

aluminium | L 2000 × W 80 × H 80 mm | 15.284 lbs

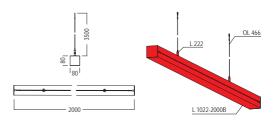

Pendant light


1 illuminated side L 3000 × W 80 × H 80 mm




OL 3300.01 | .03

Set consisting of: 1 × upright L 1022-3000B, 1 × power cable L 204, 1 × RGB remote control L 185-2, 2 × steel rope 1,5 × 3.500 mm OL 466, 2 × wire rope retainer set L 222

aluminium | L 3000 × W 80 × H 80 mm | 21.786 lbs

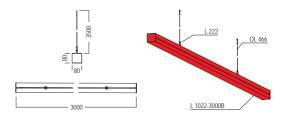

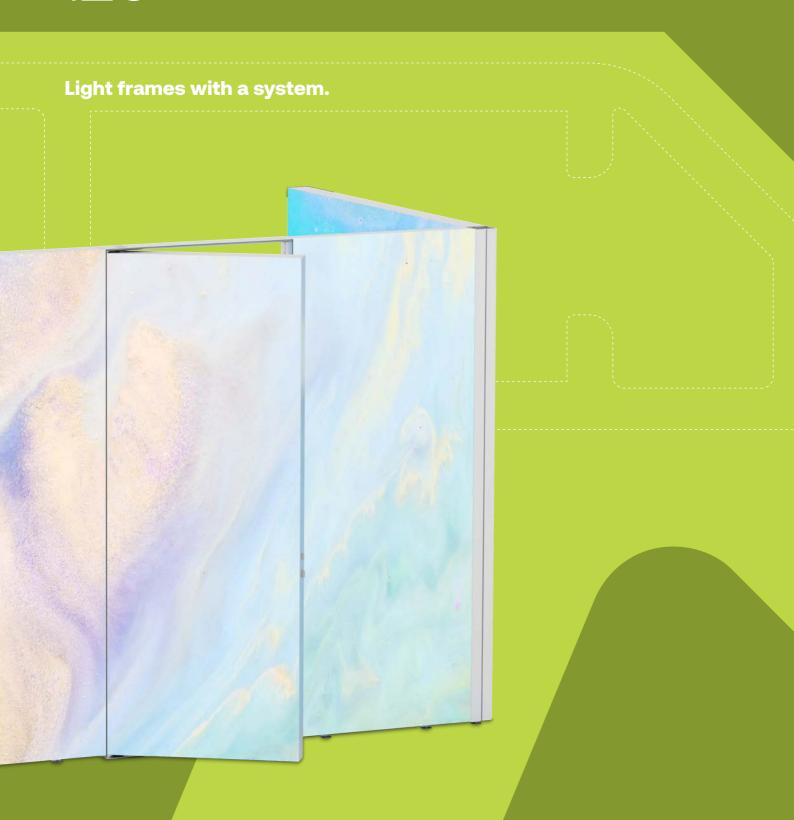

Index

7 TECHNICAL FEATURES	372
▼ OVERVIEW	376
7 COMPONENTS	
7 Basic parts	379
Accessories Acces	385
⊅ Doors	388
∍ Electrical parts	389
¬ Packaging/Transport	396
7 Products	397



Technical features



modern power LEDs



numerous frame colors



integrated electric components



120 mm double-sided



individual suspension



120 mm single-sided



plug & play



120 mm door



silicone edge graphics

Two extrusions. For every requirement.

Our **octalumina** frames with lateral feed-in are available with 120 mm depth for single or double-sided illumination. Both can be powder-coated in all RAL colors – for all spatial and color requirements.

Compelling quality. Amazing luminosity.

Our high-quality components are pre-assembled with power LEDs, ensuring a brilliant illumination with radiant colors. Other advantages: their longevity and low energy requirements.

Set up. Dismantle. Again and again.

The high-quality materials are designed for long-term use. The aluminium used and the tried and tested connection technology permit repeated assembly over many years. Just about for the display and retail sector with changing locations and areas.



Technical features



modern power LEDs



numerous frame colors



integrated electricity components



120 mm double-sided



plug & play



silicone edge graphics

max.





small pack size



sizes $X \times Y mm$

choice of size

Toolless. The new magic word.

No more forgetting your tools. You always have them with you: your hands. Push-buttons, plug-in connections or knurled screws - octalumina toolless has been designed in such a way that no tools are required for assembly.

Individual custom sizes instead of standard ones.

Our illuminated frames do not come off the shelf: Available in almost every size from W 900 × H 1500 mm to W 3000 × H 2500 mm, octalumina toolless is manufactured according to your specifications.

Losing small parts? A thing of the past!

The innovative connection technology can completely do without any loose small parts. No more improvising or searching for the right screws. With this system, all required components remain in place.

A large frame in a small space.

octalumina toolless is always close at hand. With a maximum extrusion length of 1500 mm, the system fits easily into a car. Just perfect for short-term assignments or quick changes of location.

Mobile. Yet stable.

The toolless design allows the construction of up to 3 m wide light frames. Bracings between the frame extrusions make for additional stability.

Overview

Basic parts M 1901 M 1915 M 225 M 226 M 260 M 253 W 835 Z 965B Z 965B-M Z 990 **OL 240 OL 240M** M 1208 Z 4400 OL 290 **OL 290T** Z 978 Z 977 M 1504 M 1322/I OL 242 **OL 244** Accessories OL 270 Z 962-T Z 961/8 Z 961/13 W 2850 OL 200 OL 210 OL 215 M 261 M 271

M 1491

OL 220


OL 230

OL 232


OL 234

OL 236

Overview

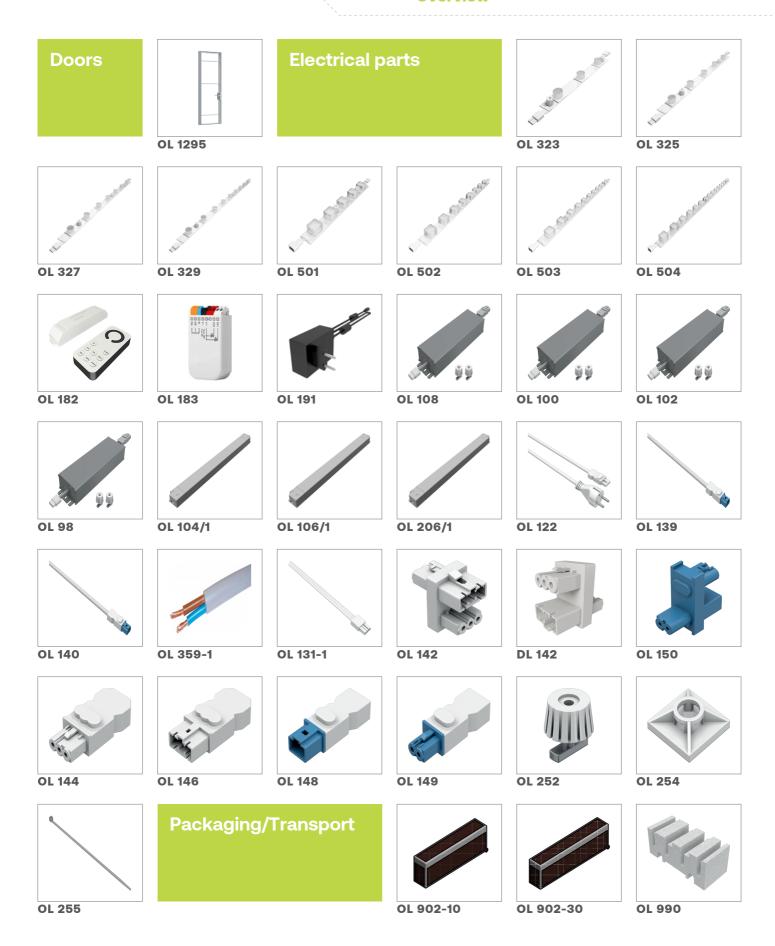

Overview

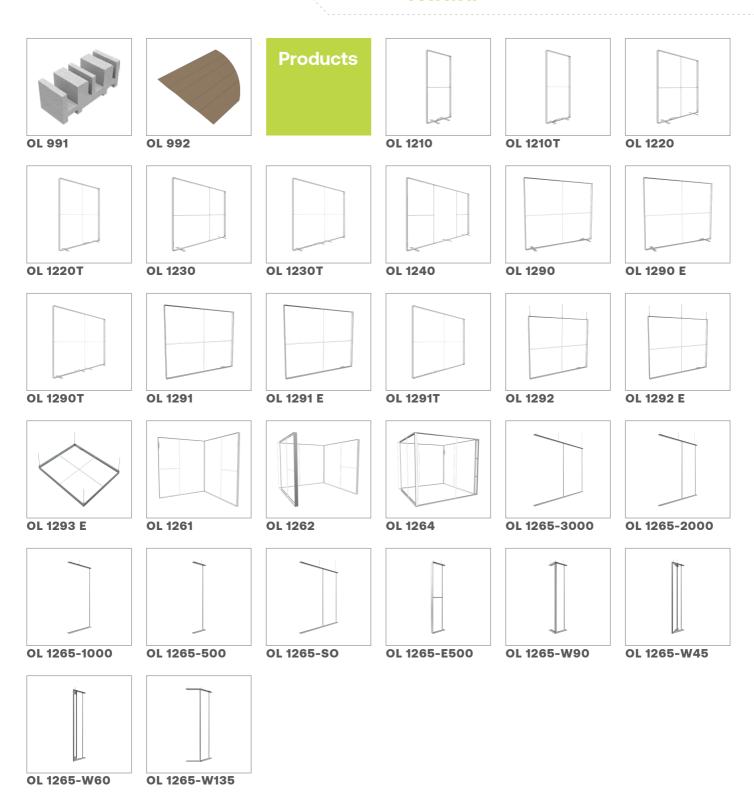

Basic parts

Tension fabric extr.


w/o system groove for double-sided illumination



M 1901.01

for double-sided illumination, without system groove, graphics with silicone edge M 1313 $\,$

aluminium | L 6000 × W 120 × H 16 mm | 21.539 lbs





Tension fabric extr.


w/o system groove for single-sided illumination




M 1915.01

for single-sided illumination, without system groove, graphics with silicone edge M 1313 $\,$

aluminium | L 6000 × W 120 × H 40 mm | 26.244 lbs





Square extrusion


4 system grooves L 5000 × W 120 × H 120 mm




M 225.01

adaptors with tension lock M 1102 / M 1122, adaptors with safety tension lock M 1124 / M 1126, with 4 system grooves

aluminium | L 5000 × W 120 × H 120 mm | 43.664 lbs





Square extrusion


L 6000 × W 120 × H 120 mm 6000 mm long




M 226.01

adaptors with tension lock M 1102 / M 1122, adaptors with safety tension lock M 1124 / M 1126

aluminium | L 6000 \times W 120 \times H 120 mm | 50.062 lbs





Corner upright


90° without W 2850




M 253.01

 $1\times$ extrusion manufactured from 120 mm square extrusion M 225, without adjustable foot W 2850

aluminium | L 120 \times W 120 \times H 2480 mm | 21.094 lbs





■ Attention: without adjustable foot W 2850

Basic parts


Corner upright extrusion | M 260.01


90° corner, round L 6000 × W 120 × H 120 mm



for connecting extrusions with width 16, 40, 80, 120 mm, OCTAwall pro or OCTAwall 40 frames, fabric can be stretched over the extrusion

aluminium | L 6000 × W 120 × H 120 mm | 56.217 lbs






Fixing set

for OCTAlumina frames L 57 × W 30 × H 30 mm




W 835.37

to connect 2 × OCTAlumina frame with or without upright steel | L 57 × W 30 × H 30 mm | 0.073 lbs







Corner connector


90° lock chamber 21 × 12 mm




Z 965B.00

90°, for extrusions with lock chamber 21 × 12 mm, incl. 2 × hex-star screw E 111 and E 111/20

zinc die cast | L 55 \times W 21 \times H 12 mm | 0.168 lbs





→ steep thread

Corner connector


90°, toolless lock chamber 21 × 12 mm




Z 965B-M.00

 $90^{\circ},$ toolless, for extrusions with lock chamber 21 × 12 mm, incl. 1 × countersunk screw E 111 and E 111/20

zinc die cast | L 55 × W 21 × H 12 mm | 0.152 lbs





Corner connector


90° lock chamber 21 × 12 mm




Z 990.00

 90° , for extrusions with 21×12 mm lock chamber, incl. $2 \times M10$ threads for adjustable foot C 440/F, incl. 2 \times hex-star screw E 111 and F 111/20

zinc die cast | L 96 × W 96 × H 12 mm | 0.309 lbs





Basic parts

Internal connector


straight lock chamber 21 × 12 mm



OL 240.00

straight, for lateral connection of frame profiles with 21 $\!\times$ 12 mm lock chamber, incl. 2 $\!\times$ countersunk screws E 111/m (M6)

aluminium | L 180 × W 21 × H 12 mm | 0.267 lbs



Internal connector


straight, toolless L 180 × W 20.6 × H 11.6 mm




OL 240M.00

for pluggable and dismountable connections, bolted on one side, incl. 1 \times countersunk-head screw E 111/m, 1 \times countersunk-head screw M 1510/20

aluminium | L 180 × W 20.6 × H 11.6 mm | 0.273 lbs






Round extrusion

for bracing L 5000 × W 26.3 × H 26.3 mm



M 1208.85


for frame bracing tension lock Z 961/8 can be mounted aluminium | L 5000 \times W 26.3 \times H 26.3 mm | 4.78 lbs





Beam extrusion


2 system grooves L 5000 × W 40 × H 16 mm



Z 4400.01

2 system grooves, tension lock Z 961/13 can be mounted, groove depth 7 $\rm mm$

aluminium | L 5000 \times W 40 \times H 16 mm | 7.055 lbs




Internal connector


for bracing M 1208 L 30 × W 46 × H 30 mm



OL 290.85

for connection of bracing extrusionss M 1208 (inside light frame) aluminium | L 30 \times W 46 \times H 30 mm | 0.055 lbs





Basic parts

Internal connector


toolless for bracing M 1208



OL 290T.85

connecting part made out of M 1202, for bracing M 1208 of OCTAlumina toolless frames

aluminium | L $30 \times W 40 \times H 40 \text{ mm}$ | 0.077 lbs

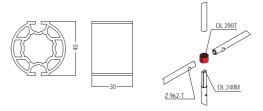

Internal connector


straight, toolless lock chamber 21 × 12 mm




Z 978.90

straight, toolless, for vertical connection of upright extrusions with lock chamber of 21 \times 12 mm and holes 8 mm dia., with push button setting for assembly without tools

aluminium | L 180 \times W 21 \times H 12 mm | 0.24 lbs





Internal connector


straight, toolless lock chamber 21 × 12 mm



Z 977.90

straight, toolless, for all beam extrusions with lock chamber 21 \times 12 mm and hole 13 mm dia., with push button setting for assembly without tools

aluminium | L 180 × W 21 × H 12 mm | 0.234 lbs



Tension fabric extr.


for corner solution for illumination




M 1504.01

for corner solution, for illumination, for graphics with silicone edge M 1313, suspendable

aluminium | L 6000 \times W 47 \times H 16 mm | 10.075 lbs





■ Attention: maximum size of cube 2500 × 2500 × 2500 mm

Tension fabric extr.


90° internal corner for single sided fabric



M 1322/I.01

 90° internal corner, for single sided fabric (with silicone edge M 1313), with 11 × hole 8.9 × 18 mm, for mounting in system groove: for 40 mm square extrusions use fixing set M 1348, for 80 mm and 120 mm square extrusions use fixing clip M 1339

aluminium | L 6000 × W 56.3 × H 27.8 mm | 10.172 lbs

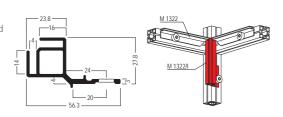

Basic parts

Retainer

for corner solution top/bottom




OL 242.85

 $1\times$ retainer top/bottom for corner solution, for mounting the vertical extrusion M 1504 and M 1322/I to the horizontal frame extrusion M 1901

steel, white | L 86 \times W 57 \times H 35 mm | 0.348 lbs







Retainer

for corner solution center



OL 244.85

1 \times retainer center for corner solution, for connection of vertical extrusion M 1504 and M 1322/I with extrusion lengths over 1500 mm

steel, white | L 88 \times W 30 \times H 28 mm | 0.22 lbs







Fabric divider


for corner solution for light division



OL 270.30

for light division in OCTAlumina 120 corner solutions, mounted with velcro onto M 1504 and M 1322/I profile, blockout fabric white with loop tape

plastic | L 3000 × W 140 × H 2 mm | 0.644 lbs



Tension lock

toolless lock chamber 21 × 12 mm




Z 962-T.37

toolless, for all beam extrusions with lock chamber 21 \times 12 mm, incl. 1 \times knurled-head screw W 464/21 (M6x15)

steel | L 60 \times W 22 \times H 26 mm | 0.11 lbs





Tension lock


8 mm L 70 × W 20 × H 12 mm




Z 961/8.00

8 mm, for all beam extrusions with cross- or T-lock chamber 21 \times 12 mm

zinc die cast/steel | L 70 \times W 20 \times H 12 mm | 0.119 lbs





Basic parts

Tension lock


13 mm L 70 × W 21 × H 13 mm



Z 961/13.00

13 mm, for all beam extrusions with lock chamber 21 \times 12 mm as well as in conjunction with adaptor Z 161/A, for beam extrusions with lock chamber 39 \times 12 mm

zinc die cast/steel | L 70 \times W 21 \times H 13 mm | 0.115 lbs



Accessories

Adjustable foot


M10 L 60 × W 60 × H 75 mm




W 2850.37

M10 thread, to adjust height of frames/extrusions from the top with hex-star T30 $\,$

steel | L 60 × W 60 × H 75 mm | 0.249 lbs





Base plate


for free standing walls L 600 × W 100 × H 20 mm



OL 200,21

for free standing walls, incl. 1 \times slot nut OL 215 and mounting parts, max . frame height = 2500 mm

steel | L 600 × W 100 × H 20 mm | 8.369 lbs

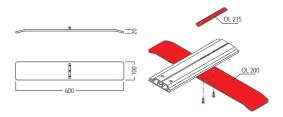

■ Attention: max. frame height = 2500 mm

Base plate


toolless L 440 × W 100 × H 20 mm



OL 210.21

toolless, rotates 90°, for a compact pack size, incl. mounting accessories

steel | L 440 \times W 100 \times H 20 mm | 3.12 lbs

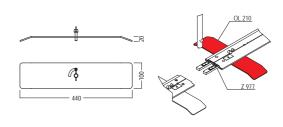

Slot nut


without screw accessories for base plate OL 200



OL 215.00

for base plate OL 200, without screw accessories, 3 \times M6 thread (-30/0/+30), matching screw accessories: 1 \times M 1334/20 and 2 \times M 1510/20

aluminium | L 80 \times W 10 \times H 6 mm | 0.02 lbs

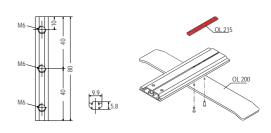

End plate


for 80 mm extrusions for M 260




M 261.21

for Quarter-round extrusion M 260 in connection with 80 mm extrusions, to create top and bottom horizontal fabric groove, with drilling 11 mm dia. for adjustable foot

steel | L 120 × W 120 × H 6 mm | 0.739 lbs





Accessories


End plate


for 120 mm extrusions for M 260



M 271.21

for Quarter-round extrusion M 260 in connection with 120 mm extrusions, to create top and bottom horizontal fabric groove steel | L 120 × W 120 × H 6 mm | 0.992 lbs





End cap


for drill hole 8 mm dia. L 13 × W 13 × H 12 mm



M 1491.35

to cover drill holes with 8 mm dia., similar to RAL 7035 plastic, light grey | L 13 × W 13 × H 12 mm |





Screw eye

opening 20 mm dia. for ceiling suspension



OL 220.37

for vertical ceiling suspension, opening 20 mm dia., thread M8 steel | L 36 × W 36 × H 25 mm | 0.139 lbs





Universal retainer


for extrusion M 1901




OL 230.37

ceilling suspension/wall mount for M 1901, for horizontal ceiling suspension or wall mounting, with 2 × self-tapping screws (Ø 3,5 mm/13 mm length), for extrusion

steel | L 62 × W 50 × H 43 mm | 0.39 lbs





After removing the eye bolt, can be used for wall mounting

Internal connector


for OCTAlumina 120 frames




OL 232.37

for 90° connection between 2 OCTAlumina 120 frames without corner upright, with 2 \times M 1472 hammerhead screws and 1 \times mounting set W 835

steel | W 75 × H 50 × D 60 mm | 0.527 lbs





7 fabric has to be cut in the area of the connection


Accessories

Universal retainer



OL 234.37

ceilling suspension/wall mount for extrusions M 1915/M 1935 for single sided frames, for wall mounting and horizontal ceiling suspension, with eye bolt, can be used with M 1915 and M 1935 steel | L 95 × W 35 × H 35 mm | 0.375 lbs

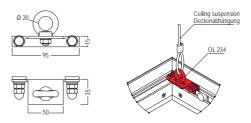

Universal retainer


with screw eye for wall and ceiling



OL 236.37

for installation of frame to wall and for horizontal ceiling suspension, with screw eye

steel | L 35 × W 50 × H 60 mm | 0.337 lbs



Doors

Door


DIN left/right for double-sided illumination



OL 1295.01

 $1\times$ door element, with illumination, DIN left or DIN right, outward or inward opening, lockable, can be mounted without tools between 2 frames and with tools to a corner (corner upright M 225), LED modules and LED power supply unit installed (6500 K, 12750 lm, 110 W), incl. $3\times$ cross bracing, 2 m cable with Euro plug, door handle set and lock cylinder

aluminium | W 1000 × H 2480 × D 120 mm | 70.547 lbs



- ▼ without fabric/graphics
- Measurement for prints = W 950 x H 2458 mm

Electrical parts


LED module

3 LEDs 768 lm / 6,48 W / 24 V



OL 323.90

3 LEDs per unit, 6.48 W / 24 V, 6500 K, 768 lumen, with wiring for connecting to the power supply unit, incl. 2 × fixing set OL 252 plastic/aluminium | L 240 × W 28 × H 15 mm | 0.128 lbs

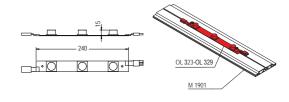


LED module

5 LEDs 1280 lm / 10,8 W / 24 V



OL 325.90

5 LEDs per unit, 10.80 W / 24 V, 6500 K, 1280 lumen, with wiring for connecting to the power supply unit, incl. 2 × fixing set OL 252 plastic/aluminium | L 400 × W 28 × H 15 mm | 0.185 lbs




LED module

7 LEDs 1792 lm / 15,12 W / 24 V



OL 327.90

7 LEDs per unit, 15,12 W / 24 V, 6500 K, 1792 lumen, with wiring for connecting to the power supply unit, incl. 2 × fixing set OL 252 aluminium/plastic | L 560 × W 28 × H 15 mm | 0.245 lbs

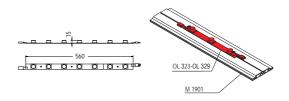


LED module

9 LEDs 2300 lm / 19,52 W / 24 V



OL 329.90

9 LEDs per unit, 19,52 W / 24 V, 6500 K, 2300 lumen, with wiring for connecting to the power supply unit, incl. 2 × fixing set OL 252 aluminium/plastic | L 720 × W 28 × H 15 mm | 0.313 lbs

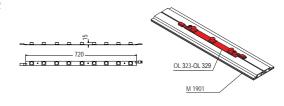

LED module


5 LEDs 1554 lm / 15 W / 24 V



OL 501.90

5 LEDs per unit, 15 W / 24 V, 6500 K, 1554 lm, Power-LED module 5 m $\,$

plastic | L 240 × W 24 × H 15 mm | 0.331 lbs



→ up to 5000 mm frame height

Electrical parts

LED module


8 LEDs 2552 lm / 24 W / 24 V



OL 502.90

8 LEDs per unit, 24 W / 24 V, 6500 K, 2552 lm, Power-LED module

plastic | L 400 × W 24 × H 15 mm | 0.282 lbs



7 up to 5000 mm frame height

LED module


11 LEDs 3540 lm / 33 W / 24 V



OL 503.90

11 LEDs per unit, 33 W / 24 V, 6500 K, 3540 lm, Power-LED Module

plastic | L 560 × W 24 × H 15 mm | 0.348 lbs



up to 5000 mm frame height

LED module


15 LEDs 4604 lm / 45 W / 24 V



OL 504.90

15 LEDs per unit, 45 W / 24 V, 6500 K, 4604 lm, Power-LED module 5 m

plastic | L 720 \times W 24 \times H 15 mm | 0.45 lbs



7 up to 5000 mm frame height

PWM Dimmer


for OL 323-329, OL 501-504 L 135 x W 30 x H 20 mm



OL 182.90

 $1 \times \text{control}$ unit and remote control for dimming of OCTANORM LED modules OL 323 - OL 329 and OL 501 - OL 504, Voltage AC 85 - 265 V, max. output current 10 A, max. output signal current 40 mA, output signal PWM 5 V Signal

plastic | L 135 \times W 30 \times H 20 mm | 0.227 lbs



noly in combination with OL 323-329, OL 501-504

Dimmer

Dali LED for OL 323 - OL 329



OL 183.90

Dali LED dimmer for OCTANORM LED modules OL 323 - OL 329, output can be controlled via DALI or SwitchDim2, input voltage from 12V to 48V DC, max. connection current 8A, PWM output

plastic | L 59 × W 33 × H 15 mm | 0.037 lbs



7 only in combination with OL 323 - OL 329

Electrical parts

Power supply

36 W for LEDs



OL 191.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 0.8 A, output: 24 V DC, 1.5 A, 36 W, cable length 1000 mm

plastic, black | L 79 × W 54 × H 33 mm | 0.461 lbs



OL 149 necessary, max. load only up to 29 W recommended for long life soan of the LED power supply unit

Power supply


60 W for LEDs



OL 108.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 0.64 A, Output: 24 V DC, 2,5 A, 60 W, plug connection at both ends, includes 2 \times OL 252 mounting set

aluminium/plastic | L 171 × W 62 × H 37 mm | 1.592 lbs

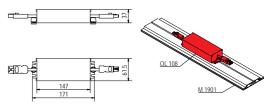

max. load only up to 48 W recommended for long life soan of the LED power supply unit

Power supply


100 W for LEDs




OL 100.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 1.1 A, output: 24 V DC, 4.16 A, 100 W, plug connection at both ends, includes 2 \times OL 252 mounting set

aluminium/plastic | L 200 × W 65 × H 39 mm | 2.03 lbs





max. load only up to 80 W recommended for long life soan of the LED power supply unit

Power supply


150 W



OL 102.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 1.7 A, output: 24 V DV, 6.3 A, 150 W, plug connection at both ends, includes 2 \times OL 252 mounting set

aluminium/plastic | L 228 \times W 68 \times H 39 mm | 2.588 lbs



max. load only up to 120 W recommended for long life span of the LED power supply unit

Power supply


240 W for LEDs



OL 98.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 4.0 A, output: 24 V DV, 10,0 A, 240 W, plug connection at both ends, includes $2\times$ OL 252 mounting set

aluminium/plastic | L 244 × W 68 × H 39 mm | 2.687 lbs



max. load only up to 192 W recommended for long life soan of the LED power supply unit

Electrical parts

Power supply


100 W (Slim Line) installation in frame



OL 104/1.90

for installation in OCTAlumina 40/80/120 frames, Input: 200-240 V AC, 50/60 Hz, 0.95 A, Output: 24 V DC, 4,17 A, 100 W

plastic | L 298 × W 30 × H 16.5 mm | 0.487 lbs




Power supply

150 W (Slim Line) installation in frame



OL 106/1.90

for installation in OCTAlumina 40/80/120 frames, input: 200-240 V AC, 50/60 Hz, 1.0 A, output: 24 V DC, 6.25 A, 150 W plastic \mid L 320 × W 30 × H 22 mm \mid 0.536 lbs



■ Only suitable for 230 volts! Not for USA and Canada!

Power supply

200 W (Slim Line) installation in frame



OL 206/1.90

for installation in OCTAlumina 40/80/120 frames, input: 200–240 V AC, 50/60 Hz, 1.6 A, output: 24 V DC, 8.33 A, 200 W plastic | L 360 \times W 30 \times H 23 mm | 0.95 lbs



■ Only suitable for 230 volts! Not for USA and Canada!

Power cable


for LED PSU 2000 mm long



OL 122.90

Mains connection cable, socket - SchuKo plug, 3 poles, rated voltage 250 V, rated current 16 A, cable type H05VV-F, conductor nominal cross-section 1.5 mm²

plastic, white | 2000 mm long | 0.611 lbs



 ${\color{red} \nearrow}$ for PSU OL 98 / OL 100 / OL 102 / OL 108

Connecting cable


external, 24V 1000 mm long



OL 139.30

for connecting a LED module to the power supply unit, if the distance between LED power supply and LED module is too big, incl. plug OL 148 on one side, 24 V/10 A $\,$

plastic | 1000 mm long | 0.194 lbs



after cutting the cable to size the female plug OL 149 has to be mounted on the other side

Electrical parts

Connecting cable

external, 24V 3000 mm long



OL 140.30

for connecting a LED module to the power supply unit, if the distance between LED power supply and LED module is too big, incl. plug OL 148 on one side, $24\ V/10\ A$

plastic | 3000 mm long | 0.553 lbs



after cutting the cable to size the female plug OL 149 has to be mounted on the other side


Connecting cable

2-wire 1000 mm long



OL 359-1.90

2 wire cable (brown, blue), PVC hose cable white plastic, white | 1000 mm long | 0.126 lbs



Extension cable

internal, 24 V 300 mm long



OL 131-1.90

24 V, for LED modules OL 3... and OL 5..., with plug for additional power source if series connection of LED modules exceeds 100 W, 24 V

plastic, white | 300 mm long | 0.033 lbs



Weitere Abmessungen:

OL 133-1.90

OL 135-1.90

OL 137-1.90

500 mm lang 1000 mm lang 3000 mm lang

0.037 lbs

0.084 lbs

0.243 lbs

After adjusting the cable length, the plug OL 148 has to be attached on the other side

Distributor block


250 V/16 A for 2 × PSU



OL 142.90

for connecting two power supply units OL 100 and/or OL 102 to the 2 m long power cable OL 122, 1 input / 2 output, 3 poles, 250 V/16 A

plastic, white | L 32 × W 22 × H 35 mm | 0.031 lbs



Electrical parts

Distributor block


250 V/16 A for 3 × PSU



DL 142.90

for connecting 3 power supply units to 2 m power cable OL 122, 1 input / 3 output, 3 poles, 250 V/16 A $\,$

plastic, white | L 36 × W 22 × H 33 mm | 0.035 lbs



Distributor block


24V / 16A for 2 × LED module



OL 150.30

to be used in combination with OL 123 / OL 125 / OL 127 / OL 129, 2 poles, 1 input / 2 output, 24V / 16A

plastic | L 35 × W 34 × H 16 mm | 0.013 lbs



Female connector


250V / 16A for DIY assembly



OL 144.30

for DIY assembly, 3 pole, with strain relief, use with power cable OL 122, 250V / 16A $\,$

plastic, white | L 53 \times W 23 \times H 14 mm | 0.018 lbs



Male plug


250V / 16A for DIY assembly



OL 146.30

for DIY assembly of OL 98 / OL 100 / OL 102 / OL 104 / OL 106 / OL 108 PSUs, 3-pole, with strain relief, 250V / 16A

plastic, white | L 53 × W 23 × H 14 mm | 0.055 lbs



Male plug


24V / 16A for DIY assembly



OL 148.90

for DIY assembly of 24 V OL 135-1 / OL 137-1 connection cable, 2-pole, with strain relief, 24V / 16A $\,$

plastic | L 53 \times W 18 \times H 14 mm | 0.018 lbs



Electrical parts

Female connector


24V / 16A for DIY assembly



OL 149.90

for DIY assembly of OL 98 / OL 100 / OL 102 / OL 104 / OL 106 / OL 108 power supply units, or 24 V OL 139 / OL 140 connection cable, 2-pole, with strain relief, 24V / 16A

plastic | L 53 × W 18 × H 14 mm | 0.018 lbs




Fixing set


for LEDs / PSU L 14 × W 14 × H 12 mm



OL 252.90

for mounting OL 123 / OL 125 / OL 127 / OL 129 LED modules and OL 98 / OL 102 / OL 108 power supply units on frame extrusion steel/plastic | L 14 \times W 14 \times H 12 mm | 0.009 lbs





Adhesive base


100 pcs for cable ties OL 255



OL 254.90

for wire management with wire ties OL 255 (not included), max. width wire ties 4 mm, packaging unit 100 pcs. $\,$

plastic, white | L 19 \times W 19 \times H 5 mm | 0.157 lbs



Cable tie


100 pcs L 155 × W 2.5 mm



OL 255.90

for wire management with fixing set for cable ties, packaging unit: 100 $\ensuremath{\mathsf{pcs}}$

plastic, white | L 155 × W 2.5 mm | 0.112 lbs



Packaging/Transport

Transport box

for OL 1210T / OL 1220 T L 1400 × W 280 × H 460 mm



OL 902-10.90

for OL 1210T / OL 1220 T, with carry handles and castors plastic/aluminium | L 1400 \times W 280 \times H 460 mm | 30.203 lbs




Transport box

for OL 1230T L 1650 × W 280 × H 460 mm



OL 902-30.90

for OL 1230T, with carry handles and castors plastic/aluminium | L 1650 × W 280 × H 460 mm | 33.289 lbs



Foam inlay


for extrusion M 1901 L 250 × W 95 × H 100 mm



OL 990.90

for safe transportation of M 1901 frame profiles with mounted LED modules $\,$

foam | L 250 \times W 95 \times H 100 mm | 0.095 lbs



Foam inlay


for extrusion M 1915 L 250 × W 95 × H 100 mm



OL 991.90

for safe transportation of M 1915 frame profiles with mounted LED modules $\,$

foam | L 250 \times W 95 \times H 100 mm | 0.095 lbs



Cardboard

for extrusion M 1901 / M 1915 L 1000 × W 1135 × H 6.5 mm



OL 992.90

for packaging of OCTAlumina 120 frames, fits 4 M 1901 or M 1915 frame profiles fitted with LED modules when using OL 990 or OL 991 moulded foam parts, with embossing for easy folding, 320 rm/palet, weight per palet: 276.00 kg

cardboard | L 1000 × W 1135 × H 6.5 mm | 1.984 lbs



■ length has to be cut to frame parts

Products

Light frame


with base plates W 1000 × H 2480 × D 120 mm



OL 1210.01

1 × free standing frame with bracing, for double-sided back-lit graphics, LED modules and LED power supply unit mounted, 6160 lumen, 60 watt , incl. 1 × cable 2 m with plug and 2 × base plate OL 200

aluminium | W 1000 × H 2480 × D 120 mm | 44.156 lbs





without fabric/graphics (fabric dimensions = outer frame dimensions)

Light frame


toolless, with base plates W 1000 × H 2480 × D 120 mm



OL 1210T.01

1 × free standing frame divided laterally in the middle, for double-sided back-lit graphics, toolless, LED modules and LED power supply unit mounted, incl. 1 × cable 2 m with plug and 2 × base plate OL 210, pack size: 1200 × 250 × 200 mm (9,5 kg), 1420 × 250 × 200 mm (10,5 kg)

aluminium | W 1000 \times H 2480 \times D 120 mm | 40.785 lbs



without fabric/graphics (fabric dimensions = outer frame dimensions)

Light frame


with base plates W 2000 × H 2480 × D 120 mm



OL 1220.01

1 × free standing frame with bracing, for double-sided back-lit graphics, LED modules and LED power supply unit mounted, 12320 lumen, 120 watt , incl. 1 × cable 2 m with plug and 2 × base plate OL 200

aluminium | W 2000 × H 2480 × D 120 mm | 54.963 lbs



without fabric/graphics (fabric dimensions = outer frame dimensions)

Light frame


toolless, with base plates W 2000 × H 2480 × D 120 mm



OL 1220T.01

1 × free standing frame divided laterally in the middle, for double-sided back-lit graphics, toolless, LED modules and LED power supply unit mounted, incl. 1 × cable 2 m with plug and 2 × base plate OL 210, pack size: 1280 × 260 × 200 mm (14 kg), 1420 × 260 × 200 mm (12 kg)


aluminium | W 2000 × H 2480 × D 120 mm | 54.454 lbs



without fabric/graphics (fabric dimensions = outer frame dimensions)

Light frame

with base plates W 3000 × H 2480 × D 120 mm



OL 1230.01

1 × free standing frame with bracing, for double-sided back-lit graphics, LED modules and LED power supply unit mounted, 14960 lumen, 144 watt , incl. 1 × cable 2 m with plug and 2 × base plate OL 200

aluminium | W 3000 × H 2480 × D 120 mm | 83.334 lbs

120



without fabric/graphics (fabric dimensions = outer frame dimensions)

Products

Light frame


toolless, with base plates W 3000 × H 2480 × D 120 mm



OL 1230T.01

1 × free standing frame divided laterally in the middle, for double-sided back-lit graphics, toolless, LED modules and LED power supply unit mounted, incl. 1 × cable 2 m with plug and 4 × base plate OL 210, pack size: 1790 × 260 × 200 mm (21.5 kg), 1420 × 260 × 200 mm (12 kg)

aluminium | W 3000 \times H 2480 \times D 120 mm | 73.854 lbs



without fabric/graphics (fabric dimensions = outer frame dimensions)

Light frame


with base plates W 4000 × H 2480 × D 120 mm



OL 1240.01

1 × free standing frame with bracing, for double-sided back-lit graphics, LED modules and LED power supply unit mounted, 19800 lumen, 195 watt , incl. 1 × cable 2 m with plug and 3 × base plate OL 200

aluminium | W 4000 × H 2480 × D 120 mm | 87.765 lbs



without fabric/graphics (fabric dimensions = outer frame dimensions)

Light frame


with base plates 120 mm, custom size



OL 1290.01

1 × free standing frame for double-sided back-lit graphics, LED modules and LED power supply unit mounted, incl. 1 × cable 2 m with plug and base plates OL 200

aluminium | 120 mm, custom size |



- without fabric/graphics (fabric dimensions = outer frame dimensions)
- ${\color{red} {\bf 7}}$ custom size: please advise dimensions when placing the order

Light frame


with base plates 120 mm, custom size



OL 1290 E.01

1 × free standing frame for single-sided back-lit graphics, LED modules and LED power supply unit mounted, incl. 1 × cable 2 m with plug and base plates OL 200

aluminium | 120 mm, custom size |



- without fabric/graphics (fabric dimensions = outer frame dimensions)
- ▼ custom size: please advise dimensions when placing the order

Light frame


toolless, with base plates 120 mm, custom size




OL 1290T.01

1 × free standing frame, for double-sided back-lit graphics, toolless, LED modules and LED power supply unit mounted, incl. 1 × cable 2 m with plug and base plates OL 200

aluminium | 120 mm, custom size |





- without fabric/graphics (fabric dimensions = outer frame dimensions)
- custom size: please advise dimensions when placing the order (X = max 3000 mm, Y = max 2480 mm)

Products

Light frame

without base plates 120 mm, custom size




OL 1291.01

1 × frame for double-sided back-lit graphics, LED modules and LED power supply unit mounted, incl. 1 × cable 2 m with plug, without base plates

aluminium | 120 mm, custom size |



custom size: please advise dimensions and position of the cable outlet when placing the order

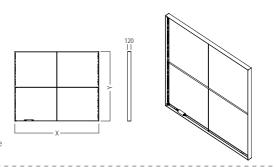

Light frame


without base plates 120 mm, custom size



OL 1291 E.01

1 × frame for single-sided back-lit graphics, LED modules and LED power supply unit mounted, incl. 1 × cable 2 m with plug, without base plates

aluminium | 120 mm, custom size |



- without fabric/graphics (fabric dimensions = outer frame dimensions)
- → custom size: please advise dimensions when placing the order

Light frame


toolless, with adjustable feet 120 mm, custom size



OL 1291T.01

 $1\times$ frame for double-sided back-lit graphics, toolless, LED modules and LED power supply unit mounted, incl. $1\times$ cable 2 m with plug and adjustable feet W 2850

aluminium | 120 mm, custom size |



- without fabric/graphics (fabric dimensions = outer frame dimensions)
- custom size: please advise dimensions when placing the order (X = max 3000 mm, Y = max 2480 mm)

Light frame


vertically suspended 120 mm, custom size




OL 1292.01

 $1\times$ frame element for double-sided back-lit graphics, LED modules and LED power supply unit mounted, incl. $1\times$ cable 2 m with plug and eyebolts OL 220 for vertical ceiling suspension (number according to frame size)

aluminium | 120 mm, custom size |





- without fabric/graphics (fabric dimensions = outer frame dimensions)
- ▼ custom size: please advise dimensions when placing the order

Light frame


vertically suspended 120 mm, custom size



OL 1292 E.01

 $1\times$ frame element for single-sided back-lit graphics, LED modules and LED power supply unit mounted, incl. $1\times$ cable 2 m with plug and eyebolts OL 220 for vertical ceiling suspension (number according to frame size)

aluminium | 120 mm, custom size |




- Without fabric/graphics (fabric dimensions = outer frame dimensions)
- custom size: please advise dimensions when placing the order

₹ octalumina 120

Products

Light frame


horizontally suspended 120 mm, custom size



OL 1293 E.01

 $1\times$ frame element for single-sided back-lit graphics, LED modules and LED power supply unit mounted, incl. $1\times$ cable 2 m with plug and universal retainers OL 230 for horizontal ceiling suspension or wall mounting (number according to frame size)


aluminium | 120 mm, custom size |



- without fabric/graphics (fabric dimensions = outer frame dimensions)
- custom size: please advise dimensions when placing the order

Light frame


L-shaped 120 mm, custom size



OL 1261.01

for double-sided backlit graphics, L-shaped corner structure with 120 mm extrusion width, LED modules and LED power supply unit mounted, incl. 2 m cable

aluminium | 120 mm, custom size |



- ▼ without fabric/graphics
- custom size: please advise dimensions when placing the order

Light frame


U-shaped 120 mm, custom size



OL 1262.01

for double-sided backlit graphics, U-shaped corner structure with 120 mm extrusion width, LED modules and LED power supply unit mounted, incl. 2 m cable

aluminium | 120 mm, custom size |



- → without fabric/graphics
- ${\color{red} {\bf 7}}$ custom size: please advise dimensions when placing the order

Light frame


rectangular corner 120 mm, custom size



OL 1264.01

for double-sided backlit graphics, rectangular corner structure with 120 mm extrusion width, LED modules and LED power supply unit mounted, incl. 2 m cable

aluminium | 120 mm, custom size |



- ▼ without fabric/graphics
- custom size: please advise dimensions when placing the order

Light frame element


vertically suspended W 3000 × H X × D 120 mm



OL 1265-3000.01

1 × frame element made of M 1901 with bracing, for double sided back-lit graphics, LED modules (17500 lm, 152 W) and power supply unit 240 W mounted, incl. 1 × cable 2 m with Schuko plug and 4 × screw eye OL 220 for vertical ceiling suspension

aluminium | W 3000 × H X × D 120 mm |



→ Please advise height 1000-3000 mm when placing the order.

₹ octalumina 120

Products

Light frame element

vertically suspended W 2000 × H X × D 120 mm



OL 1265-2000.01

1 × frame element made of M 1901 with bracing, for double sided back-lit graphics, LED modules (11500 lm, 100 W) and power supply unit 150 W mounted, incl. 1 × cable 2 m with Schuko plug and 3 × screw eye OL 220 for vertical ceiling suspension

aluminium | W 2000 × H X × D 120 mm |



7 Please advise height 1000-3000 mm when placing the order.

Light frame element

vertically suspended W 1000 × H X × D 120 mm



OL 1265-1000.01

1 × frame element made of M 1901 with bracing, for double sided back-lit graphics, LED modules (5500 lm, 48 W) and power supply unit 60 W mounted, incl. 1 × cable 2 m with Schuko plug and 2 × screw eye OL 220 for vertical ceiling suspension

aluminium | W 1000 × H X × D 120 mm |



7 Please advise height 1000-3000 mm when placing the order.

Light frame element

vertically suspended W 500 × H X × D 120 mm



OL 1265-500.01

1 × frame element made of M 1901 with bracing, for double sided back-lit graphics, LED modules (2500 lm, 22 W) and power supply unit 60 W mounted, incl. 1 × cable 2 m with Schuko plug and 2 × screw eye OL 220 for vertical ceiling suspension

aluminium | W 500 \times H X \times D 120 mm |



▶ Please advise height 1000-3000 mm when placing the order.

Light frame element


vertically suspended 120 mm, custom size



OL 1265-SO.01

 $1\times$ frame element made of M 1901 with bracing, for double sided back-lit graphics, LED modules and power supply unit mounted, incl. $1\times$ cable 2 m with Schuko plug and screw eye OL 220 for vertical ceiling suspension


aluminium | 120 mm, custom size |



Custom size: Please advise width 500-3000 and height 1000-3000 mm when placing the order.

Light frame element


Start / end element vertically suspended



OL 1265-E500.01

1 × end frame element made of M 1901 with bracing and end extrusion, for double sided back-lit graphics, LED modules (2500 lm, 22 W) and power supply unit 60 W mounted, incl. 1 × cable 2 m with Schuko plug and 2 × screw eye OL 220 for vertical ceiling suspension

aluminium | W 500 × H X × D 120 mm |



7 Please advise height 1000-3000 mm when placing the order.

对 octalumina 120

Products


Light frame element

90° Corner vertically suspended



OL 1265-W90.01


 $1\times$ corner frame element 90° made of M 1901 with bracing, for double sided back-lit graphics, LED modules (3000 lm, 26 W) and power supply unit 60 W mounted, incl. $1\times$ cable 2 m with Schuko plug and $2\times$ screw eye OL 220 for vertical ceiling suspension aluminium | W 500 \times H X \times D 500 mm |



7 Please advise height 1000-3000 mm when placing the order.


Light frame element

45° Corner vertically suspended



OL 1265-W45.01

 $1\times$ corner frame element 45° made of M 1901 with bracing, for double sided back-lit graphics, LED modules (3000 lm, 26 W) and power supply unit 60 W mounted, incl. $1\times$ cable 2 m with Schuko plug and $2\times$ screw eye OL 220 for vertical ceiling suspension aluminium | W 500 \times H X \times D 354 mm |



7 Please advise height 1000-3000 mm when placing the order.


Light frame element

60° Corner vertically suspended



OL 1265-W60.01

 $1\times$ corner frame element 60° made of M 1901 with bracing, for double sided back-lit graphics, LED modules (3000 lm, 26 W) and power supply unit 60 W mounted, incl. $1\times$ cable 2 m with Schuko plug and $2\times$ screw eye OL 220 for vertical ceiling suspension aluminium | W 500 \times H X \times D 433 mm |



▶ Please advise height 1000-3000 mm when placing the order.


Light frame element

135° Corner vertically suspended




OL 1265-W135.01

 $1\times$ corner frame element 135° made of M 1901 with bracing, for double sided back-lit graphics, LED modules (3000 lm, 26 W) and power supply unit 60 W mounted, incl. $1\times$ cable 2 m with Schuko plug and $2\times$ screw eye OL 220 for vertical ceiling suspension aluminium | W 500 \times H X \times D 438 mm |



7 Please advise height 1000-3000 mm when placing the order.

₹ octalumina 120

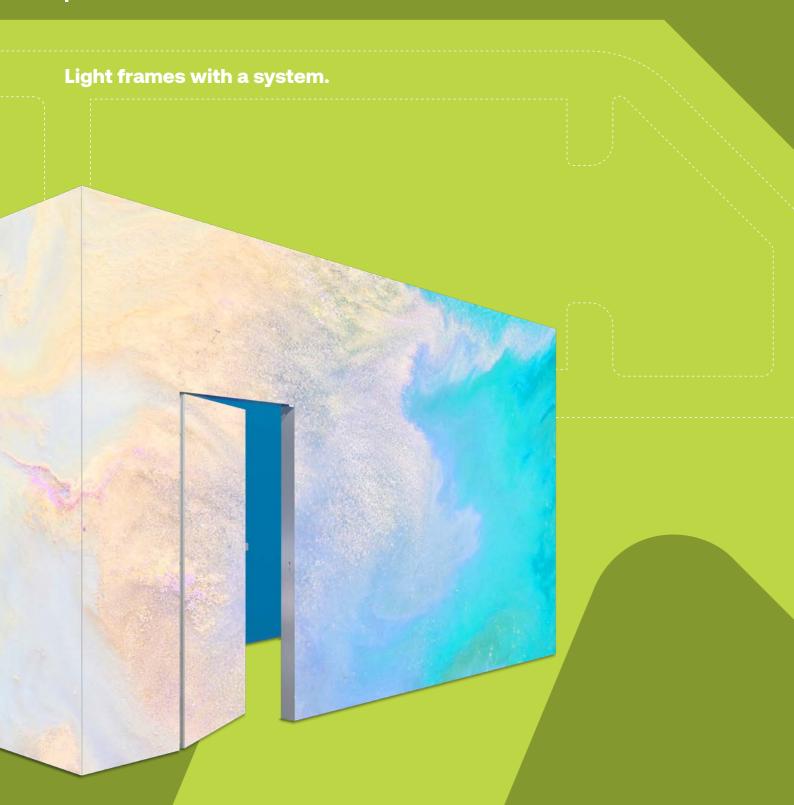

Index

TECHNICAL FEATURES	406
→ OVERVIEW	408
7 COMPONENTS	
7 Basic parts	410
Accessories	414
7 Doors	415
⊲ Electrical parts	416



Technical features



several fabric grooves



90° corner



invisible extrusion edges

1 extrusion. 2 fabric grooves on the front. 3 dimensions.

Fitted with another fabric groove, **octalumina plus** offers new possibilities. By playing with two layers and different fabrics, you can create impressive 3D effects.

Slanted groove. Without extrusion edges.

Visible frame edges are a thing of the past now. With the new extrusions, all edges are covered with fabric. Thanks to the new 30° inclined groove, the silicone edges are firmly tightened around the extrusion.

The solution for fabric corners.

octalumina plus completely focuses on the image. Even in corners. Graphics are only separated by a 2 mm thin extrusion edge in the corners for a virtually seamless picture.


Illuminated room. Illuminated door.

Build enclosed, freestanding rooms with **octalumina plus**. If desired, also add flush-mounted illuminated doors. Create an impressive ambiance that captivates the visitor and creates a lasting effect.

Overview



Overview

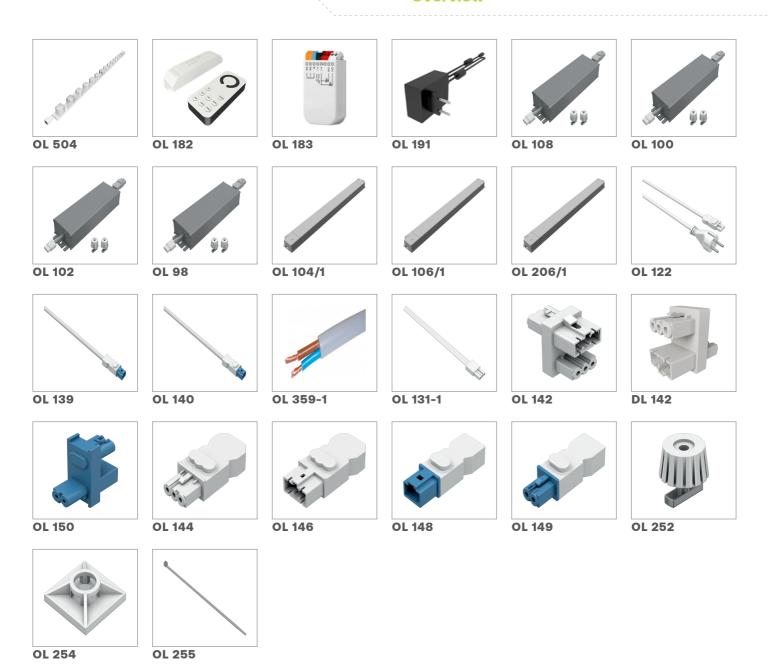

Basic parts

Tension fabric extr.


plus, 90° for several fabric layers




U 1060.01

plus, 90° , for several fabric layers to create a three-dimensional effect, slanted groove without visible profile edges, for illumination graphics with silicone edge M 1313

aluminium | L 6000 × W 120 × H 66 mm | 35.71 lbs





Tension fabric extr.


plus, 45° for several fabric layers




U 1063.01

plus, 45° , for several fabric layers to create a three-dimensional effect, slanted groove without visible profile edges, for the construction of 90° corners in connection with frame extrusion U 1060, for illumination graphics with silicone edge M 1313

aluminium | L 6000 × W 120 × H 73 mm | 47.414 lbs





Square extrusion


4 system grooves L 5000 × W 120 × H 120 mm




M 225.01

adaptors with tension lock M 1102 / M 1122, adaptors with safety tension lock M 1124 / M 1126, with 4 system grooves

aluminium | L 5000 \times W 120 \times H 120 mm | 43.664 lbs





Square extrusion


L 6000 × W 120 × H 120 mm 6000 mm long




M 226.01

adaptors with tension lock M 1102 / M 1122, adaptors with safety tension lock M 1124 / M 1126

aluminium | L 6000 \times W 120 \times H 120 mm | 50.062 lbs





Corner upright


90° without W 2850




M 253.01

 $1\times$ extrusion manufactured from 120 mm square extrusion M 225, without adjustable foot W 2850

aluminium | L 120 \times W 120 \times H 2480 mm | 21.094 lbs





■ Attention: without adjustable foot W 2850

Basic parts


Corner upright extrusion | M 260.01


90° corner, round L 6000 × W 120 × H 120 mm



for connecting extrusions with width 16, 40, 80, 120 mm, OCTAwall pro or OCTAwall 40 frames, fabric can be stretched over the

aluminium | L 6000 × W 120 × H 120 mm | 56.217 lbs





Fixing set


for OCTAlumina plus frames M6 × 40 mm




OL 2860.37

for connection of extrusions U 1060 / U 1063, 1 \times cylinder head screw M6 × 40, 8.8, DIN 912, 2 × washer A6,4 -140HV, DIN 125, 1 × hexagon nut M6, DIN 934

steel | M6 × 40 mm | 0.033 lbs






Fixing set

for OCTAlumina frames L 57 × W 30 × H 30 mm




W 835.37

to connect 2 × OCTAlumina frame with or without upright steel | L 57 × W 30 × H 30 mm | 0.073 lbs







Corner connector

90° lock chamber 16 × 12 mm




M 1965B.00

90°, for extrusions with 16 \times 12 mm tension lock chamber, with 2 \times E 111 countersunk screw and E 111/20

zinc die cast | L 55 × W 55 × H 16 mm | 0.112 lbs





Corner connector


90° lock chamber 21 × 12 mm




Z 990.00

 90° , for extrusions with 21×12 mm lock chamber, incl. $2 \times M10$ threads for adjustable foot C 440/F, incl. 2 \times hex-star screw E 111 and F 111/20

zinc die cast | L 96 × W 96 × H 12 mm | 0.309 lbs





Basic parts


Corner connector


90° for extrusion U 1060 / U 1063



Z 981.37

90°, for corner connection of extrusions U 1060 and U 1063, with 2 \times countersunk screw E 111/m (M6), with 21 \times 12 mm lock chamber steel | L 90 \times W 90 \times H 5 mm | 0.28 lbs





Corner connector


90°, left for extrusion U 1060 / U 1063




Z 982.00

90°, left, for corner connection of extrusions U 1060 and U 1063, with 2 \times countersunk screw E 111/m (M6)

steel | L 75 × W 73 × H 5 mm | 0.077 lbs





■ Insert in frame: lower left corner and upper right corner

Corner connector


90°, right for extrusion U 1060 / U 1063




Z 983.00

90°, right, for corner connection of extrusions U 1060 and U 1063, with 2 \times countersunk screw E 111/m (M6)

steel | L 75 \times W 73 \times H 5 mm | 0.077 lbs





■ Insert in frame: lower right corner and upper left corner

Internal connector


straight lock chamber 21 × 12 mm



OL 240.00

straight, for lateral connection of frame profiles with 21 $\!\times$ 12 mm lock chamber, incl. 2 $\!\times$ countersunk screws E 111/m (M6)

aluminium | L 180 \times W 21 \times H 12 mm | 0.267 lbs



Internal connector


straight



M 1967.00

straight, for lateral connection of M 1925 and M 1935 frame profiles with 16 \times 12 mm tension lock chamber, incl. 2 \times E 111/m (M6) countersunk screw


aluminium | L 180 × W 16 × H 12 mm | 0.207 lbs

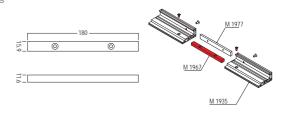

Basic parts

Tension fabric extr.


Bracing L 6000 × W 80 × H 16 mm



U 1066.85

bracing for seamless frames, for single sided illumination graphics with silicone edge M 1313, installation of Z 961/13 tension lock possible

aluminium | L 6000 × W 80 × H 16 mm | 18.197 lbs

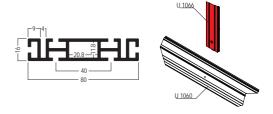

Beam extrusion


2 system grooves L 5000 × W 40 × H 16 mm



Z 4400.01

2 system grooves, tension lock Z 961/13 can be mounted, groove depth 7 mm $\,$

aluminium | L 5000 × W 40 × H 16 mm | 7.055 lbs



Internal connector


straight, toolless lock chamber 21 × 12 mm



Z 977.90

straight, toolless, for all beam extrusions with lock chamber 21 \times 12 mm and hole 13 mm dia., with push button setting for assembly without tools

aluminium | L 180 \times W 21 \times H 12 mm | 0.234 lbs



Tension lock


13 mm L 70 × W 21 × H 13 mm



Z 961/13.00

13 mm, for all beam extrusions with lock chamber 21 \times 12 mm as well as in conjunction with adaptor Z 161/A, for beam extrusions with lock chamber 39 \times 12 mm

zinc die cast/steel | L 70 × W 21 × H 13 mm | 0.115 lbs

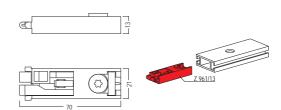

Accessories

Adjustable foot


M10 L 60 × W 60 × H 75 mm




W 2850.37

M10 thread, to adjust height of frames/extrusions from the top with hex-star T30

steel | L 60 × W 60 × H 75 mm | 0.249 lbs





End plate


for 80 mm extrusions for M 260




M 261.21

for Quarter-round extrusion M 260 in connection with 80 mm extrusions, to create top and bottom horizontal fabric groove, with drilling 11 mm dia. for adjustable foot

steel | L 120 \times W 120 \times H 6 mm | 0.739 lbs





End cap


for drill hole 8 mm dia. L 13 × W 13 × H 12 mm



M 1491.35

to cover drill holes with 8 mm dia., similar to RAL 7035 plastic, light grey | L 13 × W 13 × H 12 mm |






Screw eye


opening 20 mm dia. for ceiling suspension



OL 220.37

for vertical ceiling suspension, opening 20 mm dia., thread M8 steel | L 36 × W 36 × H 25 mm | 0.139 lbs





Universal retainer

for extrusions M 1915/M 1935



OL 234.37

ceilling suspension/wall mount | for single sided frames, for wall mounting and horizontal ceiling suspension, with eye bolt, can be used with M 1915 and M 1935 steel | L 95 \times W 35 \times H 35 mm | 0.375 lbs





after removing the eye bolt, can be used for wall mounting

Doors

Door

without illumination W 896 × H 1991 × D 80 mm




OL 895.90

door element, without illumination, DIN left or DIN right, opens outwards, incl.electronic door lock, RFID access control, incl. 10 \times chip card

aluminium | W 896 × H 1991 × D 80 mm | 30.313 lbs





- Attention: electronic door lock opens automatically in the event of a power cut!
- ▼ fabric dimensions = outer frame dimensions

Door

up to 3000 mm height for single sided illumination




OL 895A.90

door element, for walls up to 3000 mm height, incl. single sided illumination, DIN left or DIN right, opens outwards, incl.electronic door lock, RFID access control, incl. 10 \times chip card

aluminium | W 896 × H 1991 × D 80 mm | 32.055 lbs





- Attention: electronic door lock opens automatically in the event of a power cut!
- fabric dimensions = outer frame dimensions

Door

up to 5000 mm height for single sided illumination




OL 895B.90

door element, for walls up to 5000 mm height, incl. single sided illumination, DIN left or DIN right, opens outwards, incl.electronic door lock, RFID access control, incl. 10 \times chip card

aluminium | W 896 \times H 1991 \times D 80 mm | 32.364 lbs






- Attention: electronic door lock opens automatically in the event of a power cut!
- ▼ fabric dimensions = outer frame dimensions

Door frame

W 1046 × H 2066 × D 80 mm

OL 897.90

aluminium | W 1046 \times H 2066 \times D 80 mm | 22.641 lbs



Electrical parts


LED module

3 LEDs 768 lm / 6,48 W / 24 V



OL 323.90

3 LEDs per unit, 6.48 W / 24 V, 6500 K, 768 lumen, with wiring for connecting to the power supply unit, incl. 2 × fixing set OL 252 plastic/aluminium | L 240 × W 28 × H 15 mm | 0.128 lbs

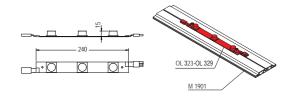


LED module

5 LEDs 1280 lm / 10,8 W / 24 V



OL 325.90

5 LEDs per unit, 10.80 W / 24 V, 6500 K, 1280 lumen, with wiring for connecting to the power supply unit, incl. 2 × fixing set OL 252 plastic/aluminium | L 400 × W 28 × H 15 mm | 0.185 lbs




LED module

7 LEDs 1792 lm / 15,12 W / 24 V



OL 327.90

7 LEDs per unit, 15,12 W / 24 V, 6500 K, 1792 lumen, with wiring for connecting to the power supply unit, incl. 2 × fixing set OL 252 aluminium/plastic | L 560 × W 28 × H 15 mm | 0.245 lbs

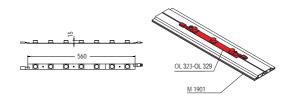


LED module

9 LEDs 2300 lm / 19,52 W / 24 V



OL 329.90

9 LEDs per unit, 19,52 W / 24 V, 6500 K, 2300 lumen, with wiring for connecting to the power supply unit, incl. 2 \times fixing set OL 252 aluminium/plastic | L 720 \times W 28 \times H 15 mm | 0.313 lbs

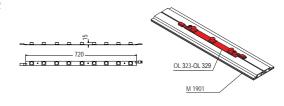

LED module


5 LEDs 1554 lm / 15 W / 24 V



OL 501.90

5 LEDs per unit, 15 W / 24 V, 6500 K, 1554 lm, Power-LED module 5 m $\,$

plastic | L 240 × W 24 × H 15 mm | 0.331 lbs



→ up to 5000 mm frame height

Electrical parts

LED module


8 LEDs 2552 lm / 24 W / 24 V



OL 502.90

8 LEDs per unit, 24 W / 24 V, 6500 K, 2552 lm, Power-LED module

plastic | L 400 × W 24 × H 15 mm | 0.282 lbs



7 up to 5000 mm frame height

LED module


11 LEDs 3540 lm / 33 W / 24 V



OL 503.90

11 LEDs per unit, 33 W / 24 V, 6500 K, 3540 lm, Power-LED Module


plastic | L 560 × W 24 × H 15 mm | 0.348 lbs



up to 5000 mm frame height

LED module


15 LEDs 4604 lm / 45 W / 24 V



OL 504.90

15 LEDs per unit, 45 W / 24 V, 6500 K, 4604 lm, Power-LED module 5 m

plastic | L 720 \times W 24 \times H 15 mm | 0.45 lbs



7 up to 5000 mm frame height

PWM Dimmer


for OL 323-329, OL 501-504 L 135 x W 30 x H 20 mm



OL 182.90

 $1 \times \text{control}$ unit and remote control for dimming of OCTANORM LED modules OL 323 - OL 329 and OL 501 - OL 504, Voltage AC 85 - 265 V, max. output current 10 A, max. output signal current 40 mA, output signal PWM 5 V Signal

plastic | L 135 \times W 30 \times H 20 mm | 0.227 lbs



noly in combination with OL 323-329, OL 501-504

Dimmer

Dali LED for OL 323 - OL 329



OL 183.90

Dali LED dimmer for OCTANORM LED modules OL 323 - OL 329, output can be controlled via DALI or SwitchDim2, input voltage from 12V to 48V DC, max. connection current 8A, PWM output

plastic | L 59 × W 33 × H 15 mm | 0.037 lbs



7 only in combination with OL 323 - OL 329

Electrical parts

Power supply

36 W for LEDs



OL 191.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 0.8 A, output: 24 V DC, 1.5 A, 36 W, cable length 1000 mm

plastic, black | L 79 × W 54 × H 33 mm | 0.461 lbs



OL 149 necessary, max. load only up to 29 W recommended for long life soan of the LED power supply unit

Power supply


60 W for LEDs



OL 108.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 0.64 A, Output: 24 V DC, 2,5 A, 60 W, plug connection at both ends, includes 2 \times OL 252 mounting set

aluminium/plastic | L 171 × W 62 × H 37 mm | 1.592 lbs

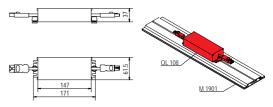

max. load only up to 48 W recommended for long life soan of the LED power supply unit

Power supply


100 W for LEDs




OL 100.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 1.1 A, output: 24 V DC, 4.16 A, 100 W, plug connection at both ends, includes 2 \times OL 252 mounting set

aluminium/plastic | L 200 × W 65 × H 39 mm | 2.03 lbs





max. load only up to 80 W recommended for long life soan of the LED power supply unit

Power supply


150 W



OL 102.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 1.7 A, output: 24 V DV, 6.3 A, 150 W, plug connection at both ends, includes 2 \times OL 252 mounting set


aluminium/plastic | L 228 × W 68 × H 39 mm | 2.588 lbs



max. load only up to 120 W recommended for long life span of the LED power supply unit

Power supply


240 W for LEDs



OL 98.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 4.0 A, output: 24 V DV, 10,0 A, 240 W, plug connection at both ends, includes $2\times$ OL 252 mounting set

aluminium/plastic | L 244 × W 68 × H 39 mm | 2.687 lbs



max. load only up to 192 W recommended for long life soan of the LED power supply unit

Electrical parts

Power supply


100 W (Slim Line) installation in frame



OL 104/1.90

for installation in OCTAlumina 40/80/120 frames, Input: 200-240 V AC, 50/60 Hz, 0.95 A, Output: 24 V DC, 4,17 A, 100 W

plastic | L 298 × W 30 × H 16.5 mm | 0.487 lbs




Power supply

150 W (Slim Line) installation in frame



OL 106/1.90

for installation in OCTAlumina 40/80/120 frames, input: 200-240 V AC, 50/60 Hz, 1.0 A, output: 24 V DC, 6.25 A, 150 W plastic \mid L 320 × W 30 × H 22 mm \mid 0.536 lbs



■ Only suitable for 230 volts! Not for USA and Canada!

Power supply

200 W (Slim Line) installation in frame



OL 206/1.90

for installation in OCTAlumina 40/80/120 frames, input: 200–240 V AC, 50/60 Hz, 1.6 A, output: 24 V DC, 8.33 A, 200 W plastic | L 360 \times W 30 \times H 23 mm | 0.95 lbs



■ Only suitable for 230 volts! Not for USA and Canada!

Power cable


for LED PSU 2000 mm long



OL 122.90

Mains connection cable, socket - SchuKo plug, 3 poles, rated voltage 250 V, rated current 16 A, cable type H05VV-F, conductor nominal cross-section 1.5 mm²

plastic, white | 2000 mm long | 0.611 lbs



for PSU OL 98 / OL 100 / OL 102 / OL 108

Connecting cable


external, 24V 1000 mm long



OL 139.30

for connecting a LED module to the power supply unit, if the distance between LED power supply and LED module is too big, incl. plug OL 148 on one side, $24\ V/10\ A$

plastic | 1000 mm long | 0.194 lbs



after cutting the cable to size the female plug OL 149 has to be mounted on the other side

Electrical parts

Connecting cable


external, 24V 3000 mm long



OL 140.30

for connecting a LED module to the power supply unit, if the distance between LED power supply and LED module is too big, incl. plug OL 148 on one side, 24 V/10 A $\,$

plastic | 3000 mm long | 0.553 lbs



after cutting the cable to size the female plug OL 149 has to be mounted on the other side


Connecting cable

2-wire 1000 mm long



OL 359-1.90

2 wire cable (brown, blue), PVC hose cable white plastic, white | 1000 mm long | 0.126 lbs



Extension cable

internal, 24 V 300 mm long



OL 131-1.90

24 V, for LED modules OL 3... and OL 5..., with plug for additional power source if series connection of LED modules exceeds 100 W, 24 V

plastic, white | 300 mm long | 0.033 lbs



Weitere Abmessungen:

OL 133-1.90

OL 135-1.90

OL 137-1.90

500 mm lang 1000 mm lang 3000 mm lang 0.037 lbs

0.084 lbs

0.243 lbs

After adjusting the cable length, the plug OL 148 has to be attached on the other side

Distributor block


250 V/16 A for 2 × PSU



OL 142.90

for connecting two power supply units OL 100 and/or OL 102 to the 2 m long power cable OL 122, 1 input / 2 output, 3 poles, 250 V/16 A

plastic, white | L 32 × W 22 × H 35 mm | 0.031 lbs



Electrical parts

Distributor block


250 V/16 A for 3 × PSU



DL 142.90

for connecting 3 power supply units to 2 m power cable OL 122, 1 input / 3 output, 3 poles, 250 V/16 A $\,$

plastic, white | L 36 × W 22 × H 33 mm | 0.035 lbs



Distributor block


24V / 16A for 2 × LED module



OL 150.30

to be used in combination with OL 123 / OL 125 / OL 127 / OL 129, 2 poles, 1 input / 2 output, 24V / 16A

plastic | L 35 × W 34 × H 16 mm | 0.013 lbs



Female connector


250V / 16A for DIY assembly



OL 144.30

for DIY assembly, 3 pole, with strain relief, use with power cable OL 122, 250V / 16A $\,$

plastic, white | L 53 \times W 23 \times H 14 mm | 0.018 lbs



Male plug


250V / 16A for DIY assembly



OL 146.30

for DIY assembly of OL 98 / OL 100 / OL 102 / OL 104 / OL 106 / OL 108 PSUs, 3-pole, with strain relief, 250V / 16A

plastic, white | L 53 × W 23 × H 14 mm | 0.055 lbs



Male plug


24V / 16A for DIY assembly



OL 148.90

for DIY assembly of 24 V OL 135-1 / OL 137-1 connection cable, 2-pole, with strain relief, 24V / 16A $\,$

plastic | L 53 \times W 18 \times H 14 mm | 0.018 lbs



Electrical parts

Female connector


24V / 16A for DIY assembly



OL 149.90

for DIY assembly of OL 98 / OL 100 / OL 102 / OL 104 / OL 106 / OL 108 power supply units, or 24 V OL 139 / OL 140 connection cable, 2-pole, with strain relief, 24V / 16A

plastic | L 53 × W 18 × H 14 mm | 0.018 lbs



Fixing set


for LEDs / PSU L 14 × W 14 × H 12 mm



OL 252.90

for mounting OL 123 / OL 125 / OL 127 / OL 129 LED modules and OL 98 / OL 102 / OL 108 power supply units on frame extrusion steel/plastic | L 14 \times W 14 \times H 12 mm | 0.009 lbs





Adhesive base


100 pcs for cable ties OL 255



OL 254.90

for wire management with wire ties OL 255 (not included), max. width wire ties 4 mm, packaging unit 100 pcs. $\,$

plastic, white | L 19 \times W 19 \times H 5 mm | 0.157 lbs



Cable tie


100 pcs L 155 × W 2.5 mm




OL 255.90

for wire management with fixing set for cable ties, packaging unit:

plastic, white | L 155 × W 2.5 mm | 0.112 lbs



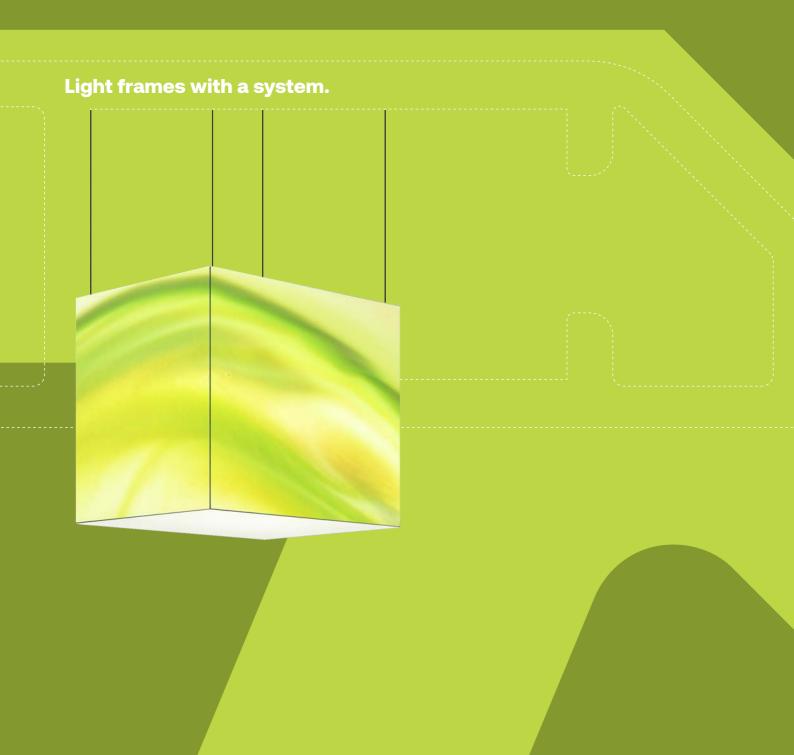


Index

7 TECHNICAL FEATURES	426
7 OVERVIEW	428
7 COMPONENTS	
7 Basic parts	430
Accessories Acces	433
↗ Electrical parts	434
7 Products	440



Technical features

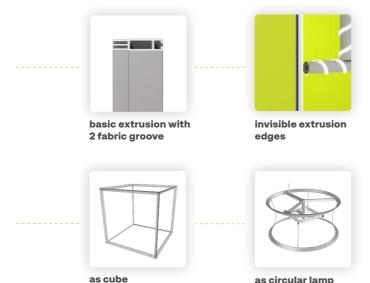

One extrusion. Two shapes.

Not only as a cube but also as a circular light fixture, **octalumina kubus** adds a real highlight. Due to its low weight, even large cubes can be easily suspended from the ceiling. Since each cube is individually customized, any edge length up to max. 2500 mm is freely selectable.

Any size perfectly illuminated.

The use of different illuminants ensures homogeneous brightness and illumination, regardless of the size. The high-quality LEDs offer a long service life, high radiance and are specially adapted to the light cubes.

Presentation area: visible from all sides.

The extrusion edge remains almost invisible thanks to the precise edge guide and the two fabric grooves on the basic extrusion. This gives the impression that the fabric motif goes around the entire light cube without interruption. The special feature: The bottom side can be used as additional advertising space or as a light ceiling when suspended.



different lamps

Overview




Overview


























OL C800

Basic parts

Tension fabric extr.


for corner solution for illumination




M 1504.01

for corner solution, for illumination, for graphics with silicone edge M 1313, suspendable

aluminium | L 6000 × W 47 × H 16 mm | 10.075 lbs





▶ Attention: maximum size of cube 2500 × 2500 × 2500 mm


Extrusion


also as illumination element L 5000 × W 36 × H 36 mm



M 1980.00

for illumination element manufacturing, LED strip OL 682 is stuck to the outer surfaces, Z 961/8 tension lock can be installed aluminium | L 5000 \times W 36 \times H 36 mm | 5.844 lbs





Attention: can only be used in connection with OL T50


Knuckle

for M 1504 L 96 × W 96 × H 96 mm



M 1535.31

for connection with tension fabric extrusion M 1504 plastic | L 96 \times W 96 \times H 96 mm | 0.123 lbs





Internal connector


straight lock chamber 21 × 12 mm




OL 240.00

straight, for lateral connection of frame profiles with 21 × 12 mm lock chamber, incl. 2 × countersunk screws E 111/m (M6)

aluminium | L 180 × W 21 × H 12 mm | 0.267 lbs





Beam extrusion


groove depth 7 mm L 5000 × W 50 × H 16 mm




Z 460.01 | .11

for installation of cube illumination, installation of Z 951/13 tension lock, groove depth 7 $\rm mm$

aluminium | L 5000 \times W 50 \times H 16 mm | 8.719 lbs





Basic parts

Adaptor


for single sided bracing for cube



M 1547.37

for single sided bracing, to install 16 mm bracing extrusion to cube extrusion M 1504, with 2 \times hammerhead screw M 1472

steel | L 16 × W 16 × H 95 mm | 0.216 lbs

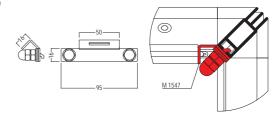

mount bracing only on the same side as illumination element, otherwise shadows may occur


Adaptor

for double sided bracing for cube



M 1545.37

for double sided bracing, to install 16 mm bracing extrusions to cube extrusion M 1504, with 2 \times M 1472 hammerhead screw steel | L 28 \times W 28 \times H 95 mm | 0.254 lbs





mount bracing only on the same side as illumination element, otherwise shadows may occur


Corner bracing


bottom for cube



M 1543.37

to stabilize the bottom corner when cube is used as table, integrated foot, with 3 × M 1472 hammerhead screw steel | L 50 × W 87 × H 79 mm | 0.492 lbs





Corner bracing


top for cube




M 1549.37

to stabilize the top corner when cube is used as table, integrated foot, with 3 \times M 1472 hammerhead screw

steel | L 50 \times W 87 \times H 54 mm | 0.317 lbs





Tension lock


8 mm L 70 × W 20 × H 12 mm




Z 961/8.00

8 mm, for all beam extrusions with cross- or T-lock chamber 21 \times 12 mm

zinc die cast/steel | L 70 \times W 20 \times H 12 mm | 0.119 lbs





Basic parts

Tension lock


key hole aperture lock chamber 21 × 12 mm



Z 951/13.00

13 mm, for all beam extrusions with lock chamber 21 × 12 mm and key hole aperture, L 70 × W 21 × H 12 mm

zinc die cast/steel | L 70 \times W 21 \times H 12 mm | 0.115 lbs

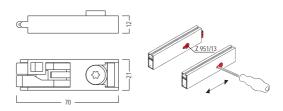

Accessories

Screw eye


max. 35 kg Opening 20 mm dia.



M 1233.37

for system groove 4.3 mm, opening 20 mm dia., consists of 1 \times hammer head screw (M8) M 1470/Ha and 1 \times eye nut (M8) M 1401/21

steel | L 36 × W 20 × H 36 mm | 0.134 lbs



max. load capacity 35 kg

Electrical parts

Illumination element


T-shape (3400 lm / 40 W) 5 sides illuminated



OL 670.90

T-shaped illumination element, made of extrusion M 1201, for 5-sided illumination of cubes with 1000 mm height, 6500 K, incl. LED bands and cable connection

aluminium | L 300 × W 50 × H 602 mm | 2.425 lbs





→ PSU and Z 460 extrusion not included

Illumination element

straight (3400 lm / 40 W) 4 sides illuminated



OL 675.90

Straight illumination element, made of extrusion M 1201, for 4-sided illumination of cubes with 1000 mm height, 6500 K, incl. LED bands and cable connection

aluminium | L 40 \times W 40 \times H 850 mm | 2.2 lbs





→ PSU and Z 460 extrusion not included


Diffusor screen

L 200 × W 1 × H 640 mm



for light dispersion if more than 1 lighting element OL $670\ /$ OL 675 is used

plastic | L 200 × W 1 × H 640 mm | 0.17 lbs




Diffusor screen

L 200 × W 1 × H 2140 mm

OL 655.90

for light dispersion if more than 1 lighting element OL 670 / OL 675 is used

plastic | L 200 \times W 1 \times H 2140 mm | 0.117 lbs



Illumination element


19780 lm / 12 W for cube bigger as 150 cm




OL 680.90

for cubes with edge lenghts bigger than 150 cm, complete with bulb fitting and connecting cable, voltage: 100-230 V AV, output: 120 W, IP64, 15600 lm, bulb fitting: E40

plastic | L 135 × W 140 × H 280 mm | 3.968 lbs





■ Attention: Only to be installed by expert staff

Electrical parts

LED strip


self-adhesive for M 1980



OL 682.90

for extrusion M 1980, on roll, voltage: 24V, light color: 5600 K, power: 4,8W/m, self-adhesive back

plastic | L 5000 × W 8 × H 2.2 mm | 0.24 lbs



LED strip can be cut to length in 100 mm steps


LED strip

elf-adhesive for M 1201



OL 685.90

for extrusion M 1201, on roll, voltage: 24V, light color: 6500 K, power: 24 W/m, luminous flux: 1700 lm/m, self-adhesive back plastic | L 5000 \times W 10 \times H 1.5 mm | 0.304 lbs



LED strip can be cut to length in 100 mm steps


Dimmer

Mini 12-24 V



OL 181.90

controller and remote Voltage: 12V-24V 6A Max, 144 W @ 24 V, 72 W @ 12V, 1 channel input open, output with LED connector plastic | L 67 \times W 31 \times H 10 mm | 0.317 lbs



■ only in combination with OL 303 - 312, OL 685, OL 682

Power supply


36 W



OL 191.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 0.8 A, output: 24 V DC, 1.5 A, 36 W, cable length 1000 mm

plastic, black | L 79 \times W 54 \times H 33 mm | 0.461 lbs



OL 149 necessary, max. load only up to 29 W recommended for long life soan of the LED power supply unit

Power supply


60 W for LEDs



OL 108.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 0.64 A, Output: 24 V DC, 2,5 A, 60 W, plug connection at both ends, includes 2 \times OL 252 mounting set

aluminium/plastic | L 171 × W 62 × H 37 mm | 1.592 lbs

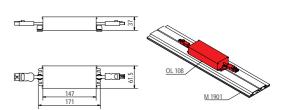

max. load only up to 48 W recommended for long life soan of the LED power supply unit

Electrical parts

Power supply


100 W for LEDs




OL 100.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 1:1 A, output: 24 V DC, 4:16 A, 100 W, plug connection at both ends, includes 2 \times OL 252 mounting set

aluminium/plastic | L 200 × W 65 × H 39 mm | 2.03 lbs





max. load only up to 80 W recommended for long life soan of the LED power supply unit

Power supply


150 W for LEDs



OL 102.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 1.7 A, output: 24 V DV, 6.3 A, 150 W, plug connection at both ends, includes 2 \times OL 252 mounting set

aluminium/plastic | L 228 × W 68 × H 39 mm | 2.588 lbs



max. load only up to 120 W recommended for long life span of the LED power supply unit

Power supply


240 W for LEDs



OL 98.90

for LEDs, input: 100-240 V AC, 50/60 Hz, 4.0 A, output: 24 V DV, 10,0 A, 240 W, plug connection at both ends, includes 2 \times OL 252 mounting set

aluminium/plastic | L 244 × W 68 × H 39 mm | 2.687 lbs



max. load only up to 192 W recommended for long life soan of the LED power supply unit

Power supply


100 W (Slim Line)



OL 104/1.90

for installation in OCTAlumina 40/80/120 frames, Input: 200-240 V AC, 50/60 Hz, 0.95 A, Output: 24 V DC, 4,17 A, 100 W

plastic | L 298 × W 30 × H 16.5 mm | 0.487 lbs



Power supply


150 W (Slim Line)



OL 106/1.90

for installation in OCTAlumina 40/80/120 frames, input: 200-240 V AC, 50/60 Hz, 1.0 A, output: 24 V DC, 6.25 A, 150 W

plastic | L 320 × W 30 × H 22 mm | 0.536 lbs



■ Only suitable for 230 volts! Not for USA and Canada!

Electrical parts

Power supply

200 W (Slim Line) installation in frame



OL 206/1.90

for installation in OCTAlumina 40/80/120 frames, input: 200-240 V AC, 50/60 Hz, 1.6 A, output: 24 V DC, 8.33 A, 200 W

plastic | L 360 × W 30 × H 23 mm | 0.95 lbs



Only suitable for 230 volts! Not for USA and Canada!

Power cable


for LED PSU 2000 mm long



OL 122,90

Mains connection cable, socket - SchuKo plug, 3 poles, rated voltage 250 V, rated current 16 A, cable type H05VV-F, conductor nominal cross-section 1.5 mm²

plastic, white | 2000 mm long | 0.611 lbs



7 for PSU OL 98 / OL 100 / OL 102 / OL 108

Connecting cable


external, 24V 1000 mm long



OL 139.30

for connecting a LED module to the power supply unit, if the distance between LED power supply and LED module is too big, incl. plug OL 148 on one side, $24\ V/10\ A$

plastic | 1000 mm long | 0.194 lbs



after cutting the cable to size the female plug OL 149 has to be mounted on the other side

Connecting cable


external, 24V 3000 mm long



OL 140.30

for connecting a LED module to the power supply unit, if the distance between LED power supply and LED module is too big, incl. plug OL 148 on one side, 24 V/10 A

plastic | 3000 mm long | 0.553 lbs



after cutting the cable to size the female plug OL 149 has to be mounted on the other side


Connecting cable

2-wire 1000 mm long



OL 359-1.90

2 wire cable (brown, blue), PVC hose cable white plastic, white \mid 1000 mm long \mid 0.126 lbs



Electrical parts

Distributor block


250 V/16 A for 2 × PSU



OL 142.90

for connecting two power supply units OL 100 and/or OL 102 to the 2 m long power cable OL 122, 1 input / 2 output, 3 poles, 250 V/16 A

plastic, white | L 32 × W 22 × H 35 mm | 0.031 lbs



Distributor block

250 V/16 A for 3 × PSU



DL 142.90

for connecting 3 power supply units to 2 m power cable OL 122, 1 input / 3 output, 3 poles, 250 V/16 A $\,$

plastic, white | L 36 × W 22 × H 33 mm | 0.035 lbs





Distributor block


24V / 16A for 2 × LED module



OL 150.30

to be used in combination with OL 123 / OL 125 / OL 127 / OL 129, 2 poles, 1 input / 2 output, 24V / 16A

plastic | L 35 \times W 34 \times H 16 mm | 0.013 lbs



Female connector


250V / 16A for DIY assembly



OL 144.30

for DIY assembly, 3 pole, with strain relief, use with power cable OL 122, 250V / 16A $\,$

plastic, white | L 53 \times W 23 \times H 14 mm | 0.018 lbs



Male plug


250V / 16A for DIY assembly



OL 146.30

for DIY assembly of OL 98 / OL 100 / OL 102 / OL 104 / OL 106 / OL 108 PSUs, 3-pole, with strain relief, 250V / 16A

plastic, white | L 53 \times W 23 \times H 14 mm | 0.055 lbs



Electrical parts

Male plug


24V / 16A for DIY assembly



OL 148.90

for DIY assembly of 24 V OL 135-1 / OL 137-1 connection cable, 2-pole, with strain relief, 24V / 16A $\,$

plastic | L 53 × W 18 × H 14 mm | 0.018 lbs



Female connector


24V / 16A for DIY assembly



OL 149.90

for DIY assembly of OL 98 / OL 100 / OL 102 / OL 104 / OL 106 / OL 108 power supply units, or 24 V OL 139 / OL 140 connection cable, 2-pole, with strain relief, 24V / 16A

plastic | L 53 × W 18 × H 14 mm | 0.018 lbs



Adhesive base


100 pcs for cable ties OL 255



OL 254.90

for wire management with wire ties OL 255 (not included), max. width wire ties 4 mm, packaging unit 100 pcs. $\,$

plastic, white | L 19 \times W 19 \times H 5 mm | 0.157 lbs



Cable tie


100 pcs L 155 × W 2.5 mm



OL 255.90

for wire management with fixing set for cable ties, packaging unit: 100 $\ensuremath{\mathsf{pcs}}$

plastic, white | L 155 × W 2.5 mm | 0.112 lbs



Products

Light cube


cube custom size



OL 690.90

cube solution for ceiling suspension (depending on size), optional with lighting element OL 675 (straight), OL 670 (T-shaped) or OL 680 (cone-shaped), up to 2500 mm edge length, Custom size: please specify dimensions in your order

aluminium | custom size |



▼ without fabric/graphics

Counter


illuminated W 900 × H 912 × D 440 mm



OL C800.31

incl. 2 × shelve, OCTAlumina front frame, 6500 K, fabric wing doors without illumination, pre-assembled LEDs and PSU, cable length 2 m, space-saving, foldable, easy assembly, outer frame dimensions front: W 900 × H 900 mm, outer frame dimensions side: W 440 × H 900 mm

aluminium | W 900 × H 912 × D 440 mm | 53.788 lbs



- ▼ without fabric/graphics
- ₹ fabric dimensions = outer frame dimensions + 5 mm

Bar table

illuminated L 570 × W 570 × H 1031 mm



OL T50.90

bar table with 4 illuminated sides, corners with no visible edges, with tabletop, Power: 19W, Power adapter: OL 191, Light color: 5600K, outer frame dimension: W 498 \times H 998 mm

aluminium | L 570 \times W 570 \times H 1031 mm | 31.171 lbs



- → without fabric/graphics
- ▼ fabric dimension = outer frame dimension

Circular lamp

1000 mm dia. for seamless graphics



OL 440.01

 $1\times$ ceiling lamp, for seamless graphics, LED modules and LED power supply unit mounted (6500 K, 9860 lm, 140 W), incl. cable with Schuko plug

aluminium | L 1000 × W 1000 × H 500 mm | 24.251 lbs



▼ without fabric/graphics

Circular lamp


2000 mm dia. for seamless graphics



OL 450.01

 $1\times$ ceiling lamp, for seamless graphics, LED modules and LED power supply unit mounted (6500 K, 16320 lm, 230 W), incl. cable with Schuko plug

aluminium | L 2000 × W 2000 × H 500 mm | 46.297 lbs



! 7 without fabric/graphics

Products

Circular lamp

3000 mm dia. for seamless graphics



OL 460.01

 $1\times$ ceiling lamp, for seamless graphics, LED modules and LED power supply unit mounted (6500 K, 40800 lm, 576 W), incl. cable with Schuko plug

aluminium | L 3000 × W 3000 × H 500 mm | 81.57 lbs




ywithout fabric/graphics

7 Double deck system

Overview



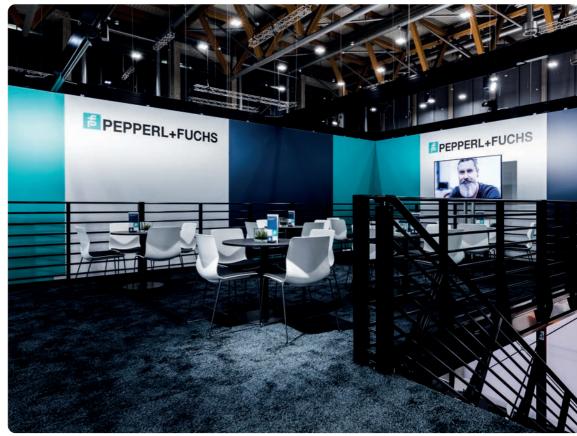

7 Double deck system

Overview







octamax Double deck



Index

→ TECHNICAL FEATURES	446
→ OVERVIEW	448
→ COMPONENTS	
→ Podest	452
	456
¬ Railing	459
→ Handrail →	463
¬ Tools	467
¬ Basic modules 3 × 4	468
¬ Basic modules 4 × 4	476
▼ Extension modules	481







Technical features



light weight



reusable



fast installation



without lifting tools



basic modules



staircase

More booth space. For your products.

At a height of 2.75 m, additional booth space opens up. Ideal for undisturbed conference rooms or other product presentations with a long-distance impact. More attention. More advertising space. And all this at reduced basic costs.

Versatile and sustainable.

Numerous combinations of basic and extension modules offer the right solution for every project. From small to large, together or separate. The main highlight is that the modules can be rearranged again and again – sustainably.

Double deck without lifting tools? Of course!


Save additional time and costs. The light aluminium material allows for easy and, above all, fast assembly and disassembly. The individual modules can be mounted without any additional lifting equipment.

Handrail. Staircase. Perfectly harmonized.

A system where everything fits together. From hand-rail extrusion to staircase and platform. If that is not enough, **octamax** can also be combined with **maxima** and all other **octanorm** systems. More individuality. More attraction!



multiple variations



more stand space

Overview



DFL 421

DFL 568

DFL 423

DFL 424

DFL 431

Overview



Overview






















DFL 383PLM











DFL 646PL



DFL 744PL

DFL 644PL



DFL 744PLM

DFL 747PL



DFL 747PR



DFL 474L















DFL 477L



DFL 474LM

DFL 474RM

DFL 444L

DFL 444R













DFL 844L









DFL 474PLM

DFL 474PRM

DFL 477PL

DFL 848L

DFL 477PR

Overview





DFL 844PL



DFL 844PR



DFL 848PL



DFL 848PR

Extension modules









Podest

Upright extrusion


4 system grooves L 5040 × W 80 × H 80 mm




DFS 84.01

as upright, upright extension and upright pylon extension, with 4 system grooves $\,$

aluminium | L 5040 × W 80 × H 80 mm | 85.869 lbs





Square extrusion


4 system grooves L 6000 × W 80 × H 80 mm



U 1020.09

4 system grooves

aluminium | L 6000 \times W 80 \times H 80 mm | 34.16 lbs



Floor panel

M8 for DFS 84 / DFL 150




DFL 180.37

for upright DFS 84 / DFL 150, for centre, edge or corner setup, with 6 × drill hole for countersunk screw M8, incl. 4 × contersunk screw M8 × 25 DFL 180/20

steel | L 200 × W 200 × H 8 mm | 5.575 lbs





Connector


for DFL 150/DFL 421/DFL 423 L 80 × W 80 × H 230 mm




DFL 100.01

for fixing to upright extrusion DFL 150 and for mounting of railing posts DFL 421 / DFL 423, for mounting beams in 4 directions, incl. $8\times$ screw M8

aluminium | L 80 × W 80 × H 230 mm | 4.894 lbs





Podest

Supporting beam


1 axis L 910 × W 80 × H 230 mm



DFL 230/910.00

1 axis, 1 × extrusion cutting made of DFL 230, complete with 2 × beam adaptor DFL 211, cut to size, incl. fixing screws, with 2 × drill hole 60 mm dia. for cables

aluminium | L 910 \times W 80 \times H 230 mm | 17.868 lbs

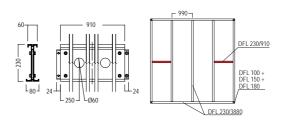

Weitere Abmessungen:

DFL 230/1900.00 DFL 230/2890.00 DFL 230/3880.00 L 1900 × B 80 × H 230 mm 31.879 lbs L 2890 × B 80 × H 230 mm 48.501 lbs

L 3880 × B 80 × H 230 mm 65.036 lbs

■ Attention: use only the screws supplied


Supporting beam


pedestal L 1200 × W 80 × H 230 mm



DFL 576.00

1 × extrusion cutting made of DFL 230, for pedestal, complete with 2 × beam adaptor DFL 211, cut to size, incl. fixing screws aluminium | L 1200 × W 80 × H 230 mm | 16.856 lbs





■ Attention: use only the bolts supplied

Supporting beam


pedestal L 1405 × W 80 × H 230 mm




DFL 577.00

1 × extrusion cutting made of DFL 230, for pedestal, complete with 2 × beam adaptor DFL 211, cut to size, incl. fixing screws

aluminium | L 1405 × W 80 × H 230 mm | 27.297 lbs





■ Attention: use only the bolts supplied

Beam adaptor


for DFL 230/DFL 100/DFL 200 L 100 × W 10 × H 182 mm




DFL 211.00

to insert in DFL 230/... and to mount at the connector head DFL 100, or at the beam adaptor 90° DFL 200, with 4 \times drill hole 11 mm dia. and incl. screw accessories

aluminium | L 100 × W 10 × H 182 mm | 0.996 lbs





■ Attention: use only the screws supplied

Podest

Beam adaptor


for DFL 230 / DFL 502 90°




DFL 200.37

90°, for mounting of intermediate beams DFL 230/... or stair stringer DFL 502 to supporting beam DFL 230/... can be retrofitted, with 2 × thread M10 and 2 × set screw M8 DFL 200/20

steel | L 207 × W 80 × H 29 mm | 1.316 lbs





Attention: must be ordered if supporting beam is mounted between suporting beam

Internal connector


for uprights / beams parallel



DFL 580.37

required for parallel positioned uprights or beams, inc. 2 \times hammerhead screw M 1471

steel | L 105 × W 25 × H 4 mm | 0.176 lbs





Panel retainer


with drill hole 4.5 mm dia. L 24 × W 25 × H 17 mm



E 221.38

with drill hole 4.5 mm dia. steel | L 24 \times W 25 \times H 17 mm | 0.029 lbs





Fixed wall unit


L 990 × W 80 × H 2518 mm



DFL 340.01

consisting of: 1 × upright extrusion M 1018/2510 mm with 2 × tension lock Z 961/8, top 1 × floor panel DFL 340/5, 1 × top pressure tie M 1025/910 mm with 2 × tension lock Z 961/8

aluminium/steel | L 990 × W 80 × H 2518 mm | 25.324 lbs



Fixed wall unit


L 1280 × W 80 × H 2518 mm




DFL 342.01

consisting of: 1 × upright M 1018/2510 mm with 2 × tension lock Z 961/8 top, 1 × floor panel DFL 340/5, 1 × top pressure tie M 1025/1200 mm with 2 × tension locks Z 961/8

aluminium/steel | L 1280 × W 80 × H 2518 mm | 24.758 lbs






▼ will be used in conjunction with stairs

7 octamax

Podest


Fixing set

for DFL 150 / DFL 331 L 100 × W 30 × H 32 mm



DFL 310.37

for mounting to upright extrusion DFL 150 and for fixing the vertical cross bracing DFL 331, incl. 2 × screw M8 DFL 310/20 steel | L 100 × W 30 × H 32 mm | 0.481 lbs

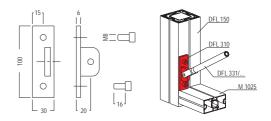


Internal connector


for DFL 331 L 80 × W 80 × H 8 mm



DFL 320.37

for connection of up to 4 vertical cross bracings DFL 331 steel | L 80 \times W 80 \times H 8 mm | 0.518 lbs





Staircase

Stair stringer


Set - 14 treads L 4910 × W 130 × H 230 mm



DFL 501.00

35°, set is intended for assembling a staircase, consisting of: 1 \times stair stringer set DFL 502, 1 \times Stair stringer infill DFL 504, permitted live load 5,0 kN/m2 in connection with stair treads DFL 533

aluminium/steel | L 4910 × W 130 × H 230 mm |

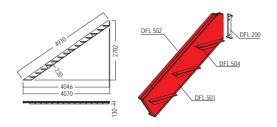

■ Attention: treads are not included!

Stair stringer


L 4910 × W 80 × H 230 mm



DFL 502.00

35°, consisting of: 2 × stair stringer DFL 505, 2 × beam connector for stair stringer DFL 512, 2 × foot plate DFL 510

aluminium/steel | L 4910 × W 80 × H 230 mm | 171.716 lbs

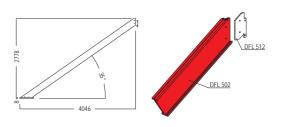

■ Attention: stair stringer infills DFL 503 not included

Infill


infill for DFL 502 bottom



DFL 545.00

infill bottom, to insert into stair stringer DFL 502, consisting of: 1 \times stair stringer infill DFL 545-L (bottom), 1 × stair stringer infill DFL 545-R (bottom), flame retardant B - s2 d0

wood | L 1260 × W 221 × H 27 mm |

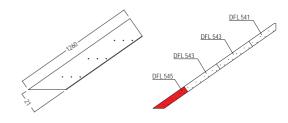

Infill


infill for DFL 502



DFL 543.00

infill center, to insert into stair stringer DFL 502, consisting of: 1 \times stair stringer infill DFL 543-L (middle), 1 × stair stringer infill DFL 543-R (middle), flame retardant B - s2 d0

wood | L 1290 × W 221 × H 27 mm |

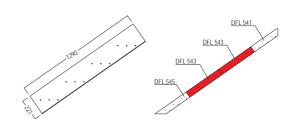


Infill

infill for DFL 502 top



infill top, to insert into stair stringer DFL 502, consisting of: $1 \times \text{stair}$ stringer infill DFL 541-L (top), 1 × stair stringer infill DFL 541-R (top), flame retardant B - s2 d0

wood | L 1057 × W 221 × H 27 mm |

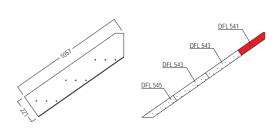

7 octamax

Staircase


Tread support

L 276 × W 50 × H 50 mm



DFL 520.37

incl. fixing screws steel | L 276 \times W 50 \times H 50 mm | 1.329 lbs

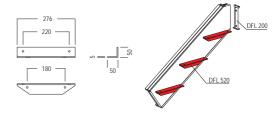

Step


L 1200 × W 310 × H 40 mm



DFL 533.00

with 4 \times threaded bushing M8 / steel and 4 \times fixing screw M8, flame retardant B – s2 d0

wood | L 1200 × W 310 × H 40 mm | 15.977 lbs






Floor panel

for stair stringer L 420 × W 80 × H 38 mm



DFL 510.37

for stair stringer, incl. fixing screw set steel | L 420 \times W 80 \times H 38 mm | 4.998 lbs






Mounting connector


for stair stringer L 130 × W 10 × H 240 mm



DFL 512.37

for mounting of a stair stringer DFL 502 to connect head DFL 100 or to beam connector 90° DFL 200, incl. fixing screw set steel | L 130 \times W 10 \times H 240 mm | 4.694 lbs





Staircase landing


set 1200 × 1485 × 2748 mm




DFL 562.00

set, comprised: 2 × upright extrusion DFL 150, 2 × base plate DFL 180, 2 × connector head DFL 100, 2 × supporting beam DFL 576, 2 × supporting beam DFL 577, 3 × beam connector DFL 200

aluminium/steel | 1200 × 1485 × 2748 mm | 202.753 lbs





7 octamax

Staircase

Supporting beam


pedestal L 1200 × W 80 × H 230 mm



DFL 576.00

1 × extrusion cutting made of DFL 230, for pedestal, complete with 2 × beam adaptor DFL 211, cut to size, incl. fixing screws

aluminium | L 1200 × W 80 × H 230 mm | 16.856 lbs

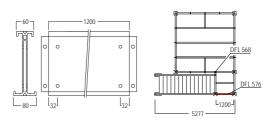

■ Attention: use only the bolts supplied


Supporting beam


pedestal L 1405 × W 80 × H 230 mm



DFL 577.00

1 × extrusion cutting made of DFL 230, for pedestal, complete with 2 × beam adaptor DFL 211, cut to size, incl. fixing screws aluminium | L 1405 × W 80 × H 230 mm | 27.297 lbs





■ Attention: use only the bolts supplied

Cover extrusion

for panel 4 mm L 6000 × W 22 × H 7 mm




M 1844.35

for 4 mm panels

plastic, semi-hard | L 6000 \times W 22 \times H 7 mm | 0.926 lbs





Cover extrusion

for panel 6 mm L 6000 × W 22 × H 9 mm




M 1846.35

for 6 mm panels

plastic, semi-hard | L 6000 × W 22 × H 9 mm | 1.124 lbs





Railing

Rectangular extrusion


L 6000 × W 60 × H 40 mm 6000 mm long



M 1082.01

tension lock Z 961/8 can be mounted in 2 positions, 6000 mm long

aluminium | L 6000 × W 60 × H 40 mm | 23.66 lbs



Beam extrusion

L 5000 × W 32 × H 16 mm 5000 mm long



Z 303.01

aluminium | L 5000 \times W 32 \times H 16 mm | 5.952 lbs



Railing post


center L 60 × W 40 × H 1157 mm




DFL 415.01

for center of pedestal, made of extrusion M 1082, incl. 2 \times tension lock Z 961/8

aluminium | L 60 \times W 40 \times H 1157 mm | 4.848 lbs





DFL 418

■ Attention: use only with railing post support DFL 430

Railing post


staircase L 60 × W 40 × H 893 mm



DFL 418.01

for staircase, made of extrusion M 1082, incl. 2 \times tension lock Z 961/8

aluminium | L 60 \times W 40 \times H 893 mm | 3.613 lbs



■ Attention: use only with railing post support DFL 430

Railing post

90° corner L 80 × W 80 × H 1188 mm




DFL 421.01

corner, with 4 \times thread M8 (bottom) and 1 \times end cap DFL 448 (top),

aluminium | L 80 \times W 80 \times H 1188 mm | 21.568 lbs





Railing

Railing post


staircase landing L 80 × W 80 × H 1188 mm




DFL 568.01

for staircase landing, with 1 \times tension lock adaptor M 1101 and 1 \times end cap M 1034

aluminium | L 80 × W 80 × H 1188 mm | 7.024 lbs





Railing post

staircase connection outside




DFL 423.01

outside, for mounting handrail connector DFL 462, outer connection, incl. $8 \times \text{thread M8}$

aluminium | L 80 × W 80 × H 1112 mm | 19.471 lbs






Railing post


staircase connection inside



DFL 424.01

inside, for fixing handrail connector DFL 464 / DFL 466 , with 1 \times tension lock adaptor M 1101 (bottom) and 4 \times thread M8 (top) aluminium | L 80 \times W 80 \times H 1112 mm | 6.885 lbs





Railing post support


for DFL 230 L 90 × W 60 × H 716 mm



can be retrofitted into beam DFL 230/... to achieve the required horizontal load bearing capacity of the handrail at the balustrade of 1,00 kN/m, incl. 2 \times fixing screw DFL 430/20, 2 \times fixing screw DFL 430/21

steel | L 90 × W 60 × H 716 mm | 5.93 lbs






Railing post support


for DFL 100 L 108 × W 9 × H 716 mm

DFL 431.21

for mounting to connector head DFL 100 to achieve the required horizontal load bearing capacity of the handrail at the balustrade of 1,00 kN/m, incl. fixing screws DFL 512/20

steel | L 108 \times W 9 \times H 716 mm | 4.83 lbs





Railing

End cap


for extrusions 80 × 80 mm L 80 × W 80 × H 3 mm




M 1034.35

for extrusions 80 \times 80 mm, for square extrusions M 1018 /M 1020 and lighttrack mounting extrusion M 1059

plastic, light grey | L 80 × W 80 × H 3 mm | 0.046 lbs






End cap

for DFL 421 L 80.3 × W 80.3 × H 3 mm



DFL 448.35

for railing post DFL 421, with 2 \times countersunk screw M5 M 1611/20 plastic | L 80.3 \times W 80.3 \times H 3 mm | 0.06 lbs






Beam

L 640 × W 16 × H 32 mm



made of beam extrusion Z 308, incl. 2 \times tension lock Z 961/13 aluminium | L 640 \times W 16 \times H 32 mm | 0.924 lbs

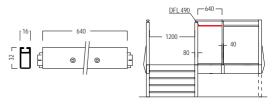

Weitere Abmessungen:

DFL 492.01

DFL 493.01

DFL 495.01

DFL 496.01

L 682,5 × B 16 × H 32 mm 1.043 lbs L 930 × B 16 × H 32 mm 1.246 lbs L 950 × B 16 × H 32 mm 1.259 lbs L 1200 × B 16 × H 32 mm 1.541 lbs

Glass retainer


for glass 12 mm L 45 × W 27.5 × H 63 mm



M 1467.39

for mounting to system groove 4.3 mm, for glass thickness 12 mm, with 1 \times hammerhead screw M 1470/Ha (M8)

zinc die cast | L 45 \times W 27.5 \times H 63 mm | 0.584 lbs

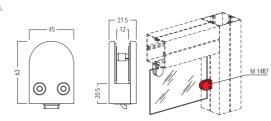

Railing

Cover extrusion


for panel 4 mm L 6000 × W 22 × H 7 mm



M 1844.35

for 4 mm panels plastic, semi-hard | L 6000 \times W 22 \times H 7 mm | 0.926 lbs





Cover extrusion


for panel 6 mm L 6000 × W 22 × H 9 mm



M 1846.35

for 6 mm panels plastic, semi-hard | L 6000 \times W 22 \times H 9 mm | 1.124 lbs






Handrail

Handrail extrusion

1 axis L 910 × W 76 × H 31 mm

DFL 401.01

1 axes, with 2 × hammerhead bolt M 1145 aluminium | L 910 × W 76 × H 31 mm | 2.361 lbs



DFL 401

- 80

Weitere Abmessungen:

DFL 402.01

DFL 403.01

DFL 404.01

L 1900 × B 76 × H 31 mm 5.004 lbs L 2890 × B 76 × H 31 mm 7.919 lbs L 3880 × B 76 × H 31 mm 10.527 lbs


Handrail extrusion

for DFL 464/N / DFL 466/N L 590 × W 76 × H 31 mm



DFL 481.01

for handrail connector DFL 464/N /DFL 466/N, with 1 × hammerhead bolt M 1145/Ha and 2 × set screw E 111/6×6 (M6) aluminium | L 590 × W 76 × H 31 mm | 1.493 lbs

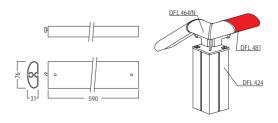

Weitere Abmessungen:

DFL 482.01

DFL 483.01

L 1580 × B 76 × H 31 mm L 2570 × B 76 × H 31 mm

3.999 lbs 6.504 lbs


Handrail extrusion

for DFL 464/N / DFL 466/N L 95 × W 76 × H 31 mm



DFL 427.01

for handrail connector DFL 464/N / DFL 466/N, with 1 × hammerhead bolt M 1145/Ha and 2 × set screw E 111/6×6 (M6) aluminium | L 95 × W 76 × H 31 mm | 0.269 lbs

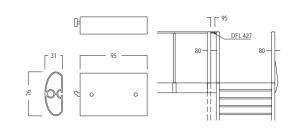


Handrail

Handrail extrusion

for DFL 464/N / DFL 466/N L 2860 × W 76 × H 31 mm

DFL 456.01

for handrail connector DFL 464/N / DFL 466/N, with 1 × hammerhead bolt M 1145/Ha and 2 × set screw E 111/6×6 (M6) aluminium | L 2860 × W 76 × H 31 mm | 7.238 lbs

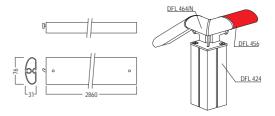


Handrail extrusion

for DFL 464/N / DFL 466/N L 3850 × W 76 × H 31 mm

DFL 457.01

for handrail connector DFL 464/N / DFL 466/N, with 1 × hammerhead bolt M 1145/Ha and 2 × set screw E 111/6×6 (M6) aluminium | L 3850 × W 76 × H 31 mm | 9.744 lbs

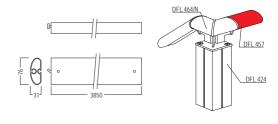


Handrail extrusion

for DFL 562 L 1405 × W 76 × H 31 mm

DFL 426.01

for staircase landing DFL 562, with 2 × hammerhead bolt M 1145 aluminium | L 1405 × W 76 × H 31 mm | 3.556 lbs

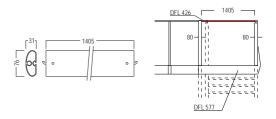

Weitere Abmessungen:

DFL 429.01

L 2600 × B 76 × H 31 mm 6.581 lbs

■ Attention: only for stair landing DFL 562

Handrail


Handrail extrusion

for DFL 462 / DFL 562 L 1315 × W 76 × H 31 mm

DFL 440.01

one-side 17.5° mitered for handrail connector DFL 462 and for stair landing DFL 562, with 1 \times hammerhead bolt M 1145

aluminium | L 1315 \times W 76 \times H 31 mm | 3.329 lbs

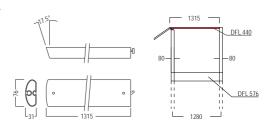

Weitere Abmessungen:

DFL 442.01

DFL 443.01

DFL 444.01

L 2015 × B 76 × H 31 mm L 3005 × B 76 × H 31 mm L 3995 × B 76 × H 31 mm 5.11 lbs 7.718 lbs 10.324 lbs


■ Attention: only for stair landing DFL 562


Handrail extrusion

for DFL 435 stair "end piece"

DFL 470.01

end piece, to be used with handrail extrusion DFL 435 at the bottom, with 1 × end plate DFL 410 and 1 × clamping screw M6 steel/aluminium | L 76 × W 31 × H 120 mm | 0.728 lbs





Handrail connector


straight L 90 × W 82 × H 77 mm




DFL 462.21

straight, to be used with staircase (top), with 2 \times fixing screw M8 DFL424/20

steel | L 90 \times W 82 \times H 77 mm | 1.208 lbs





Handrail connector


corner, left -17.5° & 0°



DFL 464/N.21

corner, left, with connection –17.5° & 0°, to be used with staircase, with 2 × fixing screw M8 DFL 424–20

steel | L 121.2 \times W 111 \times H 76.1 mm | 2.474 lbs





Handrail

Handrail connector


corner, right -17.5° & 0°



DFL 466/N.21

corner, right, with connection –17.5° $\&~0^\circ,$ to be used with staircase, with 2 × fixing screw M8 DFL 424–20

steel | L 121.2 × W 111 × H 76.1 mm | 2.482 lbs





End plate


for DFL 470 L 76 × W 31 × H 15 mm




DFL 410.21

for handrail extrusion "end piece" DFL 470, with 1 \times clamping screw M4

steel | L 76 × W 31 × H 15 mm | 0.121 lbs





Tools

Hexagon wrench


A/F 7 190 mm long



DFL 590.90

A/F 7

steel | 190 mm long | 0.159 lbs

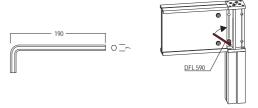


Ratchet

7 mm 3/8" 193 mm long



DFL 592.90

incl. screwdriver bit 7 mm 3/8" plastic/steel | 193 mm long | 0.661 lbs

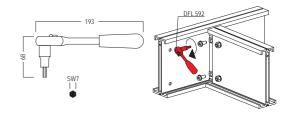

Basic modules 3 × 4

Basic Module

3 × 4 stair left



DFL 344L.90

1 × basic module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 7168 × H 3936 × D 4186 mm | 1071.799 lbs



Basic Module

3 × 4 stair right



DFL 344R.90

 $1\times$ basic module 3×4 , including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 7168 × H 3936 × D 4186 mm | 1071.791 lbs



Basic Module


3 × 4 stair left



DFL 343L.90

 $1\times$ basic module 3×4 , including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 3196 × H 3936 × D 8158 mm | 1071.901 lbs



Basic Module

3 × 4 stair right



DFL 343R.90

1 × basic module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 3196 × H 3936 × D 8158 mm | 1071.892 lbs



Basic Module


3 × 4, stair left and extension module 3 × 4



DFL 384L.90

1 × basic module 3 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 7168 × H 3936 × D 8146 mm | 1608.783 lbs



Basic modules 3 × 4

Basic Module


3 × 4, stair right and extension modul 3 × 4



DFL 384R.90

1 × basic module 3 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 7168 × H 3936 × D 8146 mm | 1608.774 lbs



Basic Module

3 × 4, stair left and extension module 3 × 4



DFL 383L.90

1 × basic module 3 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 3196 × H 3936 × D 12119 mm | 1608.884 lbs



Basic Module

3 × 4, stair right and extension module 3 × 4



DFL 383R.90

1 × basic module 3 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 3196 × H 3936 × D 12119 mm | 1608.875 lbs



Basic Module

3 × 4, stair left and extension module 3 × 4



DFL 644L.90

1 × basic module 3 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 10138 × H 3936 × D 4186 mm | 1519.439 lbs



Basic Module

3 × 4, stair right and extension module 3 × 4



DFL 644R.90

1 × basic module 3 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 10138 × H 3936 × D 4186 mm | 1519.43 lbs



Basic modules 3 × 4

Basic Module


3 × 4, stair left and extension module 3 × 4



DFL 646L.90

1 × basic module 3 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 6166 x H 3936 x D 8158 mm | 1519.54 lbs



Basic Module


3 × 4, stair right and extension module 3 × 4



DFL 646R.90

1 × basic module 3 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 6166 x H 3936 x D 8158 mm | 1519.532 lbs



Basic Module

3 × 4, stair left and extension modul 4 × 4



DFL 744L.90

 $1\times$ basic module 3×4 and extension module 4×4 , including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 11128 \times H 3936 \times D 4186 mm | 1650.075 lbs



Basic Module

3 × 4, stair right and extension module 4 × 4



DFL 744R.90

1 × basic module 3 × 4 and extension module 4 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W tt128 × H 3936 × D 4186 mm | 1652.548 lbs



Basic Module


3 × 4, stair left and extension modul 4 × 4



DFL 747L.90

1 × basic module 3 × 4 and extension module 4 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 7156 × H 3936 × D 8158 mm | 1652.659 lbs



Basic modules 3 × 4

Basic Module


3 × 4, stair right and extension module 4 × 4



DFL 747R.90

1 × basic module 3 × 4 and extension module 4 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 7156 × H 3936 × D 8158 mm | 1652.65 lbs



Basic Module


3 × 4, stair left and extension modul 4 × 4



DFL 743L.90

1 × basic module 3 × 4 and extension module 4 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 7156 x H 3936 x D 8158 mm | 1647.661 lbs



Basic Module


3 × 4, stair right and extension modul 4 × 4



DFL 743R.90

1 × basic module 3 × 4 and extension module 4 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 7156 × H 3936 × D 8158 mm | 1647.661 lbs



Basic Module


3 × 4 staircase landing



DFL 344PL.90

1 × basic module 3 × 4, including Staircase landing, railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 5478 × H 3936 × D 5671 mm | 1355.106 lbs



Basic Module

3 × 4 staircase landing



DFL 344PR.90

1 × basic module 3 × 4, including Staircase landing, railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 5478 × H 3936 × D 5671 mm | 1354.802 lbs



Basic modules 3 × 4

Basic Module

3 × 4 staircase landing



DFL 343PL.90

1 × basic module 3 × 4, including Staircase landing, railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 5466 × H 3936 × D 4667 mm | 1354.709 lbs



Basic Module

3 × 4 staircase landing



DFL 343PR.90

1 × basic module 3 × 4, including Staircase landing, railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 5466 × H 3936 × D 4667 mm | 1354.996 lbs



Basic Module


3 × 4, staircase landing and extension module 3 × 4



DFL 388PL.90

 $1\times$ basic module 3×4 , including Staircase landing and extension module 3×4 , railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 5478 × H 3936 × D 9631 mm | 1891.794 lbs



Basic Module


3 × 4, staircase landing and extension module 3 × 4



DFL 388PR.90

 $1\times$ basic module $3\times4,$ including Staircase landing and extension module $3\times4,$ railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 5478 \times H 3936 \times D 9631 mm | 1892.08 lbs



Basic Module


3 × 4, staircase landing and extension module 3 × 4



DFL 383PL.90

 $1\times$ basic module 3×4 , including Staircase landing and extension module 3×4 , railing supports for parapet height of 1150 mm, single flight of stairs 35° left, $14\times$ step DFL 532, not included: walkable floor disc (2 \times 19 mm) and parapet infills

aluminium | W 4681 × H 3936 × D 8146 mm | 1891,988 lbs



Basic modules 3 × 4

Basic Module


3 × 4, staircase landing and extension module 3 × 4



DFL 383PR.90

 $1\times$ basic module 3×4 , including Staircase landing and extension module 3×4 , railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 4681 × H 3936 × D 8146 mm | 1891.979 lbs



Basic Module


3 × 4, staircase landing and extension module 3 × 4



DFL 644PL.90

1 × basic module 3 × 4, including Staircase landing and extension module 3 × 4, railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 6166 \times H 3936 \times D 5671 mm | 1802.746 lbs



Basic Module


3 × 4, staircase landing and extension module 3 × 4



DFL 644PR.90

 $1\times$ basic module 3×4 , including Staircase landing and extension module 3×4 , railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 6166 \times H 3936 \times D 5671 mm | 1802.737 lbs



Basic Module


3 × 4, staircase landing and extension module 3 × 4



DFL 383PLM.90

1 × basic module 3 × 4, including Staircase landing and extension module 3 × 4, railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 4681 × H 3936 × D 8146 mm | 1882.327 lbs



Basic Module


3 × 4, staircase landing and extension module 3 × 4



DFL 383PRM.90

 $1\times$ basic module 3×4 , including Staircase landing and extension module 3×4 , railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 4681 × H 3936 × D 8146 mm | 1882.318 lbs



Basic modules 3 × 4

Basic Module


3 × 4, staircase landing and extension module 3 × 4



DFL 646PL.90

 $1\times$ basic module 3×4 , including Staircase landing and extension module 3×4 , railing supports for parapet height of 1150 mm, single flight of stairs 35° left, $14\times$ step DFL 532, not included: walkable floor disc (2 \times 19 mm) and parapet infills

aluminium | W 7651 × H 3936 × D 5478 mm | 1802.931 lbs



Basic Module


3 × 4, staircase landing and extension module 3 × 4



DFL 646PR.90

 $1\times$ basic module 3×4 , including Staircase landing and extension module 3×4 , railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 7651 × H 3936 × D 5478 mm | 1802.627 lbs



Basic Module


3 × 4, staircase landing and extension module 4 × 4



DFL 744PL.90

 $1\times$ basic module 3×4 , including Staircase landing and extension module 4×4 , railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 7156 × H 3936 × D 5671 mm | 1935.864 lbs



Basic Module


3 × 4, staircase landing and extension module 4 × 4



DFL 744PR.90

1 × basic module 3 × 4, including Staircase landing and extension module 4 × 4, railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 7156 × H 3936 × D 5671 mm | 1935.855 lbs



Basic Module

3 × 4, staircase landing and extension module 4 × 4



DFL 744PLM.90

 $1\times$ basic module 3×4 , including Staircase landing and extension module 4×4 , railing supports for parapet height of 1150 mm, single flight of stairs 35° left, $14\times$ step DFL 532, not included: walkable floor disc (2 \times 19 mm) and parapet infills

aluminium | W 8488 × H 3936 × D 5671 mm | 1926.203 lbs



Basic modules 3 × 4

Basic Module


3 × 4, staircase landing and extension module 4 × 4



DFL 744PRM.90

 $1\times$ basic module 3×4 , including Staircase landing and extension module 4×4 , railing supports for parapet height of 1150 mm, single flight of stairs 35° right, $14\times$ step DFL 532, not included: walkable floor disc (2 \times 19 mm) and parapet infills

aluminium | W 8488 × H 3936 × D 5671 mm | 1926.194 lbs



Basic Module


3 × 4, staircase landing and extension module 4 × 4



DFL 747PL.90

1 × basic module 3 × 4, including Staircase landing and extension module 4 × 4, railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 8641 × H 3936 × D 5478 mm | 1935.762 lbs



Basic Module


3 × 4, staircase landing and extension module 4 × 4



DFL 747PR.90

 $1\times$ basic module 3×4 , including Staircase landing and extension module 4×4 , railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 8641 × H 3936 × D 5478 mm | 1935.754 lbs



Basic modules 4 × 4

Basic Module

4 × 4, stair left and extension module 3 × 4



DFL 474L.90

1 × basic module 4 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 11128 × H 3936 × D 4186 mm | 1652.555 lbs



Basic Module

4 × 4, stair right and extension modul 3 × 4



DFL 474R.90

1 × basic module 4 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 11128 \times H 3936 \times D 4186 mm | 1652.546 lbs



Basic Module


4 × 4, stair left and extension module 3 × 4



DFL 477L.90

1 × basic module 4 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 7156 \times H 3936 \times D 8158 mm | 1652.555 lbs



Basic Module


4 × 4, stair right and extension module 3 × 4



DFL 477R.90

1 × basic module 4 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 7156 × H 3936 × D 8158 mm | 1652.546 lbs



Basic Module


4 × 4, stair left and extension module 3 × 4



DFL 474LM.90

1 × basic module 4 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 7156 × H 3936 × D 8158 mm | 1646.924 lbs



Basic modules 4 × 4

Basic Module


4 × 4, stair right and extension module 3 × 4



DFL 474RM.90

 $1\times$ basic module 4×4 and extension module 3×4 , including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 7156 × H 3936 × D 8158 mm | 1646.924 lbs



Basic Module


4 × 4 stair left



DFL 444L.90

1 × basic module 4 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 8158 × H 3936 × D 4186 mm | 1204.915 lbs



Basic Module


4 × 4 stair right



DFL 444R.90

 $1\times$ basic module 4×4 , including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, $14\times$ step DFL 532, not included: walkable floor disc (2 \times 19 mm) and parapet infills

aluminium | W 8158 \times H 3936 \times D 4186 mm | 1204.907 lbs



Basic Module

4 × 4, stair left and extension modul 4 × 4



DFL 844L.90

1 × basic module 4 × 4 and extension module 4 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 4186 × H 3936 × D 12118 mm | 1785.673 lbs



Basic Module

4 × 4, stair right and extension module 4 × 4



DFL 844R.90

1 × basic module 4 × 4 and extension module 4 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 4186 × H 3936 × D 12118 mm | 1785.664 lbs



Basic modules 4 × 4

Basic Module


4 × 4, stair left and extension modul 4 × 4



DFL 848L.90

1 × basic module 4 × 4 and extension module 4 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 8146 × H 3936 × D 8158 mm | 1785.673 lbs



Basic Module


4 × 4, stair right and extension modul 4 × 4



DFL 848R.90

1 × basic module 4 × 4 and extension module 4 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 8146 × H 3936 × D 8158 mm | 1785.664 lbs



Basic Module


4 × 4, staircase landing and extension modul 3 × 4



DFL 474PL.90

 $1\times$ basic module 4×4 , with staircase landing and extension module 3×4 , including railing supports for parapet height of 1150 mm, single flight of stairs $35^{\rm o}$ left, $14\times$ step DFL 532, not included: walkable floor disc (2 \times 19 mm) and parapet infills

aluminium | W 7156 × H 3936 × D 5671 mm | 1935.762 lbs



Basic Module


4 × 4, staircase landing and extension modul 3 × 4



DFL 474PR.90

1 × basic module 4 × 4, with staircase landing and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 7156 × H 3936 × D 5671 mm | 1935.754 lbs



Basic Module


4 × 4, staircase landing and extension module 3 × 4



DFL 474PLM.90

 $1\times$ basic module 4×4 , with staircase landing and extension module 3×4 , including railing supports for parapet height of 1150 mm, single flight of stairs $35^{\rm o}$ left, $14\times$ step DFL 532, not included: walkable floor disc (2 \times 19 mm) and parapet infills

aluminium | W 8488 × H 3936 × D 5671 mm | 1926.102 lbs



Basic modules 4 × 4

Basic Module


4 × 4, staircase landing and extension module 3 × 4



DFL 474PRM.90

1 × basic module 4 × 4, with staircase landing and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 8488 × H 3936 × D 5671 mm | 1926.093 lbs



Basic Module


4 × 4, staircase landing and extension module 3 × 4



DFL 477PL.90

1 × basic module 4 × 4, with staircase landing and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 8641 × H 3936 × D 5478 mm | 1935.762 lbs



Basic Module

4 × 4, staircase landing and extension module 3 × 4



DFL 477PR.90

1 × basic module 4 × 4, with staircase landing and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 8641 × H 3936 × D 5478 mm | 1935.754 lbs



Basic Module

4 × 4 staircase landing



DFL 444PL.90

1 × basic module 4 × 4, including Staircase landing, railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 5478 × H 3936 × D 5671 mm | 1488.123 lbs



Basic Module


4 × 4 staircase landing



DFL 444PR.90

1 × basic module 4 × 4, including Staircase landing, railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 5478 × H 3936 × D 5671 mm | 1488.114 lbs



Basic modules 4 × 4

Basic Module


4 × 4, staircase landing and extension module 4 × 4



DFL 844PL.90

 $1\times$ basic module 4×4 , including Staircase landing and extension module 4×4 , railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 \times step DFL 532, not included: walkable floor disc (2 \times 19 mm) and parapet infills

aluminium | W 5671 × H 3936 × D 9245 mm | 2068.881 lbs



Basic Module


4 × 4, staircase landing and extension module 4 × 4



DFL 844PR.90

1 × basic module 4 × 4, including Staircase landing and extension module 4 × 4, railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 5671 × H 3936 × D 9245 mm | 2068.872 lbs



Basic Module


4 × 4, staircase landing and extension module 4 × 4



DFL 848PL.90

 $1\times$ basic module 4×4 , including Staircase landing and extension module 4×4 , railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 9631 × H 3936 × D 5478 mm | 2068.881 lbs



Basic Module

4 × 4, staircase landing and extension module 4 × 4



DFL 848PR.90

1 × basic module 4 × 4, including Staircase landing and extension module 4 × 4, railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

aluminium | W 9631 \times H 3936 \times D 5478 mm | 2068.872 lbs



Extension modules

Extension Modul

3 × 4 W 4033 × H 3936 × D 3196 mm



DFL 34EM1.90

including railing posts for railing height 1150 mm, beams DFL 490...and handrail extrusions not included: wooden floor (2 x 19 mm) and balustrade infills (required for stability)

aluminium | W 4033 × H 3936 × D 3196 mm | 557.98 lbs



■ Attention: Proof of stability of extrusion is required

Extension Modul

3 × 4 W 4186 × H 3936 × D 3034 mm



DFL 34EM2.90

including railing posts for railing height 1150 mm, beams DFL 490...and handrail extrusions not included: wooden floor (2×19 mm) and balustrade infills (required for stability)

aluminium | W 4186 × H 3936 × D 3034 mm | 481.674 lbs



■ Attention: Proof of stability of extrusion is required

Extension Modul

4 × 4 W 4186 × H 3936 × D 4033 mm



DFL 44EM1.90

including railing posts for railing height 1150 mm, beams DFL 490...and handrail extrusions not included: wooden floor (2 x 19 mm) and balustrade infills (required for stability)


aluminium | W 4186 \times H 3936 \times D 4033 mm | 615.738 lbs



■ Attention: Proof of stability of extrusion is required

₹ Truss system

Overview

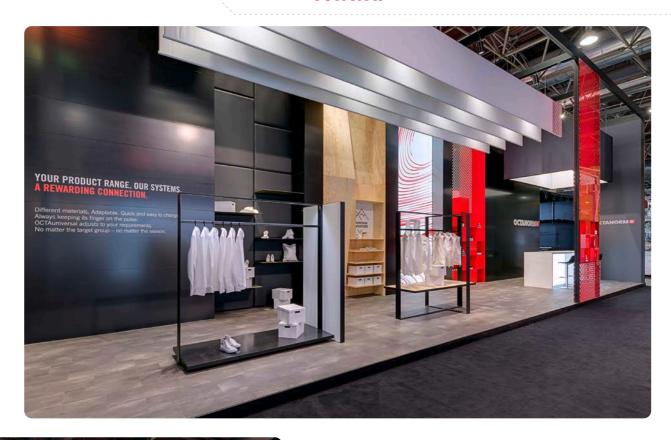





₹ Truss system

Overview





octarig 1 System. 3 Designs.




对 octarig

Index

7 TECHNICAL FEATURES	486
→ OVERVIEW	488
尽 COMPONENTS	
Basic parts Basic	490
Accessories Acces	493
	496
	497
7 Hinges	498





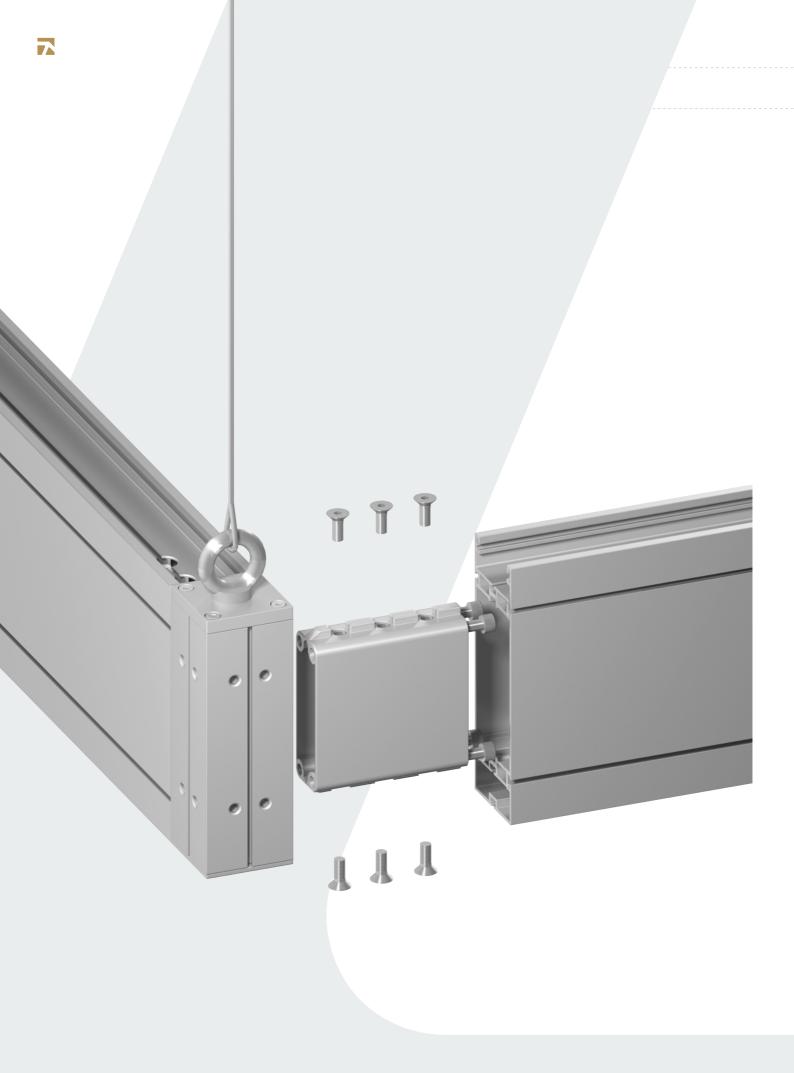


对 octarig

Technical features





for heavy loads





beam retainer



junction



angle connection



tension brace junction



lateral fabric attachment



bottom fabric attachment



covei



round tube mounting

Suspension points.

Do you want to get rid of all the visible supports? octarig can be easily hung from the existing ceiling using suspension points. This allows you to showcase your stand area and product without interruption.

Compatible. Flexible. Adjustable.

Invisible cable management, track mounting and countless possibilities to individualize the system make it ideal for the construction of your project. Rotated through 180°, the power rails can already be prefitted on the floor. With its high load capacity, octarig sets standards in terms of safety both in connection with stage and event technologies and no matter if used with hanging banners or fabric tensioning.


Technical Details:

- → wide span of up to 12 m
- → high load capacity
- → easy assembly with only a few parts
- → invisible cable management
- → individual design possibilities
- → compatible with stage and event technologies
- → connection at variable angles with hinged elements
- → power rail mounting


Overview


Basic parts

































































Fabric/Panel/Glass









Overview

Hinges



R 350

7 octarig

Basic parts

Supporting beam


for R 260 / R 290 L 6930 × W 240 × H 80 mm




R 102.01

for adaptor R 260 and connector R 290, for installation of 4 \times tension lock Z 961/13

aluminium | L 6930 × W 240 × H 80 mm | 117.351 lbs






Cover extrusion


for extrusion R 102 L 6930 × W 80 × H 14 mm



R 122.01

for use with supporting beam extrusion R 102 aluminium | L 6930 \times W 80 \times H 14 mm | 9.524 lbs





Upright extrusion


4 system grooves L 5040 × W 80 × H 80 mm




DFS 84.01

as upright, upright extension and upright pylon extension, with 4 system grooves $\,$

aluminium | L 5040 \times W 80 \times H 80 mm | 85.869 lbs





Supporting beam


6 system grooves L 7000 × W 200 × H 40 mm



M 770.01

2 × tension lock Z 961/8 can be mounted in 2 positions or 3 × tension lock Z 961/13 with adaptor Z 161/A, with 6 system grooves aluminium | L 7000 × W 200 × H 40 mm | 78.336 lbs






→ Attention: Pay attention to lock direction.

Round extrusion

16 mm dia. L 6000 × W 16 × H 16 mm




M 1460.01

16 mm dia.

aluminium | L 6000 × W 16 × H 16 mm | 5.659 lbs





对 octarig

Basic parts

Internal connector


straight for urpight extrusion DFS 84



R 212.37

for upright extrusion extension / support pylon extension made of extrusion DFS 84, with 8 \times countersunk screw R213 (M10)

steel | L 480 × W 43 × H 43 mm | 10.988 lbs



Connector


with eyelet 35 mm dia. for R 260




R 200.01

to mount adaptor R 260 in case of suspension, incl. eyelet 35 mm dia., with 16 \times thread M10

aluminium/steel | L 80 × W 80 × H 303 mm | 6.437 lbs







Attention: max. load capacity 500 kg

Connector


for R 206 / DFS 84 L 80 × W 80 × H 480 mm



R 210.01

to mount adaptor R 260, for elevation of the construction, plug on and screw to uprights made of DFS 84, incl 16 \times thread M10 aluminium/steel | L 80 \times W 80 \times H 480 mm | 15.481 lbs





Connector


for pylon construction for R 260



R 400.37

for pylon construction with tension brace junction knot R 408, to screw on adaptor R 260, incl. 16 \times thread M10

aluminium/steel | L 80 × W 80 × H 273 mm | 4.363 lbs





Connector part


for DFS 84 / R 102 L 140 × W 152 × H 46 mm




R 260.01

to mount to upright extrusion DFS 84 and supporting beam R 102, incl. 4 × cylinder screw R 260/21 (M10) and 6 × contersunk screw DFL 340/5S (M10)

aluminium | L 140 \times W 152 \times H 46 mm | 2.535 lbs





Attention: R 260 required for mounting of supporting beam R 102 between two upright extrusions DFS 84

7 octarig

Basic parts

Internal connector


450 mm long for extrusion R 102



R 290.01

straight, for connection of 2 \times supporting beam R 102, incl. 12 \times countersunk screw DFL 340/5S (M10)

aluminium | L 450 \times W 152 \times H 46 mm | 5.06 lbs



Attention: R 290 required for mounting of extended supporting beam between two upright extrusions DFS 84

Internal connector


1500 mm long for extrusion R 102




R 295.01

straight, for connection of 2 × supporting beam R 102, incl. 12 × countersunk screw DFL 340/5S (M10)

aluminium | L 1500 × W 152 × H 46 mm | 16.865 lbs





Attention: R 295 required for mounting of extended supporting beam between two upright extrusions DFS 84

Accessories

Floor panel


M8 for DFS 84 / DFL 150



DFL 180.37

for upright DFS 84 / DFL 150, for centre, edge or corner setup, with 6 × drill hole for countersunk screw M8, incl. 4 × contersunk screw M8 × 25 DFL 180/20

steel | L 200 × W 200 × H 8 mm | 5.575 lbs





End plate


for extrusion R 102 L 241 × W 81 × H 8 mm



R 135.21

for use with supporting beam extrusion R 102, with 4 \times set screw M 1075/20 (M4)

steel | L 241 × W 81 × H 8 mm | 1.027 lbs





Tension brace knot


for R 200 L 70 × W 70 × H 32 mm




R 408.37

for modification of connector R 200, incl. 1 \times cylinder screw R 408/20 (M16)

steel | L 70 \times W 70 \times H 32 mm | 0.699 lbs





Tension brace knot


for upright extrusion DFS 84 L 80 × W 80 × H 12 mm



R 420.37

to mount to upright pylon extension DFS 84, incl. 4 \times cylinder screw R 200-20 (M8)

steel | L 80 \times W 80 \times H 12 mm | 4.956 lbs






Quicklink


M8 for round tube M 1460



M 1137.37

for mounting to round tube M 1460, incl. 1 \times set screw M 1137/20 /M8), 1 \times hexagon nut M 1137/30 (M8) and spring hinged bolt steel | L 95 \times W 22 \times H 16 mm | 0.179 lbs





Accessories

Fixing set


for system groove 4.3 mm for power rails




R 370.21

for mounting power rails to 4.3 mm system groove, with fixing accessories M5 (SW 8 mm) $\,$

aluminium | L 32 × W 32 × H 12 mm | 0.044 lbs






End cap


for 24 mm dia. drill hole L 29 × W 29 × H 8 mm



R 355.35

to cover drill holes with 24 mm dia. plastic | L $29 \times W 29 \times H 8 \text{ mm}$ |





End cap

for 13 mm dia. drill hole L 17 × W 17 × H 7.2 mm



DFZ 32.35

to cover drill holes with 13 mm dia. plastic | L 17 \times W 17 \times H 7.2 mm |





Fixing set


max. 300 kg for rope suspension



R 300.37

to turn into supporting beam extrusion R 102, for rope suspension, with eyelet 35 mm dia.

steel | L 73 \times W 127 \times H 89 mm | 2.326 lbs





→ Attention: max. load capacity 300 kg

Connector part


max. 150 kg for rope suspension




M 1172.37

usable for rope suspension, for connection to 4.3 mm system groove, incl. 3 \times set screw M 1435/70 (M8) and 2 \times lenticular flange head screw M 1557/20 (M6), max. load capacity 150 kg

steel | L 136 × W 66 × H 50 mm | 1.182 lbs





→ Attention: max. load capacity 150 kg

Accessories

Connector part


max. 100 kg for rope suspension



M 1174.37

usable for rope suspension, for connection to 4.3 mm system groove, incl. 2 \times set screw M 1435/70 (M8) and 2 \times lenticular flange head screw M 1557/20 (M6), max. load capacity 100 kg

steel | L 76 × W 66 × H 8 mm | 0.562 lbs

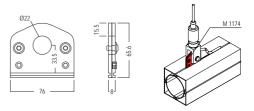

→ Attention: max. load capacity 100 kg

对 octarig

Safety parts

Beam retainer


90° for 2 × extrusion R 102




R 320.37

for additional securing of 2 × supporting beam R 102 at an angle of 90°, incl. 2 × hammerhead screw M 810/HA (M10) and 2 × hammerhead screw E 265 (M10)

steel | L 170 \times W 120 \times H 37 mm | 1.014 lbs





■ Attention: necessary for safety reasons

Beam retainer


90° for 3 × extrusion R 102




R 322.37

for additional securing of 3 × supporting beam R 102 at an angle of 90°, incl. 2 × hammerhead screw M 810/HA (M10) and 4 × hammerhead screw E 265 (M10)

steel | L 300 × W 120 × H 37 mm | 1.984 lbs





■ Attention: necessary for safety reasons

Beam retainer


90° for extrusion R 102+M 770




R 330.37

for additional securing of supporting beam M 770 to supporting beam R 102 at an angle of 90°, incl. 4 × hammerhead screw M 810/HA (M10)

steel | L 150 × W 120 × H 37 mm | 0.948 lbs





■ Attention: necessary for safety reasons

Reinforcement


for R 260 / DFS 84 L 240 × W 78 × H 240 mm




R 240,21

for reinforcement of elevated OCTArig designs, for connector R 260 and upright extrusion DFS 84, two-piece, incl. 4 \times contersunk screw DFL 340/5S(M8), 2 \times contersunk screw R 240/20 (M8) and 2 \times contersunk screw R 240/21 (M8)

steel | L 240 × W 78 × H 240 mm | 13.554 lbs





R 260 required for assembly of upright DFS 84 with R 210 and R 102.

Reinforcement


with 4 × M 1435/70 L 300 × W 8 × H 300 mm




M 1139.37

for system groove 4.3 mm, incl. 4 \times set screw M 1435/70 (M8) and 4 \times round head screw with flange M 1557/20 (M6)

steel | L 300 × W 8 × H 300 mm | 4.361 lbs





对 octarig

Fabric/Panel/Glass


Tension fabric extr.

for double sided fabric L 6000 × W 80 × H 9 mm



M 1325.01

for double sided fabric (with silicone edge M 1313), for mounting in system groove with fixing set M 1345, with 13 × hole 18 mm dia. aluminium | L 6000 × W 80 × H 9 mm | 11.751 lbs



▼ in connection M 1345


Tension fabric extr.


for double sided fabric L 6000 × W 120 × H 9 mm



M 1330.01

for double sided fabric (with silicone edge M 1313), for mounting in system groove with fixing set M 1345, with 13 × hole 18 mm dia. aluminium \mid L 6000 × W 120 × H 9 mm \mid 18.254 lbs





M 1325

■ in connection with M 1345


Tension fabric extr.


for double sided fabric L 6000 × W 40 × H 10 mm



M 1310.01

for double sided fabric (with silicone edge M 1313), for mounting in system groove with fixing set M 1345, with 13 × hole 18 mm dia. aluminium | L 6000 × W 40 × H 10 mm | 5.939 lbs





n connection with M 1345

Fixing set


for M 1310/M 1325/M 1330 L 28 × W 24 × H 24 mm




M 1345.37

only for fixing of extrusions M 1310 / M 1325 / M 1330 to system groove 4.3 mm, with 1 \times hammerhead screw M 1345/Ha "gunmetal finish"

steel | L 28 × W 24 × H 24 mm | 0.086 lbs





Hinges

Hinged end plate


set, max 100 kg for extrusion R 102+M 770



R 350.21

for connection of supporting beam M 770 to supporting beam R 102 at variable angles, consisting of 2 × hinged flange plate M 1557 and 1 × wing nut set R 350/FS


steel | L 155 × W 49 × H 211 mm | 4.217 lbs

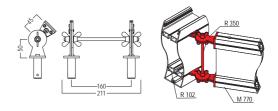


→ Attention: max. load capacity 100 kg

尽 Double floor system →

Overview

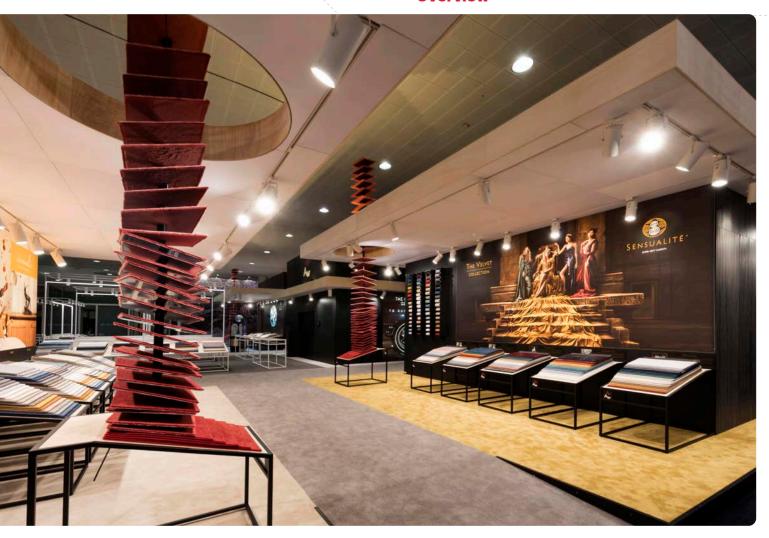


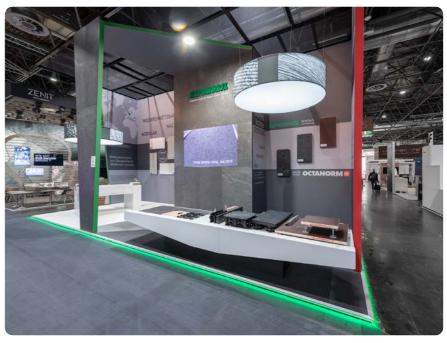


尽 ■ Double floor system

Overview



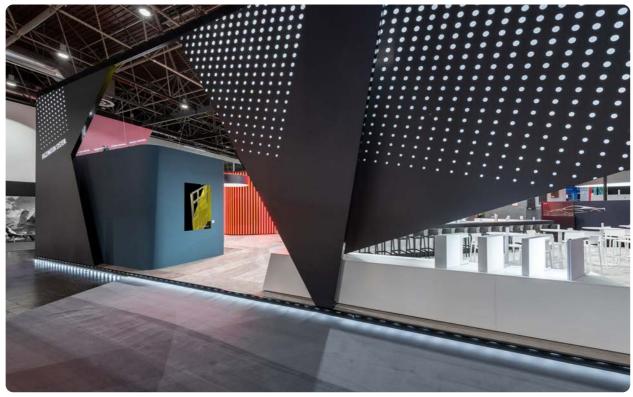

octafloor classic/eco

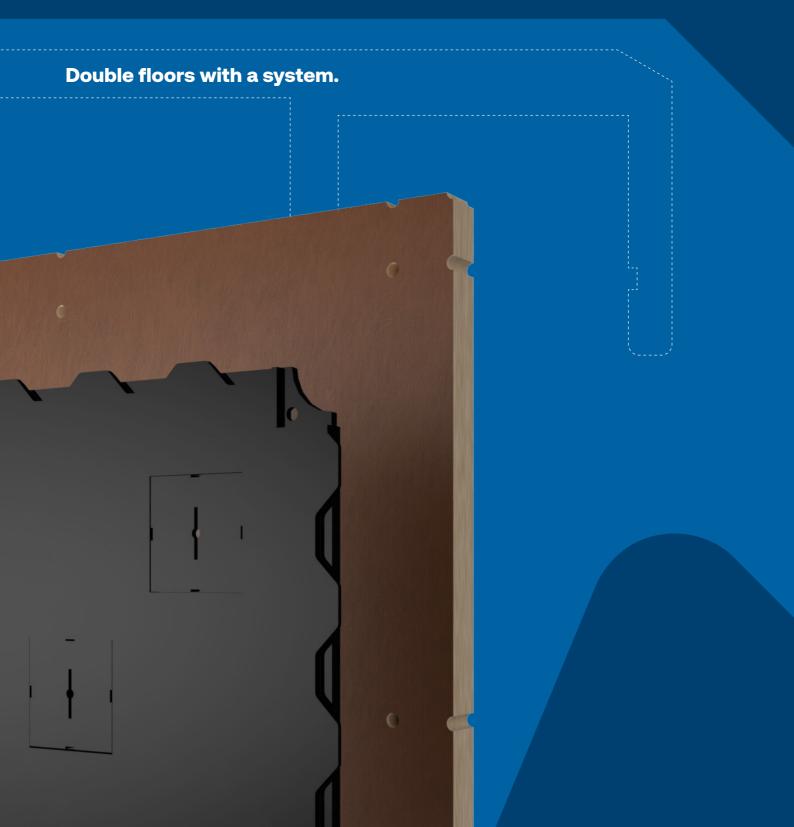

₹ octafloor

Index

🗷 octaclassic floor	505
1 00tacia5510 11001	300

对 octaeco floor 515




product

brochure



octafloor classic

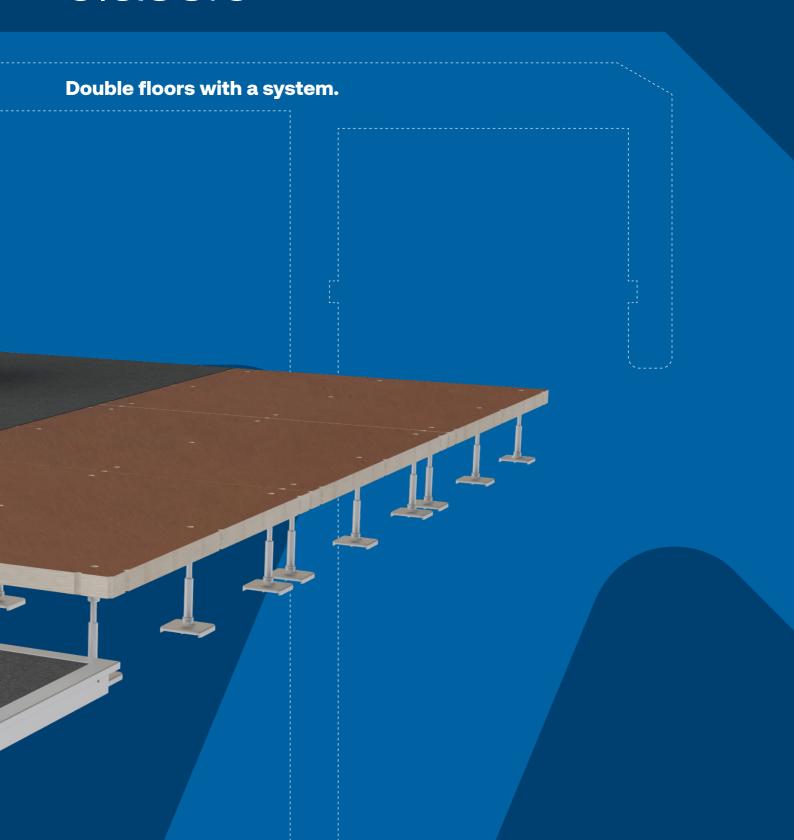

Index

TECHNICAL FEATURES	506
OVERVIEW	508
7 COMPONENTS	
Basic parts	509
Accessories	510
7 Tools	512



Technical features





different adjustable feet





illluminated edge guards possible



rotating the panel

25 m² of floor panels on one pallet

High working loads. Child's play.

The working load limit can be adjusted individually through the amount of feet installed. Depending on your requirements, 4 up to 9 feet can be installed to maximize the loading capacity.


3 panel sizes. Countless possibilities.

The standard sizes of our floor panels are 998×998 mm, 998×498 , and 498×498 mm. But since the SP 12 tile can be cut to size individually, this does not limit your freedom in the slightest.

Stairs. Infinitely.

The system offers three different feet, two of which are infinitely variable: allowing for heights of 95 – 225 mm (including tile height).

Overview

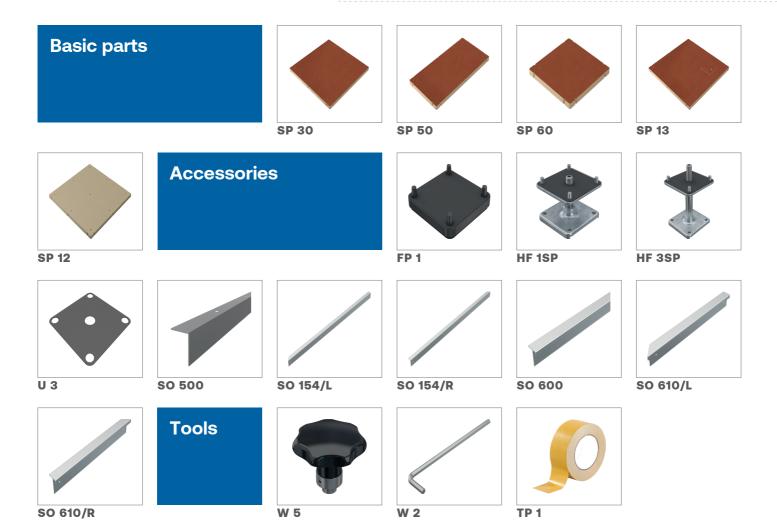

Basic parts

Sandwich panel


L 998 × W 998 × H 40 mm




SP 30.90

smooth surface on top and on the bottom, with a surrounding frame, using waterproofed glue, wooden lattice Pino in the core, can be used as middle-, edge- or corner panel, with holes for the positioning of adjustable feet HF 1SP / HF 3SP or base plate FP 1

wood, medium density fibre board on both sides, MDF B1, flame-retardant | L 998 \times W 998 \times H 40 mm | 29.923 lbs





7 for higher load factor up to 9 adjustable feet can be used

Sandwich panel


L 998 × W 498 × H 40 mm



SP 50.90

smooth surface on top and on the bottom, with a surrounding frame, using waterproofed glue, wooden lattice Pino in the core, can be used as middle-, edge- or corner panel, with holes for the positioning of adjustable feet HF 1SP / HF 3SP or base plate FP 1


wood, medium density fibre board on both sides, MDF B1, flame-retardant | L 998 × W 498 × H 40 mm | 14.143 lbs



7 for higher load factor up to 6 adjustable feet can be used

Sandwich panel


L 498 × W 498 × H 40 mm



SP 60.90

smooth surface on top and on the bottom, with a surrounding frame, using waterproofed glue, wooden lattice Pino in the core, can be used as middle-, edge- or corner panel, with holes for the positioning of adjustable feet HF 1SP / HF 3SP or base plate FP 1

wood, medium density fibre board on both sides, MDF B1, flame-retardant | L $498 \times W$ $498 \times H$ 40 mm | 6.228 lbs



7 for higher load factor up to 4 adjustable feet can be used

Sandwich panel


with cutout L 998 × W 998 × H 40 mm




SP 13.90

smooth surface on top and on the bottom, with a surrounding frame, using waterproofed glue, wooden lattice Pino in the core, can be used as middle-, edge- or corner panel, with holes for the positioning of adjustable feet HF 1SP / HF 3SP or base plate FP 1, incl. a cut-out 195 \times 195 mm and 1 \times cover plate U 6

wood, medium density fibre board on both sides, MDF B1, flame-retardant | L 998 × W 998 × H 40 mm | 30.805 lbs





 $\ensuremath{ \hbox{7} \hspace{-1.5pt}\hbox{7} }$ for higher load factor up to 9 adjustable feet can be used


Floor panel


L 998 × W 998 × H 39 mm



SP 12.90

for any cut-outs or special panel shapes, with holes for the positioning of adjustable feet HF 1SP / HF 3SP and base plate FP 1 mdf board | L 998 \times W 998 \times H 39 mm | 58.422 lbs





■ up to 9 adjustable feet can be used

Accessories

Base plate


L 85 × W 85 × H 27 mm




FP 1.90

for mounting of sandwich panel SP 10 ... SP 40 with anti-rattle pad, for low pedestals, minimum height 56 mm, no height adjustment possible, clearance height of 16 mm enables cabling

plastic/rubber | L 85 × W 85 × H 27 mm | 0.234 lbs





■ not adjustable in height


Adjustable foot


55-105 mm L 90 × W 85 × H 105 mm



HF 1SP.00

height adjustable 55-105 mm, adjustable from top with hexagon wrench W 2, with upper retainer pins and anti rattle pad U 3 zinc die cast \mid L 90 × W 85 × H 105 mm \mid 1.797 lbs





■ load capacity max. 2000 kg

Adjustable foot


135-185 mm L 90 × W 85 × H 185 mm



HF 3SP.00

stepless height adjustment from 135 to 185 mm, adjustable from above with hexagon wrench SW 6, with upper retainer pins and anti rattle pad U 3


zinc die cast | L 90 \times W 85 \times H 185 mm | 2.127 lbs

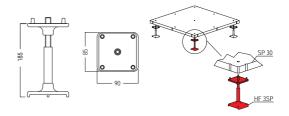

■ load capacity max. 2000 kg

Anti rattle


L 82 × W 82 × H 1 mm



U 3.90

for adjustable feet HF 1SP / HF 3SP or base plate FP 1, also prevents slipping of panels $\,$

rubber, black | L 82 \times W 82 \times H 1 mm | 0.009 lbs





Skirting extrusion


L 5000 × W 40 × H 60 mm




SO 500.11

edging element of floor construction and fixing for skirting rail SOB 200/9, every 500 mm countersunk holes for wood screws 4 mm dia

aluminium | L 5000 × W 40 × H 60 mm | 5.56 lbs





Accessories

Skirting extrusion


Miter 45°, left L 1540 × W 40 × H 60 mm




SO 154/L.11

1 × skirting extrusion made of SO 500, edging element for floor construction and fixing for skirting rail SOB 200/9, with 4 × countersunk hole for wood screws Ø 4 mm, 45° miter cut on the left side

aluminium | L 1540 × W 40 × H 60 mm | 1.792 lbs





Skirting extrusion


Miter 45°, right L 1540 × W 40 × H 60 mm




SO 154/R.11

1 × skirting extrusion made of SO 500, edging element for floor construction and fixing for skirting rail SOB 200/9, with 4 × countersunk hole for wood screws Ø 4 mm, 45° miter cut on the right side

aluminium | L 1540 × W 40 × H 60 mm | 1.792 lbs





Skirting extrusion

for LED module L 5000 × W 40 × H 58 mm





SO 600.01

for use with sandwich panel SP 30 – SP 60, countersunk holes every 500 mm for wood screws 4 mm dia., in connection with base plate FP 1 $\,$

aluminium | L 5000 × W 40 × H 58 mm | 7.297 lbs







Skirting extrusion


for LED-module Miter 45°, left



SO 610/L.01

1 × skirting extrusion made of SO 600, for use with sandwich panel SP 30 – SP 60, 2 × countersunk hole for wood screws 4 mm dia., in connection with base plate FP 1, miter cut 45° on the left side aluminium | L 517.5 × W 40 × H 58 mm | 0.747 lbs






Skirting extrusion


for LED module Miter 45°, right



SO 610/R.01

1 × skirting extrusion made of SO 600, for use with sandwich panel SP 30 – SP 60, 2 × countersunk hole for wood screws 4 mm dia., in connection with base plate FP 1, miter cut 45° on the right side aluminium | L 517.5 × W 40 × H 58 mm | 0.747 lbs





Tools

Foot locking device

L 63 × W 63 × H 62 mm




W 5.90

used during panel installation as installation aid for positioning an adjustable foot HF 1SP / HF 3SP in the center of a sandwich panel SP 30, SP 13 and SP 12, with internal thread M12

steel/plastic | L 63 \times W 63 \times H 62 mm | 0.243 lbs





Hexagon wrench


A/F 6 mm



W 2.90

to adjust feet HF 1SP / HF 3SP, A/F 6 mm steel | L 0 x B 6 x H 6 mm | 0.67 lbs





Таре

double-sided 50 meter roll




TP 1.90

for fixing carpets on phenol coated panels SP 30 / SP 13 / SP 12 / SP 50 / SP 60, layers on both sides with rubber adhesive, 50 m long $\,$

rayon | W 50 × H 1 mm | 0.441 lbs

octafloor eco

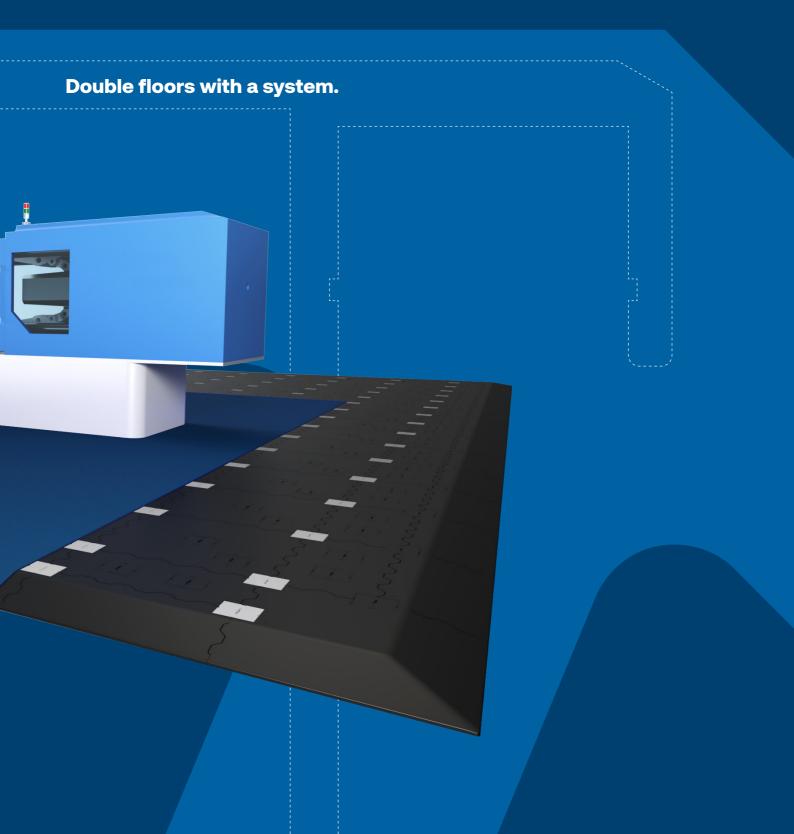


Index

7 TECHNICAL FEATURES	516
7 OVERVIEW	518
7 COMPONENTS	
7 Basic parts	519
7 Accessories	520
7 Tools	524
⊿ Sets	525



Technical features

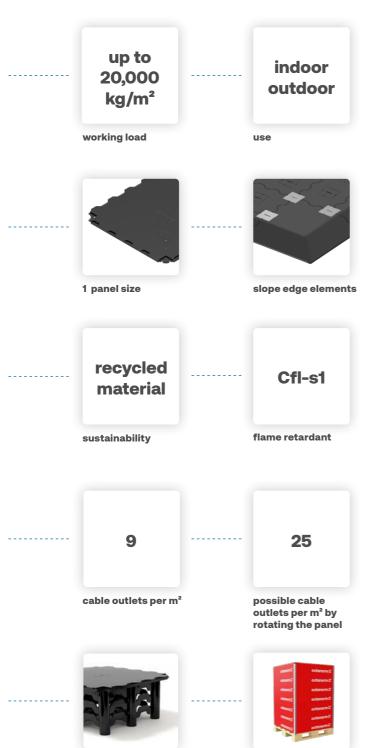

stackable height

adaptors

25 m² of floor panels on one pallet

Large areas. Little time.

The **octaeco floor**'s biggest advantage is the fast installation. Big areas – effortless.

For heavy weights of up to 20,000 kg/m².

The well thought-out design offers maximum stability, making the floor perfect for high loads. You can even drive on it. The material is nonsensitive to moisture and thermal fluctuation.

Effortless assembly. Thanks to a simple connecting system.

The low weight in combination with the smart connector system allows for a quick and easy installation of your floor. Even with little personnel.

Individuality. With a system.

The panels can be turned 360°, allowing for a maximum of 25 possible cable outlets per m². And if you need individually adjusted special panel shapes, **octaeco floor** also offers a panel that can be cut to size. Thanks to the stackable adaptors, the raised floor system is also flexible in terms of height and barrier-free thanks to ramps – no more steps or trip hazards.

Overview

Basic parts







F 308 CFL S1



F 309 CFL S1



F 315 CFL S1

Accessories



F 312 CFL S1



F 314 CFL S1



F 106 CFL S1



F 107 CFL S1



F 313 CFL S1



SO 400



SO 410/L



SO 410/R



SO 630



SO 630/L



SO 630/R



SO 620



SO 620/L



SO 620/R



SO 640




SO 640/L



SO 640/R



SO 641



SO 642





F 1



F 2



TP 1



ECO25 CFL S1



SLO25 CFL S1

Basic parts

Floor panel


flame retardant Cfl-S1 1 m² (4 floor panels)



F 304 CFL S1.90

 $1~\text{m}^2$ consisting of $4\times$ floor panel, each floor panel with $2\times$ cable outlet (dia. 35/70 mm), incl. $4\times$ cover plate F 106 Cfl S1, $8\times$ cover plate F 107 Cfl S1 and $1\times$ connector F 314 Cfl S1, flame retardant Cfl-S1, connectors for F 304 not included


polypropylene, black | L 1017 × W 1017 × H 43 mm | 24.162 lbs

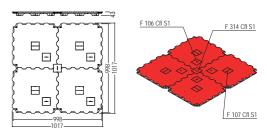

→ cable outlets dia. 35/70 mm

Revision panel


flame retardant Cfl-S1 removable



F 308 CFL S1.90

1 × floor panel for individual cut-outs or customized shapes, the revision panel can be removed upwards from the laid floor, with 2 × cut out for cable outlet (Ø 35/70 mm), 2 × cover plate F 107 Cfl S1 and 1 × cover plate F 106 Cfl S1, flame retardant Cfl-S1, connector for connection to other floor panels not included

polypropylene, black | L 498 × W 498 × H 43 mm | 5.512 lbs

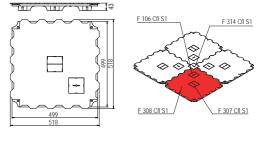

■ cable outlets dia. 35/70 mm

Slope edge corner tile


flame retardant Cfl-S1 Corner



F 309 CFL S1.90

1 × Slope edge corner tile F 309-oZ Cfl S1 with 1 x cover plate F 314 Cfl S1 for connection with slope edge element F 315 Cfl S1, flame retardant Cfl-S1

polypropylene, black | L 467 × W 467 × H 42 mm | 4.131 lbs

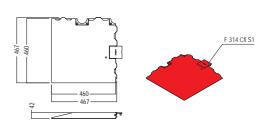

■ standard size of 500 x 500 mm is obtained incl. SO 640

Slope edge tile


flame retardant Cfl-S1 L 495 × W 468 × H 43 mm



F 315 CFL S1.90

1 × floor panel F 310 Cfl S1 with 2 × cut out for cable outlet (dia. 35/70 mm) incl. 2 × cover plate F 106 Cfl S1, 2 × cover plate F 314 Cfl S and 1 × slope edge element F 311 Cfl S1 (fixed to F 310 Cfl S1 with 2 × connector SO 650), flame retardant Cfl-S1

polypropylene, black | L 495 × W 468 × H 43 mm | 5.071 lbs

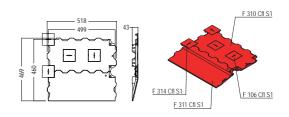

Accessories

Height adaptor


flame retardant CfI-S1 for floor panel 498×498 mm




F 312 CFL S1.90

 $1\times$ attachment for floor panel 498 \times 498 mm, raises the floor by another 57 mm (floor panel + height adaptor = 100 mm), flame retardant Cfl-S1

polypropylene, black | L 374 × W 374 × H 79 mm | 2.31 lbs





max. 3 adaptors on top of each other possible (total height w/floor panel max. 214 mm)

Cover plate


flame retardant Cfl-S1 for a strong connection




F 314 CFL S1.90

for connection of the floor panels in the middle of floor panel F 304 Cfl S1 (part of F 304 Cfl S1), strong press fit, flame retardant Cfl-S1

polypropylene, grey | L 89 \times W 89 \times H 19 mm | 0.088 lbs





7 for a stronger connection between the panels as F 106 Cfl S1

Cover plate


flame retardant Cfl-S1 for cable outlet




F 106 CFL S1.90

to cover the cable outlets in floor panel F 304 Cfl S1, flame retardant Cfl-S1 $\,$

polypropylene, black | L 89 \times W 89 \times H 19 mm | 0.088 lbs





Cover plate


flame retardant Cfl-S1 for cable outlet




F 107 CFL S1.90

to cover half a cable outlet in floor panel F 304 Cfl S1, flame retardant Cfl-S1 $\,$

polypropylene, black | L 89 \times W 44 \times H 19 mm | 0.044 lbs






Spacer


flame retardant Cfl-S1 for skirting extrusion



F 313 CFL S1.90

to be used with floor panel F 304 Cfl S1 and height adaptor F 312 Cfl S1, for mounting of skirting extrusion, flame retardant Cfl-S1 polypropylene | L 74 \times W 45 \times H 28 mm | 0.062 lbs






Accessories

Skirting extrusion


for floor panel F 304 Cfl S1 L 5000 × W 40 × H 40 mm




SO 400.01

to cover the outer edges of the floor panels F 304 Cfl S1, cut the extrusion for individual length, countersunk drill every 340 mm for woodscrews 4 mm dia.

aluminium | L 5000 × W 40 × H 40 mm | 4.762 lbs





Skirting extrusion


Miter 45°, left for floor panel F 304 Cfl S1




SO 410/L.01

1 × skirting extrusion made of SO 400, to cover the edges of the floor panel F 304 Cfl St, incl. 5×10^{-5} countersunk drill for woodscrews 4 mm dia., 45° miter cut on the left side

aluminium | L 1502 × W 40 × H 40 mm | 1.431 lbs





Skirting extrusion


Miter 45°, right for floor panel F 304 Cfl S1




SO 410/R.01

1 × skirting extrusion made of SO 400, to cover the edges of the floor panel F 304 Cfl S1, incl. 5 × countersunk drill for woodscrews 4 mm dia., 45° miter cut on the right side

aluminium | L 1502 × W 40 × H 40 mm | 1.431 lbs





Skirting extrusion


for LED-module L 5000 × W 55 × H 42 mm




SO 630.01

for use with floor panel F 304 Cfl S1, every 500 mm countersunk holes for screws 4 mm dia., if required, LED strip lighting can be mounted

aluminium | L 5000 × W 55 × H 42 mm | 7.055 lbs





Skirting extrusion


Miter 45°, left for LED-module



SO 630/L.01

1 × skirting extrusion made of SO 630, for use with floor panel F 304 Cfl S1, every 500 mm countersunk holes for screws 4 mm dia., if required, LED strip lighting can be mounted, 45° miter cut on the left side

aluminium | L 1557 × W 55 × H 42 mm | 2.2 lbs





Accessories

Skirting extrusion


Miter 45°, richt for LED-module




SO 630/R.01

 $1\times$ skirting extrusion made of SO 630, for use with floor panel F 304 Cfl S1, every 500 mm countersunk holes for screws 4 mm dia., if required, LED strip lighting can be mounted, 45° miter cut on the right side

aluminium | L 1557 × W 55 × H 42 mm | 2.2 lbs





Floor edging


for floor panel F 304 Cfl S1 L 5000 × W 108 × H 40 mm




SO 620.01

for use with floor panel F 304 Cfl S1, every 500 mm countersunk holes for screws 4 mm dia.

aluminium | L 5000 × W 108 × H 40 mm | 13.492 lbs






Floor edging


Miter 45°, left for floor panel F 304 Cfl S1



 $1\times$ floor edging made of SO 620, for use with floor panel F 304 Cfl S1, every 500 mm countersunk holes for screws 4 mm dia., $45^{\rm o}$ miter cut on the left side

aluminium | L 1577 × W 108 × H 40 mm | 4.497 lbs






Floor edging


Miter 45°, right for floor panel F 304 Cfl S1

SO 620/R.01

1 × floor edging made of SO 620, for use with floor panel F 304 Cfl S1, every 500 mm countersunk holes for screws 4 mm dia., $45^{\rm o}$ miter cut on the right side

aluminium | L 1577 × W 108 × H 40 mm | 4.497 lbs





Floor covering extr.


for slope edge tiles L 3150 × W 101 × H 4 mm




SO 640.00

to be used with slope floor tiles F 309 Cfl S1 and F 315 Cfl S1, without countersunk holes for screws 4 mm dia.

aluminium | L 3150 \times W 101 \times H 4 mm | 12.081 lbs





Accessories


Floor covering extr.


Miter 45°, left for slope edge tiles

SO 640/L.00

 $1\times$ floor edging made of SO 640, for use with floor panel slope floor tiles F 309 Cfl S1 and F 315 Cfl S1, without countersunk holes for screws 4 mm dia., 45° miter cut on the left side

aluminium | L 1500 × W 101 × H 4 mm | 3.552 lbs






Floor covering extr.


Miter 45°, right for slope edge tiles

SO 640/R.00

1 \times floor edging made of SO 640, for use with floor panel slope floor tiles F 309 Cfl S1 and F 315 Cfl S1, without countersunk holes for screws 4 mm dia., 45° miter cut on the right side

aluminium | L 1500 \times W 101 \times H 4 mm | 3.552 lbs





Knuckle


for SO 640 L 30 × W 30 × H 2 mm




SO 641.01

to be used with skirting extrusion SO 640, for reinforcement of corner connection

aluminium | L 30 \times W 30 \times H 2 mm | 0.009 lbs





Skirting extrusion


for F 315 for laminate




SO 642.01

Laminate skirting to be used with slope floor tile F 315 Cfl S1, 5000 mm long

aluminium | 5000 mm long | 5.291 lbs





Tools

Tool set

small L 175 × W 27 × H 45 mm



F 1.37

to remove the cover plate F 106 Cfl S1 from floor panel F 304 Cfl S1 plastic/steel | L 175 \times W 27 \times H 45 mm | 0.238 lbs



Tool set


big L 35 × W 240 × H 950 mm



F 2.44

to remove the cover plates F 106 Cfl S1 from floor panel F 304 Cfl S1 while standing

stainless steel | L 35 × W 240 × H 950 mm | 2.178 lbs



■ Attention: do not use for cover plate F 314 Cfl S1

Tape

double-sided 50 meter roll



TP 1.90

for fixing carpets on phenol coated panels SP 30 / SP 13 / SP 12 / SP 50 / SP 60, layers on both sides with rubber adhesive, 50 m long

rayon | W 50 × H 1 mm | 0.441 lbs

Sets

Set


flame retardant Cfl-S1 25 m² Set



ECO25 CFL S1.90

Set consisting of: $25 \times$ base plate F 304 Cfl S1 (1 m²), $66 \times$ cover plate F 106 Cfl S1 (89 × 89 × 19 mm), $36 \times$ cover plate F 107 Cfl S1 (89 × 44 × 19 mm), 1 x tool F 1 for cover plate, flame retardant Cfl-S1, Delivery in reusable permanent packaging: Pallet with pallet support frame

polypropylen/wood | L 1080 \times W 1080 \times H 1379 mm | 755.944 lbs



Set

flame retardant Cfl-S1 25 LM Slope edge elements



SLO25 CFL S1.90

Set consisting of: 25 LM slope edge elements straight: 42 × slope edge tile F 315 Cfl S1 and 4 LM slope edge corner tiles: 4 × slope edge corner tile F309 Cfl S1, flame retardant Cfl-S1, delivery in reusable permanent packaging: pallet with mounting frame

polypropylen/wood | L 1080 × W 1080 × H 779 mm | 374.782 lbs





7 Additional Parts


Overview





7 Additional Parts

Overview

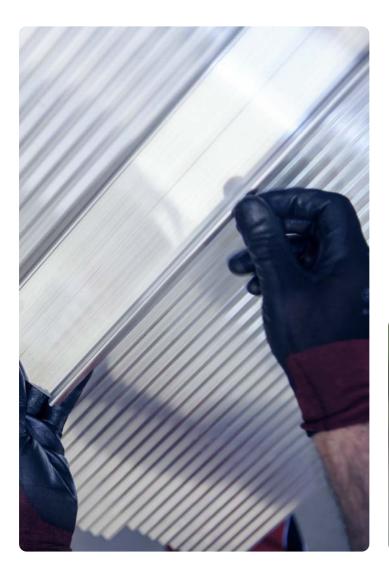





magnetic fixing System

Product presentation with a system.




Index

₹ TECHNICAL FEATURES	530
尽 OVERVIEW	532
对 COMPONENTS	
→ Basic parts	533
→ Accessories	534
⊿ Tools	536





Technical features

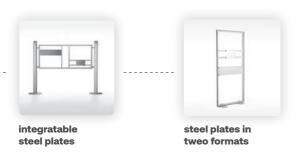







up to 5 kg load capacity



Fabric cladding

Flexible and stable.

The great advantage of our system is the versatile magnetic holder (holds up to 5 kg), which allows flexible use for different holders, shelves and brochure pockets. Then there is the proven fabric tensioning frame technology with reinforcement options for larger formats and double-sided use. The sturdy base and steel panels offer freedom of choice when positioning the magnetic holders.

The perfect combination of fabric and magnet.

Another highlight: thanks to silicone edge technology, fabric graphics can be changed quickly and easily, making it easy to redesign the product presentation. This makes the system ideal as a freestanding display and as a decorative solution for store fittings.

MF 1

Overview

Basic parts MF 100 MF 105 MF 80 MF 15 Accessories MF 125 G MF 125 G MF 125 P Tools

MF 150 P

MF 226 S

MF 21

Basic parts

Magnet fixing beam


with 2 × Z 308 for W 442/E




MF 100.90

for frame element W 442/E, incl. steel plate 300 mm MF 80, with 2 \times beam Z 308 (32 \times 16 mm)

steel/aluminium | L 870 \times W 30 \times H 200 mm | 4.678 lbs





Magnet fixing beam


with 2 × Z 308 for W 442/E



MF 105.90

for frame element W 442/E, incl. steel plate 719 mm MF 82, with 2 \times beam Z 308 (32 \times 16 mm)

steel/aluminium | L 870 × W 30 × H 200 mm | 8.296 lbs






Steel plate


for 16 mm beam L 300 × W 16 × H 200 mm



MF 80.37

for use with 2 × beams with 16 mm depth steel, 2 mm thick | L 300 × W 16 × H 200 mm | 2.606 lbs





Magnet retainer

max. 5 kg/200 mm L 59 × W 17 × H 133 mm



MF 15.90

with receiving slot for hook-in systems, with 15 \times round magnet on the back for positioning on wall elements with fabric covered steel panels, non-slipping guaranteed for up to 5 kg distributed load

plastic, slate grey RAL 7015 | L 59 × W 17 × H 133 mm | 0.518 lbs



■ max projection 200 mm, distributed load max. 5 kg

Accessories

Bracket


straight for MF 12/MF 15



MF 306 S.41

for hooking into magnetic retainer MF 12, MF 15, for 8 mm glass and wooden shelves $\,$

steel, chrome plated | L $110 \times W$ 92 \times H 83 mm | 0.485 lbs



■ max. projection 200 mm

Shelf

glass, 8 mm for MF 306 S



MF 125 G.51

glass, 8 mm, for bracket MF 306 S acrylic glass transparent | L 250 \times W 125 \times H 8 mm | 0.661 lbs



Shelf

glass, 8 mm for MF 306 S



MF 150 G.51

glass, 8 mm, for bracket MF 306 S acrylic glass transparent | L 300 \times W 150 \times H 8 mm | 0.926 lbs



Shelf

Wood, 8 mm for MF 306 S



MF 125 P.30

wood, 8 mm, for bracket MF 306 S wood, white | L 250 \times W 125 \times H 8 mm | 0.511 lbs



Shelf

Wood, 8 mm for MF 306 S



MF 150 P.30

Wood, 8 mm, for bracket MF 306 S wood, white | L 300 \times W 150 \times H 8 mm | 0.739 lbs



Accessories


Hanging arm

projection 200 mm for MF 12/MF 15



MF 226 S.41

hooking into magnetic retainer MF 12, MF 15, projection 200 mm steel, chrome plated | L 210 \times W 40 \times H 85 mm | 0.278 lbs



Magnet hook


projection 80 mm max. 0.3 kg/80 mm



MF 21.41

with 2 \times rectangular magnet on the back for positioning on wall elements with fabric covered steel panels, non-slipping guaranteed for up to 0.3 kg distributed load

steel, chrome plated | L 80 \times W 55 \times H 28 mm | 0.11 lbs



nax projection 80 mm, distributed load max. 0,3 kg


Tools

Tool set assembly for MF 4/MF 12/MF 15




MF 1.90

for easier assembly of magnetic retainer MF 4, MF 12, MF 15 steel/plastic, rubber | L 119 \times W 40 \times H 83 mm | 0.463 lbs



additional extrusions for glass/wood/doors etc.

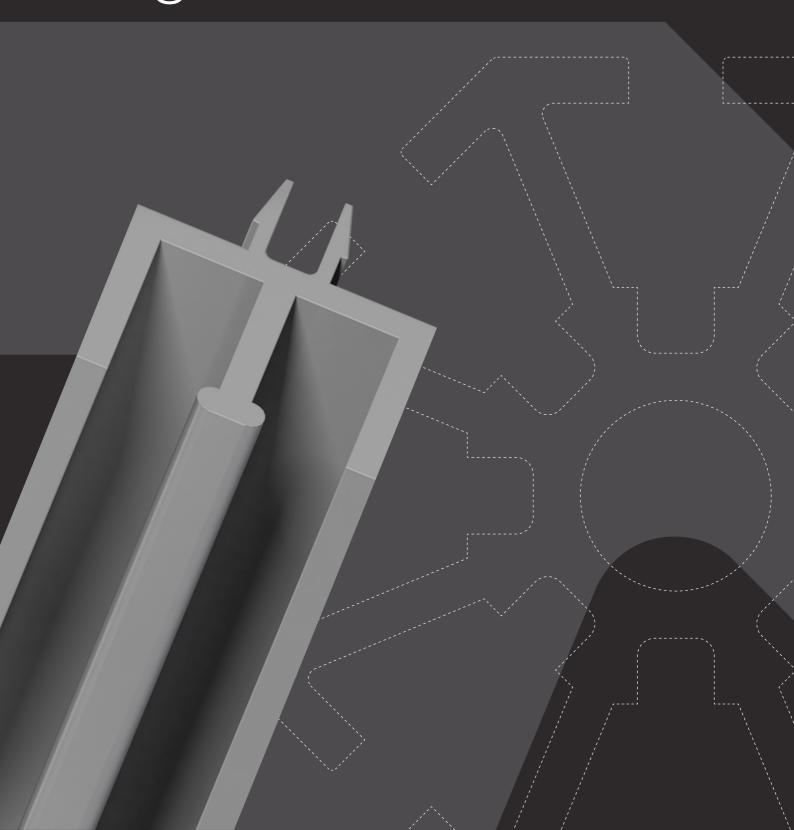


₹ additional extrusions

Index

对 OVERVIEW	540	
₹ COMPONENTS		
↗ Panel/Glass	541	
⊿ Doors	543	

7 additional extrusions

Overview

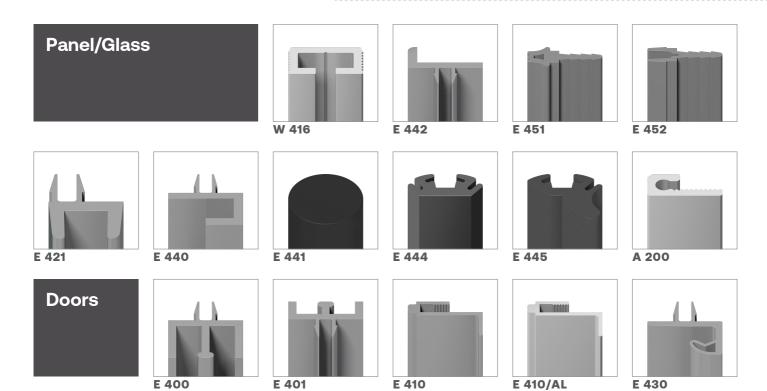

₹ additional extrusions

Panel/Glass

Insert extrusion


1 system groove for wooden panels



W 416.01

for wooden panels, with 1 system groove 4.3 mm aluminium | L 5000 \times W 16 \times H 10 mm | 2.315 lbs





Supporting edge


L 5000 × W 16 × H 8 mm 5000 mm long



E 442.30 | .35

plastic, semi-hard | L 5000 \times W 16 \times H 8 mm | 0.882 lbs





Extrusion connector


for wooden panels >13 mm L 5000 × W 7 × H 6 mm



E 451.35

for wooden panels from 13 mm up, used for extrusions with system groove depth of at least 7.5 mm plastic, semi-hard | L 5000 \times W 7 \times H 6 mm | 0.772 lbs





Extrusion connector

for wooden panels >13 mm L 5000 × W 5 × H 7 mm



E 452.35

for wooden panels from 13 mm up, to clip into system groove plastic, semi-hard | L 5000 \times W 5 \times H 7 mm | 0.507 lbs



Glass panel retainer

for glass 6 mm L 5000 × W 11 × H 8 mm



E 421.33 | .35

for 6 mm glass panels plastic, semi-hard | L 5000 \times W 11 \times H 8 mm | 0.904 lbs



₹ additional extrusions

Panel/Glass

Glass panel retainer


for E 441 L 5000 × W 16 × H 10 mm



E 440.30 | .35

also useable as door stopper extrusion in combination with E 441 plastic, semi-hard | L 5000 \times W 16 \times H 10 mm | 1.036 lbs





Rubber sponge

50 m long for E 440




E 441.35

for use with E 440 only, for glass support and door stop, 50 m long $\,$

rubber | L 50000 × W 16 × H 10 mm | 2.205 lbs





Anti rattle


for glazing for glass 4 mm



E 444.33

for mounting glass in the system groove, glass thickness 4 mm, insertable in all hollow chambers from 5.4 x 12 mm rubber | L 50000 x W 13 x H 6 mm | 4.449 lbs





Anti rattle

50 m long for glass 4 mm



E 445.33

for mounting glass in the system groove, glass thickness 4 mm, insertable in extrusions S 1129 / S 1303 / S 1310, 50 m long

rubber | L 50000 × W 12 × H 6 mm | 7.716 lbs



Protection extrusion


L 5000 × W 15 × H 6 mm 5000 mm long



A 200.01

aluminium | L 5000 × W 15 × H 6 mm | 1.334 lbs





7 additional extrusions

Doors

Sliding door extrusion

top for panels 4 mm



E 400.30 | .33 | .35

upper track, for panels 4 mm $\,$ plastic, hard $\,$ | L 5000 \times W 16 \times H 12 mm $\,$ | 1.323 lbs





Sliding door extrusion

bottom for panels 4 mm



E 401.30 | .33 | .35

lower track, for panels 4 mm plastic, hard | L 5000 \times W 16 \times H 6 mm | 0.992 lbs






Door handle extrusion


for sliding door for panels 4 mm



E 410.35

for sliding door, for panels 4 mm plastic, hard | L 5000 \times W 24 \times H 7 mm | 1.102 lbs






Door handle extrusion


for sliding door L 5000 × W 24 × H 7 mm



E 410/AL.01

for sliding door, for panels 4 mm aluminium | L 5000 \times W 24 \times H 7 mm | 2.646 lbs





Door stopping extrusion


for hinged doors for glass and wood




E 430.30 | .35

with soft rubber lip insert for hinged wooden or glass doors plastic, semi-hard | L 5000 \times W 16 \times H 10 mm | 0.816 lbs





additional accessories screws/holders etc.

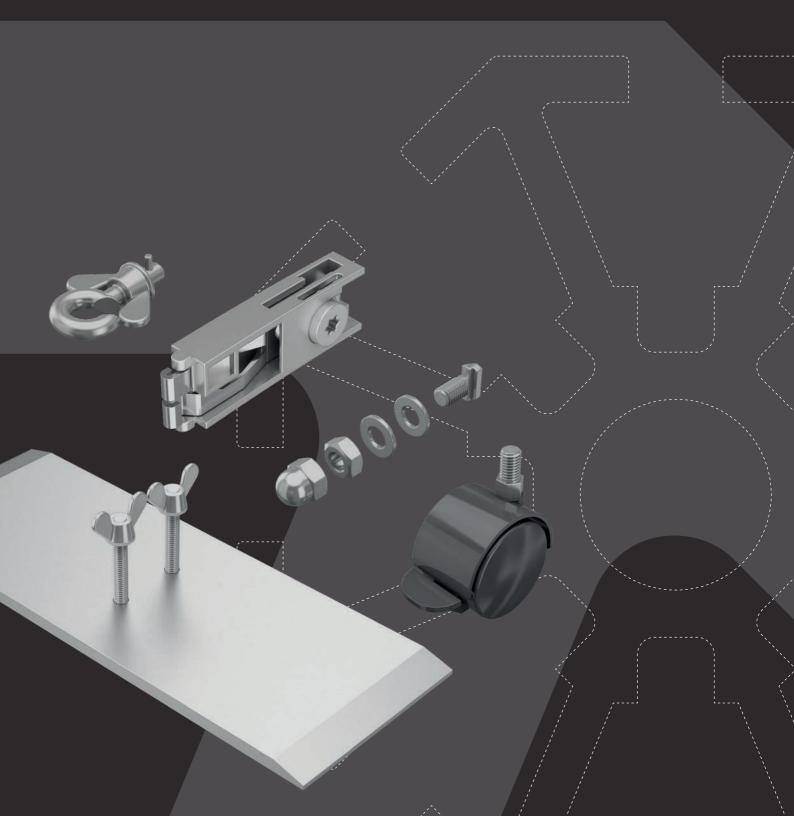

Index

7 OVERVIEW	546
7 COMPONENTS	
→ Base plates/Castors → Base plates/Cas	548
⁷ Holder	550
7 Doors	552
⊿ Hinges	553
7 Connectors	554
7 Tension locks	556
7 Screws	558

Overview

Base plates/Castors



M 1398



M 1347



M 1357



M 1347/SK



S 745



S 746



S 748





E 277



E 275



M 1582



M 1369



M 1077



E 245



M 1488



E 306



E 307/L



E 307/R





Z 964B



Z 966B/V





E 702





M 1079



S 1154



E 261



E 262



E 263



Z 940



Z 942





Tension locks



Z 951/8





Z 961/8



Z 961/13

Overview



Base plates/Castors


Base plate

for M 1307 L 320 × W 120 × H 8 mm



M 1398.21

for frames made out of M 1307, with screw set M 1347/SK steel | L 320 \times W 120 \times H 8 mm | 5.32 lbs




Base plate

for M 1307 L 320 × W 120 × H 8 mm



M 1347.21

for frames made out of M 1307, without screw-set steel | L 320 \times W 120 \times H 8 mm | 5.154 lbs

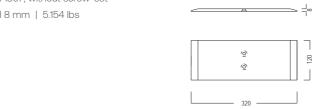


Base plate


for M 1307 L 320 × W 300 × H 8 mm



M 1357.21

for small frames made of M 1307, without screw set steel | L 320 \times W 300 \times H 8 mm | 12.842 lbs





Fixing set

for M 1357 / M 1347 L 61 × W 32 × H 17 mm




M 1347/SK.90

accessory for base plate M 1357 / M 1347, suitable for tension fabric extrusion M 1307 $\,$

steel | L 61 × W 32 × H 17 mm | 0.165 lbs






Castor

max 55 kg L 52 × W 46 × H 78 mm



S 745.33

mounting height 63 mm plastic | L 52 \times W 46 \times H 78 mm | 0.181 lbs

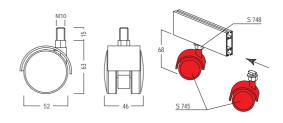

■ maximum dead load: 55 kg

Base plates/Castors


Castor

with brake max 55 kg



S 746.33

same as S 745, but with brake, mounting height 63 mm plastic | L 52 \times W 46 \times H 78 mm | 0.185 lbs

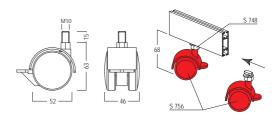


→ maximum dead load: 55 kg


Bolt for castor wheels for \$ 745/\$ 746 L 48 × W 20 × H 20 mm



S 748.37

for mounting of castors S 745 / S 746 to system groove 4.3 mm steel | L 48 \times W 20 \times H 20 mm | 0.079 lbs





Holder


Brochure shelf

45° for DIN A4



E 277.21

for size DIN A4, 45°, edge height 50 mm, incl. mounting parts M8 steel, 4 mm $\,$ | L 0 x B 140 x H 330 mm $\,$ | 1.215 lbs



■ maximum load 2.5 kg

Bag holder


max. 15 kg for system groove



E 275.38

for system groove 4.3 mm, with black plastic ball head, maximum load 15 \mbox{kg}

steel | L 70 x B 0 x H 0 mm | 0.121 lbs

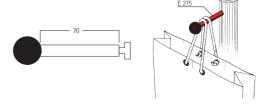

maximum load 15 kg

Front suspension bar


max. 15 kg for system groove 4.3 mm



M 1582.21

for mounting to system groove 4.3 mm, incl. 1 × hammerhead bolt M 1142 and 1 × set screw E 111/6*6 (M6)

steel | L 276 × W 25 × H 25 mm | 0.851 lbs

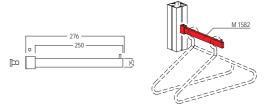

■ Attention: maximum load 15 kg


Fixing set

for banner L 140 × W 80 × H 20 mm



M 1369.37

for mounting to system groove 4.3 mm steel | L 140 \times W 80 \times H 20 mm | 0.084 lbs

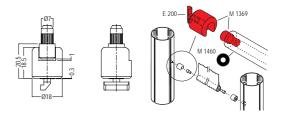


Fixing angle


L 40 × W 30 × H 20 mm



M 1077.37

incl. hammerhead screw M 1470 steel | L 40 \times W 30 \times H 20 mm | 0.093 lbs





Holder

Clip

for cables L 16 × W 12 × H 4 mm



E 245.30

for system groove 4.3 mm, for cables plastic | L 16 \times W 12 \times H 4 mm |



Clip


for cables L 36 × W 25 × H 15 mm




M 1488.35

electric cables can be fixed plastic | L 36 \times W 25 \times H 15 mm | 0.007 lbs







Doors


Door hinge


for system groove L 80 × W 94 × H 5 mm



E 306.01

for system groove, incl. 4 \times countersunk screw E 2720/20 (M4) aluminium | L 80 \times W 94 \times H 5 mm | 0.254 lbs






Door hinge


left L 80 × W 80 × H 5 mm



E 307/L.01

left hand version, can be unhinged, for mounting to system groove 4.3 mm, incl. 4 × countersunk screw E 2720/20 (M4) aluminium | L 80 × W 80 × H 5 mm | 0.254 lbs






Door hinge


L 80 × W 80 × H 5 mm



E 307/R.01

right hand version, can be unhinged, for mounting to system groove 4.3 mm, incl. 4 \times countersunk screw E 2720/20 (M4) aluminium | L 80 \times W 80 \times H 5 mm | 0.254 lbs






Hinges

Internal corner connector | Z 964B.00

22.5° - 337.5° lock chamber 21 × 12 mm



for extrusions with lock chamber 21 × 12 mm, adjustable from 22.5° to 337.5°, incl. 2 × countersunk screw E 111 and E 111/20 each zinc die cast | L 87 \times W 21 \times H 12 mm | 0.24 lbs





Internal corner connector | Z 966B/V.00

22.5° - 337.5° lock chamber 21 × 12 mm



for extrusions with lock chamber 21 x 12 mm, adjustable from 22.5° to 337.5°, incl. 2 × countersunk screw E 111 and E 111/20 zinc die cast | L 118 × W 85 × H 12 mm | 0.287 lbs





Connectors


Connector part

70 mm lang



E 702.01

for all shelf brackets with tension lock Z 961/13, incl. 2 × hammerhead screw E 202 with sleeve E 210/Hü aluminium | L 70 x B 12 x H 0 mm | 0.093 lbs






Connector part


with 2 × M 1089 for extrusions 80 mm



M 1079.01

made of extrusion M 1063, for mounting to square extrusions 80 mm, with 2 \times slot 16 \times 26 mm, incl. 2 \times fixing set M 1089 aluminium | L 80 \times W 10 \times H 200 mm | 0.686 lbs






Clip


for extrusions L 15 × W 14 × H 6 mm



S 1154.44

for connection of 2 aluminium extrusions placed side by side stainless steel | L 15 \times W 14 \times H 6 mm | 0.004 lbs





Connecting clamp

conical groove depth 10 mm



E 261.00

conical, for longitudinal connection from system slot to system slot aluminium | L 50 \times W 16 \times H 10 mm | 0.037 lbs





→ at least one groove must be 10 mm deep

Connecting clamp


groove depth 7.5 mm L 60 × W 12 × H 6 mm




E 262.37

for longitudinal connection from system slot to system slot, for groove depth 7.5 $\mbox{\sc mm}$

steel | L 60 \times W 12 \times H 6 mm | 0.053 lbs





Connectors

Connecting clamp


groove depth 7.5 mm L 41 × W 12 × H 10 mm




E 263.00

for longitudinal connection of 2 system grooves, groove depth 7.5 mm

steel | L 41 × W 12 × H 10 mm | 0.033 lbs





Clamping element


lock chamber 21 × 12 mm L 50 × W 10 × H 20 mm




Z 940.37

for all beam extrusions with lock chambers 21 \times 12 mm, operating through system groove

steel | L 50 × W 10 × H 20 mm | 0.196 lbs





Clamping element


variable in angle max. 15° for lock chamber 21 × 12 mm



Z 942.37

for all beam extrusions with lock chamber 21 × 12 mm, variable in angle, max. 15 $^{\rm o}$

steel | L 40 \times W 11 \times H 20 mm | 0.146 lbs

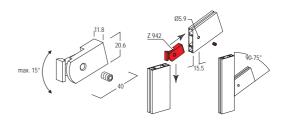

Clamping element


variable in angle max. 15° for lock chamber 21 × 12 mm



Z 943.37

for all extrusions with lock chamber 21 × 12 mm, variable in angle, max .15 $^{\rm o}$

steel/plastic | L 46 \times W 11 \times H 20 mm | 0.161 lbs

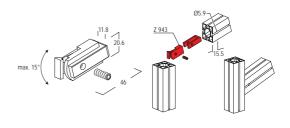

Tension locks

Tension lock

key hole aperture lock chamber 21 × 12 mm



Z 951/8.00

8 mm, for all upright-, round- and square extrusions with lock chamber 21 \times 12 mm and $\,$ key hole aperture

zinc die cast/steel | L 70 \times W 21 \times H 12 mm | 0.119 lbs





Tension lock


key hole aperture lock chamber 21 × 12 mm



Z 951/13.00

13 mm, for all beam extrusions with lock chamber 21 \times 12 mm and key hole aperture, L 70 \times W 21 \times H 12 mm

zinc die cast/steel | L 70 × W 21 × H 12 mm | 0.115 lbs

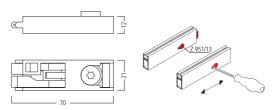

Tension lock


8 mm L 70 × W 20 × H 12 mm



Z 961/8.00

8 mm, for all beam extrusions with cross- or T-lock chamber 21 \times 12 mm

zinc die cast/steel | L 70 \times W 20 \times H 12 mm | 0.119 lbs





Tension lock


13 mm L 70 × W 21 × H 13 mm



Z 961/13.00

13 mm, for all beam extrusions with lock chamber 21 \times 12 mm as well as in conjunction with adaptor Z 161/A, for beam extrusions with lock chamber 39 \times 12 mm

zinc die cast/steel | L 70 × W 21 × H 13 mm | 0.115 lbs

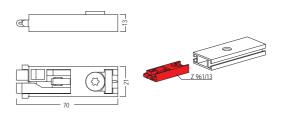


Curved beam tension lock Z 962/8.00

8 mm for curved extrusions



8 mm, for all curved upright, round and square extrusions with lock chamber 21 $\!\times$ 12 mm

zinc die cast/steel | L 70 × W 21 × H 12 mm | 0.115 lbs





Tension locks


Curved beam tension lock Z 962/13.00

13 mm for curved extrusions



13 mm, for curved extrusions, for all curved beam extrusions with lock chamber 21 × 12 mm, as well as in conjunction with adaptor Z 161/A for beam extrusions with lock chamber 39 × 12 mm

zinc die cast/steel | L 70 × W 23 × H 13 mm | 0.115 lbs

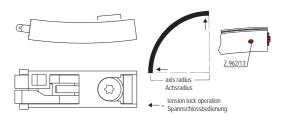

Reinforcing plate


for groove depth 7.5 mm for Z 961/13



E 212.37

to support the tension lock Z 961/13, for groove depth 7.5 mm, incl. 2 \times set screw E 212/Z (M4)

steel | L 40 × W 10 × H 3 mm | 0.022 lbs





Reinforcing plate

for groove depth 10 mm for Z 961/13



E 213.37

to support the tension lock Z 961/13, for groove depth 10 mm, incl. 2 \times set screw $\,$ E 213/Z (M4)

steel | L 40 \times W 10 \times H 12 mm | 0.022 lbs



Screws

Hammerhead screw


combination cross-slot max. 35 kg



E 203.38

for system groove 4.3 mm, sleeve E 209/Hü, with combination cross recess

steel | L 30 × W 8 × H 8 mm | 0.024 lbs



→ maximum load capacity 35 kg

Hammerhead screw


combination cross-slot L 30 × W 15 × H 8 mm



E 209.38

for system groove 4.3 mm, sleeve E 209/Hü, with combination cross-slot

steel | L 30 × W 15 × H 8 mm | 0.026 lbs



■ Attention: maximum load capacity 35 kg

Hammerhead screw


combination cross-slot max. 35 kg



E 210.38

for system groove 4.3 mm, sleeve E 210/Hü with combination cross-slot

steel | L 19 \times W 15 \times H 8 mm | 0.015 lbs



■ maximum load capacity 35 kg

Hammerhead screw

L 19 × W 8 × H 8 mm



E 206.37

steel | L 19 \times W 8 \times H 8 mm | 0.02 lbs



Hammerhead screw elongated slot / allen screw max. 35 kg




E 205.38

for system groove 4.3 mm, sleeve E 204, 10 mm dia., elongated slot and allen screw 4 mm, incl. plastic ring E 201 steel | L 19 \times W 15 \times H 10 mm | 0.026 lbs







→ maximum load capacity 35 kg

Screws

Hammerhead screw


hexagon socket 4 mm for glass shelf



E 210/M8.30 | .35

for glass shelf, for system groove 4.3 mm, with threaded sleeve M8, hexagon socket 4 mm and plastic sleeve steel/plastic | L $16 \times W 15 \times H 9 \text{ mm}$ | 0.013 lbs





→ maximum load capacity 35 kg

Hammerhead screw

M10 L 22 × W 10 × H 10 mm




E 265.37

for system groove 4.3 mm steel | L 22 \times W 10 \times H 10 mm | 0.026 lbs







Hammerhead screw

M8×19 mm L 19 × W 20 × H 8 mm



M 1472.37

for system groove 4.3 mm steel | L 19 × W 20 × H 8 mm | 0.053 lbs







Hammerhead screw

M8×24 mm L 24 × W 20 × H 8 mm



M 1473.37

for system groove 4.3 mm steel | L 24 \times W 20 \times H 8 mm | 0.055 lbs







Hammerhead screw

M10×23 mm L 23 × W 20 × H 10 mm



M 812.37

for system groove 4.3 mm, M10×23 mm steel | L 23 × W 20 × H 10 mm | 0.09 lbs







Screws


Screw hook


max. 8 kg L 27 × W 20 × H 11 mm



E 219.37

with plastic washer for system groove 4.3 mm steel | L 27 \times W 20 \times H 11 mm | 0.013 lbs





→ maximum load 8 kg

Screw eye




E 218.41

for system groove 4.3 mm, opening 12.3 mm dia., with 1 × hammerhead screw E 218/1 (M5) and 1 × eye nut steel | L 28 × W 22 × H 12 mm | 0.029 lbs



maximum load capacity 45 kg

tools Processing/mounting

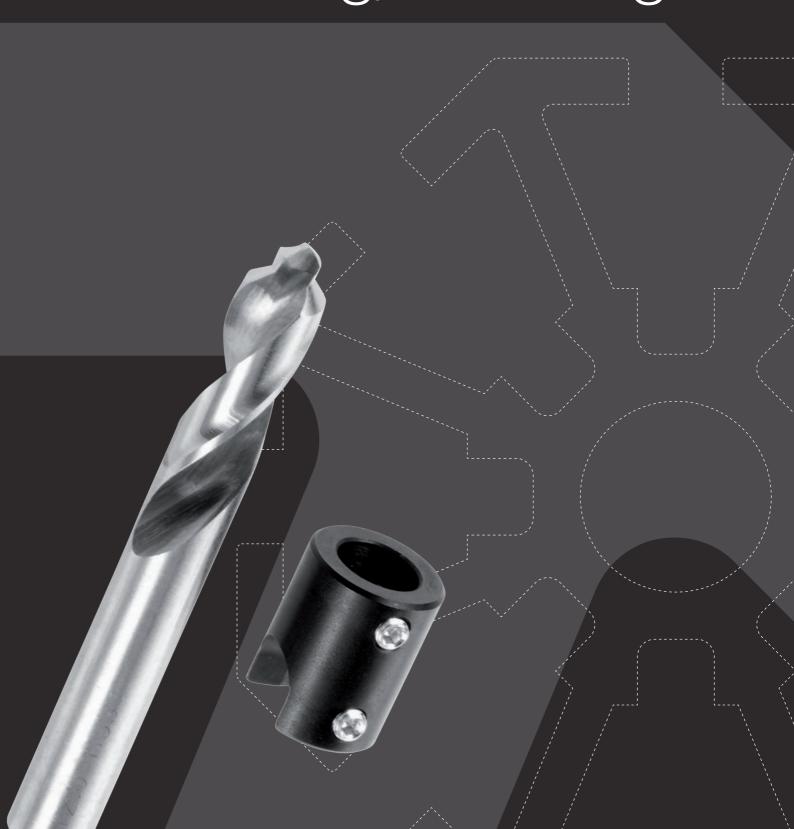

Index

OVERVIEW
OMPONENTS
Pneumatic press
Drilling jigs
Drills/Accessories
Screwdriver

Overview

Pneumatic press















































































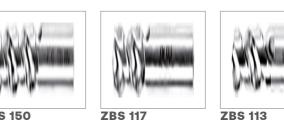










Overview

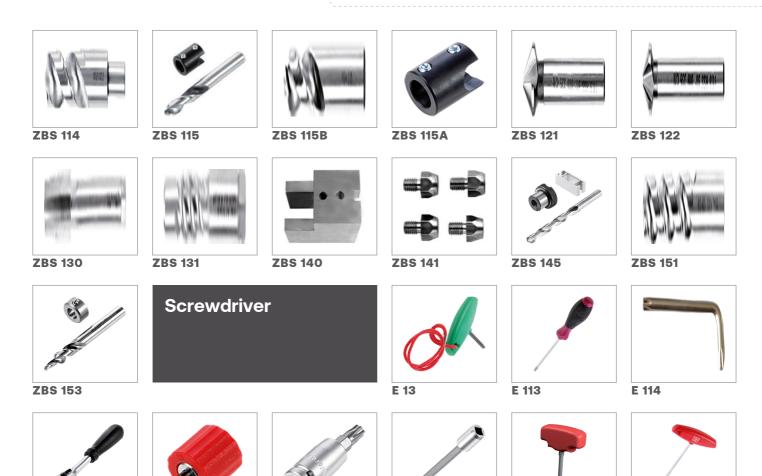

M 945

M 951

M 952

E 115

E 116

E 116/42

Pneumatic press

Pneumatic press

13 mm system hole L 420 × W 510 × H 780 mm



PS-0.90

for 13 mm system hole, operating pressure 6-10 bar, compressed air connection 3/8' (= 6 mm), air consumption 6 bar = 0.44 l, 10 bar = 0.70 l, accessory: WPS 1, screws, cover set, punching die with base plate, compressed air connection and foot release with ZPS 107 for different extrusion thicknesses, to attach to punching sides A and B

steel | L 420 × W 510 × H 780 mm | 87.082 lbs

Interchangeable tool

for 13 mm system hole L 190 × W 78 × H 87 mm



WPS 1.90

interchangeable tool with die plate and hole punch for 13 mm system hole in beam extrusions with large and small lock hollow section

steel | L 190 × W 78 × H 87 mm | 10.494 lbs

Interchangeable tool

for 8 mm system hole



WPS 2.90

interchangeable tool with die plate and hole punch for 8 mm system hole and subsequent countersinking, for installation of corner connectors using countersunk screws E 111/m in extrusions with 14 mm square hollow chamber

steel | - | 10.803 lbs

Interchangeable tool

for 8 mm system hole L 190 × W 77 × H 86 mm



WPS 5.90

interchangeable tool with die plate and hole punch for 8 mm system hole in upright extrusion

steel | L 190 \times W 77 \times H 86 mm | 9.414 lbs

Foot pedal for PS-0



ZPS 100.90

for pneumatic press PS-0 steel | L 180 \times W 80 \times H 86 mm | 1.51 lbs

Pneumatic press

Replacement die plate

21/13 mm for WPS 1



ZPS 101.90

21/13 mm, for interchangeable tool WPS 1, suitable for small tension lock chamber $\,$

steel | L 115 \times W 21 \times H 12 mm | 0.408 lbs

Replacement die plate

39/13 mm for WPS 1



ZPS 102.90

 $39/\!13$ mm, for interchangeable tool WPS 1, suitable for large tension lock chamber

steel | L 142 × W 50 × H 12 mm | 1.001 lbs

Hole punch

13 mm dia for WPS 1



ZPS 103.90

13 mm dia., for interchangeable tool WPS 1 steel | L 58 \times W 16 \times H 16 mm | 0.143 lbs

Hole punch

8 mm dia. for WPS 2



ZPS 105.90

8 mm dia., for interchangeable tool WPS 2 steel | L 47 \times W 11 \times H 11 mm | 0.051 lbs

Supporting block set

for PS-0 L 130 × W 100 × H 28 mm



ZPS 107.90

for pneumatic press PS-0, with fixing accessories nylon | L 130 \times W 100 \times H 28 mm | 1.19 lbs

Pneumatic press

Supporting block

for WPS 1 / punching side A W 18 × H 48 mm



ZPS 107/11.90

for interchangeable tool WPS 1 / punching side A, for all 16 mm beam extrusions, with fixing accessories $\,$

nylon | W 18 × H 48 mm | 0.064 lbs

Supporting block

for upright extrusion S 201 for WPS 1 / punching side B



ZPS 107/12.90

for interchangeable tool WPS 1 / punching side B, for upright extrusion S 201, with fixing accessories

| W 22 × H 36 mm | 0.064 lbs

Supporting block

für S 1310 / Z 2100 / Z 2105 for WPS 1 / punching side A



ZPS 107/13.90

for interchangeable tool WPS 1 / punching side A, for extrusions S 1310 / Z 2100 / Z 210, with fixing accessories

nylon | W 44 \times H 32 mm | 0.09 lbs

Supporting block

for 16 mm beam extrusions for WPS 1 / punching side B



ZPS 107/14.90

for interchangeable tool WPS 1 / punching side B, for all 16 mm beam extrusions, with fixing accessories

nylon | W 40 × H 48 mm | 0.17 lbs

Supporting block

for WPS 2 / punching side A W 20 × H 40 mm



ZPS 107/21.90

for interchangeable tool WPS 2 / punching side A, for extrusions S 1100 / S 1105 / S 1125 / S 130, with fixing accessories

nylon | W 20 \times H 40 mm | 0.06 lbs

Pneumatic press

Supporting block

for WPS 2 / punching side B W 55 x H 40 mm



ZPS 107/22.90

for interchangeable tool WPS 2 / punching side B, for extrusions S 1100 / S 1105 / S 1125 / S 130, with fixing accessories nylon | W 55 \times H 40 mm | 0.198 lbs

Supporting block

for S 108 / S 201 / S 208 for WPS 5 / punching side A



ZPS 107/51.90

for interchangeable tool WPS 5 / punching side A, for upright extrusions S 108 / S 201 / S 20, with fixing accessories nylon | W 46 \times H 52 mm | 0.154 lbs

Supporting block

for S 1310 / Z 2105 for WPS 6 / punching side A



ZPS 107/61.90

for WPS 6 / punching side A, for S 1310 / Z 2105, with fixing accessories

nylon | W 46 × H 49 mm | 0.172 lbs

Drilling jigs

Drilling

8/12 mm drilling L 135 × W 40 × H 84 mm



BS 4.90

for 8 mm system hole, for installation of tension lock Z 961/8 in 40 mm and 80 mm square extrusions: WP 860 / M 1025 / M 1091 / M 1018 (see BS 4 ZS 1) included in delivery: drill bush ZBS 100, Ø 8 mm, distance block ZBS 140, for 12 mm countersink – only for internal straight connector Z 967

steel/aluminium body | L 135 \times W 40 \times H 84 mm | 1.349 lbs

for 8 mm system hole: twist drill ZBS 112 to be ordered separately for 12 mm countersink: drill bush ZBS 104 and step drill ZBS 115 to be ordered separately

Drilling jig accessory


for BS4 L 66 × W 67 × H 16 mm



BS 4 ZS 1.90

for drilling jig BS4, for 8 mm system hole, extrusions: M 1025 / M 1091 / M 1018

steel/aluminium body | L 66 × W 67 × H 16 mm | 0.22 lbs



Drilling

10/13 mm drilling L 110 × W 40 × H 40 mm



BS 6.90

for 13 mm system hole: for installation of tension lock Z 961/13 in all 16 mm beams, included in delivery: drill bush ZBS 102, 13 mm dia. (large tension lock chamber), spacer pins ZBS 141 for extrusions Z 100 / Z 11, for 10 mm system hole: for installation of tension lock Z 960 in beams with 12 \times 21 mm lock chamber

steel/aluminium body | L 110 \times W 40 \times H 40 mm | 0.959 lbs

for 13 mm system hole: twist drill ZBS 114 to be ordered separately for 10 mm system hole: supplementary set ZBS 145 to be ordered separately

Drilling

12 mm countersink drilling L 180 x W 40 x H 75 mm



BS 8N.90

for installation of mitred connector Z 990/Z 965B/Z 964B/Z 966 and tension lock Z 963/L+R / Z 953/L+R, corner connector for W 906/M 1901/M 1915/M 1307,all 16 mm beams and 40 mm square extrusions, included in delivery: drill bush ZBS 104 \varnothing 12 mm, spacer pins ZBS 141 for extrusion Z 100/Z 110, distance block ZBS 140, beam distance piece for Z 953/L+R / Z 964 / Z 965 / Z 965B

steel/aluminium body | L 180 x W 40 x H 75 mm | 2.101 lbs

step drill ZBS 115 or optional twist drill ZBS 112 in combination with countersink ZBS 120 and drill guide bush ZBS 100 to be ordered separately

Drilling

8/10/12 mm drilling W 105 × H 85 mm



BS 31.90

with pressed-in drill bushes for 12/10/8 mm system hole, for installation of adaptor with tension lock M 1102, M 1104 in 120 mm square extrusions, included in delivery: twist drill ZBS 112, \emptyset 8 mm, step drill ZBS 115, \emptyset 12 mm/6.5 mm/90°, twist drill ZBS 151, \emptyset 10 mm for pin lock 10 mm

steel/aluminium body | W 105 × H 85 mm | 2.507 lbs

■ Attention: drilling tools have to be ordered separately: step drill ZBS 115B, Ø 12/6.5 mm, 90° depth stop ZBS 115A for step drill ZBS 115B

Drilling jigs

Drilling

8/10 mm drilling W 80 × H 40 mm



BS 33.90

with pressed-in drill bushes for 10/8 mm system hole, for installation of adaptor with tension lock M 1101 / M 1291 and adaptor for hinged end plates M 1281 in 80 mm round and square extrusions, included in delivery: twist drill ZBS 112, Ø 8 mm, step drill ZBS 153, Ø 10 mm/5.3 mm, 90°

steel/plastic | W 80 × H 40 mm | 0.489 lbs

Drilling

8/10 mm drilling L 105 × W 40 × H 26 mm



BS 34.90

with pressed-in drill bushes for 10/8 mm system hole, for installation of adaptor with tension lock M 1100 in 60 mm round and square extrusions, included in delivery: twist drill ZBS 112, \emptyset 8 mm, step drill ZBS 153, \emptyset 10 mm/5.3 mm, 90°

steel/plastic | L 105 × W 40 × H 26 mm | 0.531 lbs

Drilling

8/10 mm drilling L 140 × B 80 × H 50 mm



BS 35.90

with pressed-in drill bushes for 10/8 mm system hole, for installation of adaptor with tension lock M 1101 / M 1114 / M 1116 and base plate M 1406 in 80 mm square extrusions, included in delivery: twist drill ZBS 112, Ø 8 mm, step drill ZBS 153, Ø 10 mm/5.3 mm. 90°

steel/aluminium body | L 140 \times B 80 \times H 50 mm | 1.424 lbs

Drilling

8/10 mm drilling L 140 × W 80 × H 50 mm



BS 36.90

with pressed-in drill bushes for 10/8 mm system hole, for installation of adaptor with tension lock M 1103 in 80 mm square extrusions, included in delivery: twist drill ZBS 112, \varnothing 8 mm, step drill ZBS 153, \varnothing 10 mm/5.3 mm, 90°

steel/aluminium body | L 140 \times W 80 \times H 50 mm | 1.422 lbs

Drilling

for M 1935 L 180 × W 40 × H 75 mm



BS M1935.90

consisting of drilling jig similar to BS 8, but with tongue 16.05 \times 11.5 and 20.65 \times 8.5 (as extrusion M 1935 has two different chambers), 4 \times spacer pin ZBS 141.90, 2 \times drill bush Ø 12 mm ZBS 104.90, 1 \times cylinder screw M6 \times 6 DIN 17

steel | L 180 × W 40 × H 75 mm | 1.731 lbs

■ Step drill ZBS 115 to be ordered separately

Drills/Accessories

Drill guide bush 8 mm dia. for BS 4



ZBS 100.90

for drilling jig BS 4, 8 mm dia., exchangeable steel | L 36 \times W 32 \times H 32 mm | 0.212 lbs

Drill guide bush 13 mm dia. for BS 6



ZBS 102.90

for drilling jig BS 6, 13 mm dia., exchangeable steel | L $26 \times$ W $32 \times$ H 32 mm | 0.172 lbs

Drill guide bush 10 mm dia for BS 6 / ZBS 145



ZBS 103.90

for drilling jig BS 6 / supplementary set ZBS 145, 10 mm dia., as accessory in supplementary set ZBS 145, exchangeable steel | L 26 \times W 32 \times H 32 mm | 0.196 lbs

Drill guide bush 12 mm dia. for BS 8N



ZBS 104.90

for drilling jig BS 8N, 12 mm dia., in combination with step drill ZBS 115, exchangeable

steel | L 12 \times W 22 \times H 16 mm | 0.02 lbs

Twist drill 8 mm dia. for drilling jigs

ZBS 112.90

for drilling jig BS 4 / BS 31 / BS 33 / BS 34 / BS 35 / BS 36, Ø 8 mm, special machining tool for aluminium materials steel | L 91 × W 8 × H 8 mm | 0.053 lbs



Drills/Accessories

Twist drill

8.5 mm dia. BS 32

ZBS 150.90

special tool for for drilling aluminium steel | 8.5 mm dia. | 0.071 lbs



Twist drill

8.9 mm dia. BS 14

ZBS 117.90

special tool for drilling aluminium steel | 8.9 mm dia. | 0.068 lbs



Twist drill

9 mm dia. BS 5, BS 8

ZBS 113.90

special tool for drilling aluminium 9 mm dia. for use with steel \mid 9 mm dia. \mid 0.077 lbs



Twist drill

13 mm dia. for BS 6

ZBS 114.90

for drilling jig BS 6, Ø 13 mm, special machining tool for aluminium materials

steel | L 117 \times W 13 \times H 13 mm | 0.159 lbs



Step drill

12/6,5 mm dia. / 90° for drilling jig



ZBS 115.90

for drilling jig BS 3 / BS 8N / BS 31 / BS 32, Ø 12/6.5 mm, 90°, special machining tool for aluminium materials, with lockable depth stop ring

steel | L 112 \times W 44 \times H 20 mm | 0.249 lbs

Drills/Accessories

Step drill

12/6,5 mm dia. / 90° for drilling jig

ZBS 115B.90

for drilling jig BS 31 / BS 32, Ø 12/6.5 mm, 90°, special machining tool for aluminium materials steel | L 102 \times W 12 \times H 12 mm | 0.174 lbs





Depth stop ring

for ZBS 115B L 25 × W 20 × H 20 mm



ZBS 115A.90

for step drill ZBS 115B, with fixing screw steel | L 25 \times W 20 \times H 20 mm | 0.073 lbs

Countersink

16.5 mm dia./ 90° universal

ZBS 121.90

for universal use, 16.5 mm dia., 90° steel | L 60 × W 16 × H 16 mm | 0.09 lbs



Countersink

 $9.7 \, \text{mm} \, \text{dia.} \, / \, 90^{\circ}$ for BS 13

ZBS 122.90

for drilling jig BS 13, 9.7 mm dia., 90° steel | L 50 × W 10 × H 10 mm | 0.024 lbs



handtap drill

M10 L 140 × W 10 × H 10 mm

ZBS 130.90

for long internal threads in upright extrusions, M10, 140 mm long steel $\,|\,$ L 140 \times W 10 \times H 10 mm $\,|\,$ 0.13 lbs



Drills/Accessories

handtap drill

M8

for V extrusions

ZBS 131.90

for extrusions V 2000, V 2020, M8, with guide pin steel | L 115 \times W 8 \times H 8 mm | 0.082 lbs



Distance block

for BS 6



ZBS 140.90

for adjustment of drilling jig BS 6 to 32 mm extrusions, with mounting parts

steel | L 54 x B 40 x H 60 mm | 0.401 lbs

Spacer pins for BS 6 / BS 8N









ZBS 141.90

for drilling jig BS 6 / BS 8N, for adjustment of drilling jig to large lock chamber 39/12 mm, Set of 4 pieces

steel | L 18 x B 10 x H 10 mm | 0.013 lbs

Drilling jig accessory

for BS 6 L 150 × W 60 × H 30 mm



ZBS 145.90

for drilling jig BS 6, for fitting in tension lock Z 960 (Z 960 is for single use only), consisting of 1 \times exchangeable drill bush ZBS 103, 1 \times drill ZBS 151, 1 \times beam piece 15.3 mm

aluminium/steel | L 150 × W 60 × H 30 mm | 0.342 lbs

Twist drill

10 mm dia. for BS 31 / ZBS 145

ZBS 151.90

for drilling jig BS 31, supplementary set ZBS 145, \varnothing 10 mm, special machining tool for aluminium materials

steel | L 133 \times W 10 \times H 10 mm | 0.115 lbs



Drills/Accessories

Step drill

10/5,3 mm dia. /90° for drilling jig



ZBS 153.90

for drilling jig BS 33 / BS 34 / BS 35 / BS 36, 10/5.3 mm dia., 90°, special machining tool for aluminium materials, with lockable depth stop ring, 89 mm long

steel | L 89 mm | 0.126 lbs

Screwdriver

Screwdriver

hex-star T30 L 82 × W 98 × H 20 mm



E 13.90

hex-star T30 steel/plastic | L 82 \times W 98 \times H 20 mm | 0.13 lbs



Screwdriver

hex-star T30 for E 111



E 113.90

hex-star T30, for opening/closing hex-star screw E 111 e.g. internal corner connector Z 965B / Z 966 / M 1965B steel/plastic | L 232 \times W 35 \times H 35 mm | 0.269 lbs

Hexagon wrench

hex-star T30 L 78 × W 29 × H 6 mm

E 114.90

angle wrench, hex-star T30, for opening/closing hex-star screw E 111 e.g. internal corner connector Z 965B / Z 966 / M 1965 steel | L 78 \times W 29 \times H 6 mm | 0.044 lbs



Ratchet


1/4"



E 115.90

1/4"

steel | L 150 x B 22 x H 18 mm | 0.243 lbs



Ratchet accessory

hex-star T30 for E 115 / 1/4"



E 116.90

for ratchet E 115, hex-star T30, 1/4" plastic/steel | L 24 × W 21 × H 21 mm | 0.042 lbs

Screwdriver


Ratchet accessory

hex-star T30 for Z 961/8 / 1/4"



E 116/42.90

for tension lock Z 961/8, hex-star T30, 1/4" steel | L 40 \times W 13 \times H 13 mm | 0.046 lbs



Ratchet accessory

hex-star T30 1/4"



M 945.90

hex-star T30, 1/4", 90 mm long steel | L 90 mm | 0.053 lbs

Screwdriver


hex-star T30 97 mm long



M 951.90

hex-star T30 steel/plastic | L 0 x B 97 x H 0 mm | 0.163 lbs






Screwdriver

M 952.90

| plastic/steel hex-star T30 | L 0 x B 200 x H 0 mm | 0.19 lbs





	Notes	
`\		

octanorm 7.°

OCTANORM®-Vertriebs-GmbH

für Bauelemente Raiffeisenstraße 39 70794 Filderstadt, Germany **T** +49 711 77003 0

■ info@octanorm.de

Adria

→ octanormadria.com

Australia

Belgium * octanorm.be

China

Emirates

尽 octanormemirates.net

Espana

France

₹ octanorm.fr

Hellas

Italia

₹ octanorm.com

Japan

México

Nigeria

Nordic

North America

Polska

ಶ octanorm.pl

South Africa

UK

₹ octanorm.uk