


The inspection panel F 308 Cfl S1 has no rear hook and can be removed by simply lifting it upwards.  
First remove the surrounding connectors, then use the F2 tool to take out the panel in order to access the installations under the floor.

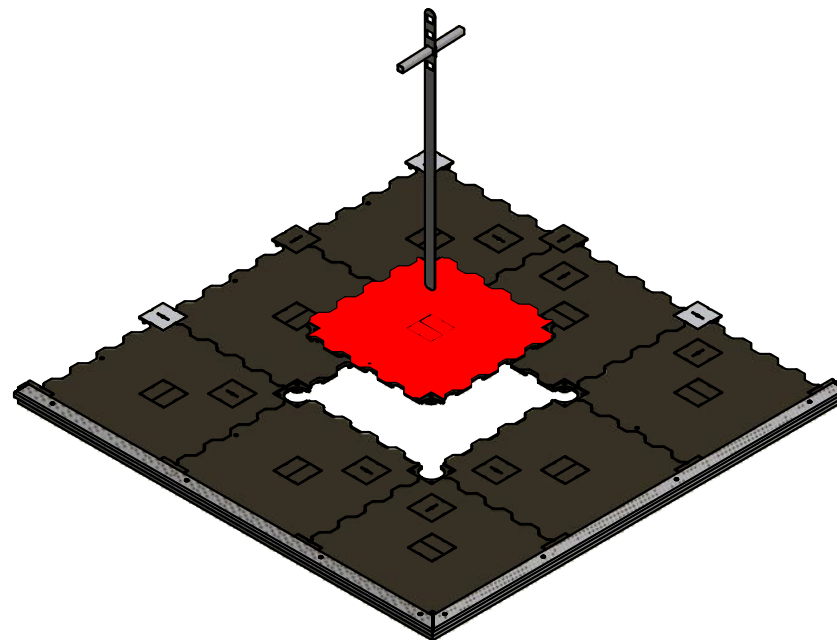

E-000647-0023A-T000 A Freigegeben 25.05.2022 FW

All dimensions in mm!  
The drawing remains basically valid!