



octaeco floor half cover cap cable outlet F 107 Cfl S1

TI-DB-10.4

technical information

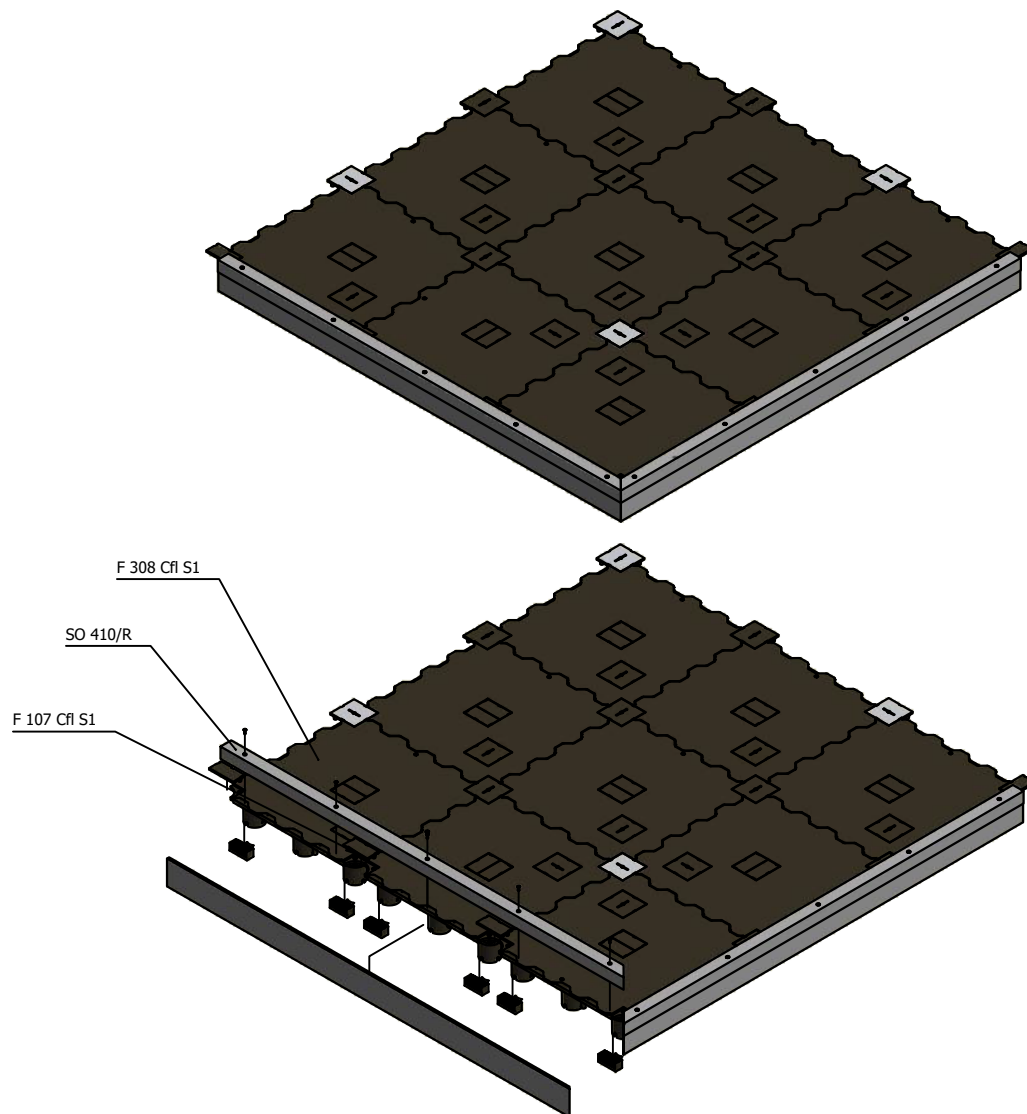

The F 107 Cfl S1 connectors are inserted at the outer edge of the octaeco floor surface at each joint of the F 304 Cfl S1 panels.
After installation, the connectors are secured with the SO 410 or SO 400 skirting extrusion.
Likewise, the F 107 Cfl S1 can be used to open the cable outlets in halves.

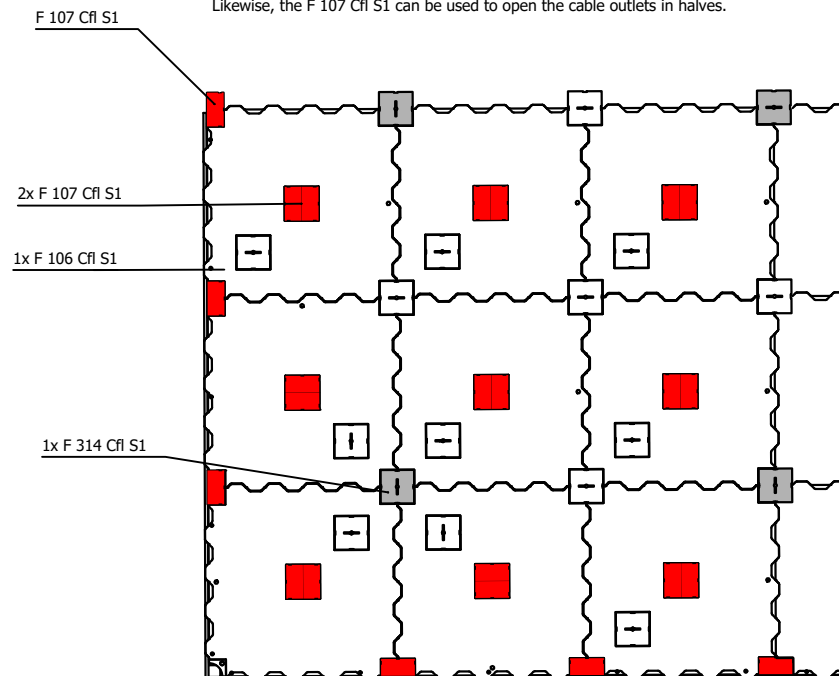

All dimensions in mm!
The drawing remains basically valid!