
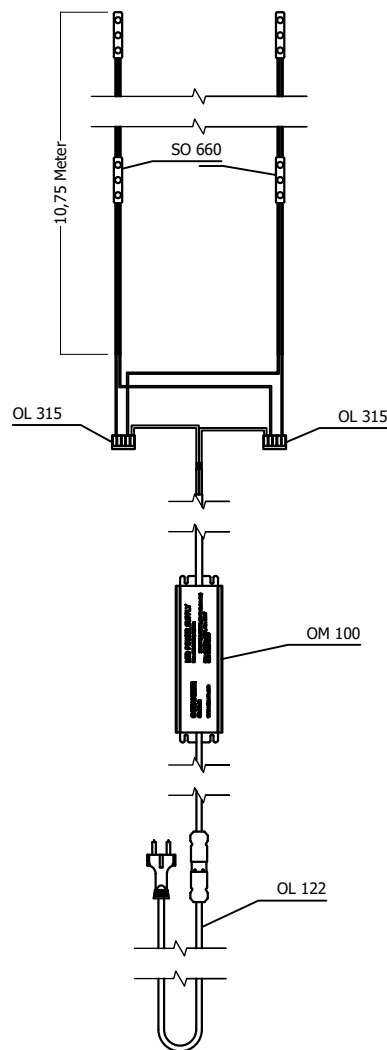
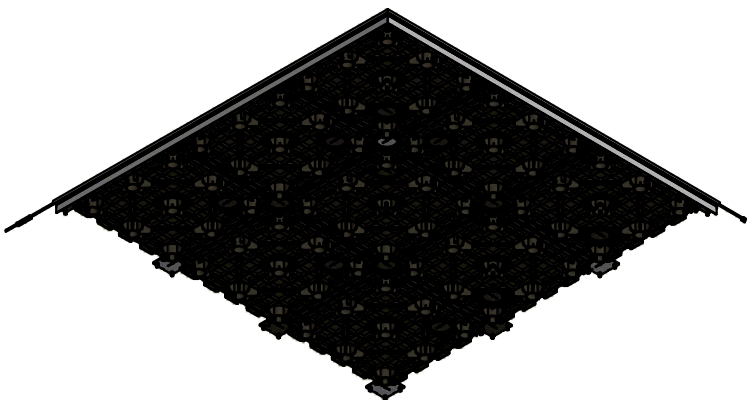


octaeco floor corner mounting position SO 630

TI-DB-10.9



technical information

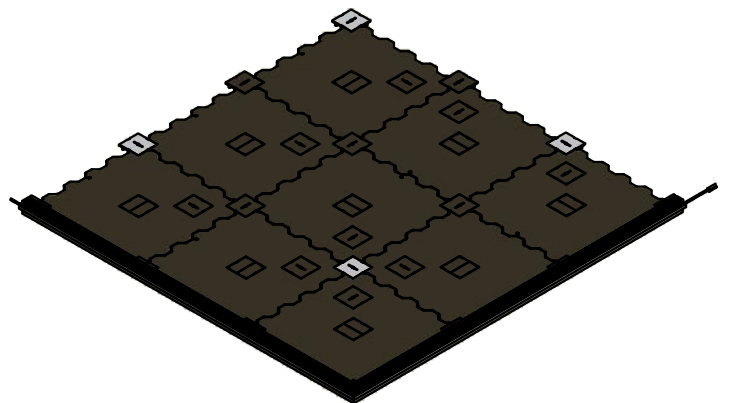

The angle extrusions SO 630/L and R for LEDs are mounted with countersunk screws ISR 4x16. Please make sure to start laying the angles and LEDs from the corner.

Attention: LEDs reflections on shiny floor!

SO 660 completely illuminates the plinth panel area and can be installed with an OM 100 converter up to 21.5 m in length.

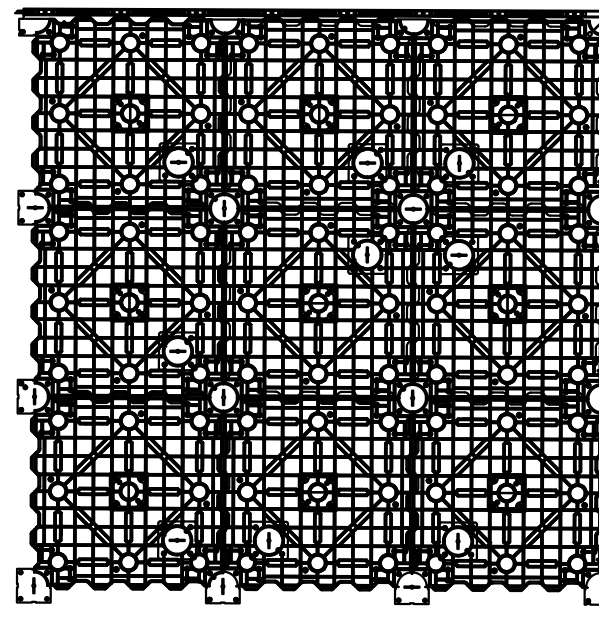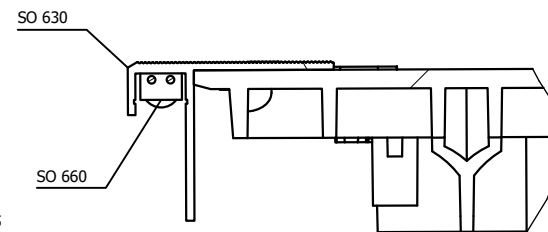

All dimensions in mm!
The drawing remains basically valid!