


Maximum possible load for extrusions as hinged support (with fixed head and foot), central load without horizontal forces

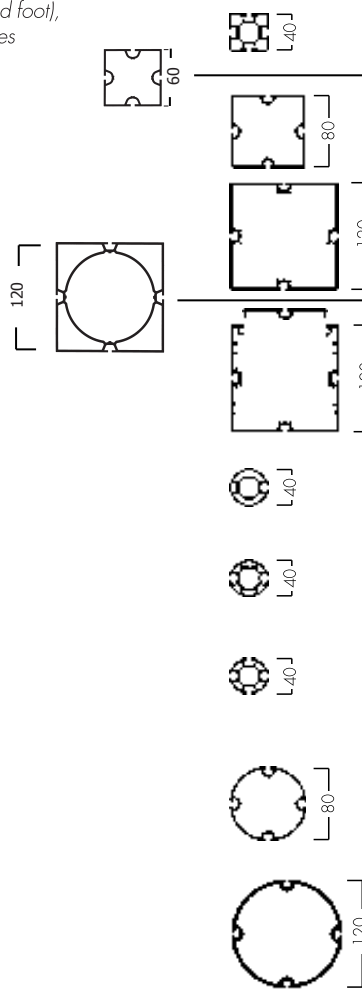

Article No.	Profile cross-cut (cm ²)	effective length of uprights											
		0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0
max. Belastung in kg (100 kg = 1 kN)/maximum load in kg (100 kg = 1 kN)													
M 1000	5.09	4.128	2.462	1.313	597	360	209	*138	0	0	0	0	0
M 1010													
M 1020	7.91	7.508	6.643	5.641	4.435	3.127	2.151	1.554	1.175	888	668	496	345
M 225	14.3	13.607	13.605	12.254	10.965	9.637	8.277	6.914	5.294	4.126	3.362	2.724	2.235
M 230													
M 1040	13.3	12.628	12.258	10.788	9.558	7.978	6.732	5.017	3.752	2.948	2.362	1.883	1.528
M 1201	3.85	2.899	1.360	590	314	169	*105	0	0	0	0	0	0
M 1202	4.48	3.428	1.697	742	397	221	*119	0	0	0	0	0	0
M 1204	4.09	3.134	1.564	690	368	210	*109	0	0	0	0	0	0
M 1220	6.61	6.282	5.368	4.329	3.282	2.108	1.453	1.042	765	569	415	283	168
M 235	13.1	12.450	12.206	10.826	9.651	7.981	6.730	5.081	3.903	3.089	2.470	2.047	1.724

TI M-3.0 04/2001geändert + neues Layout 09/2005 shift