
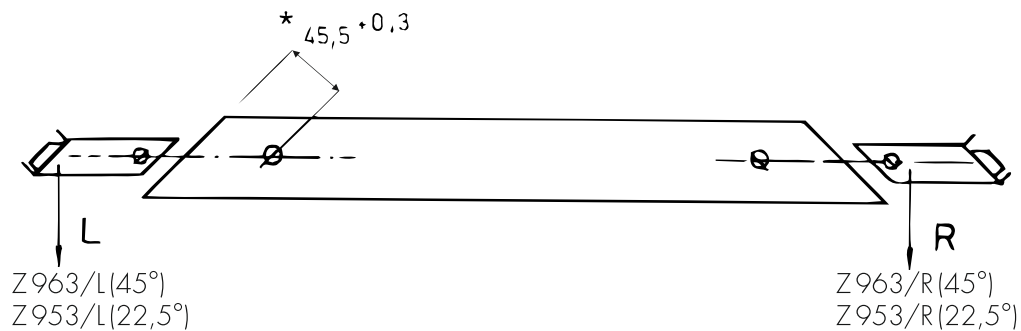
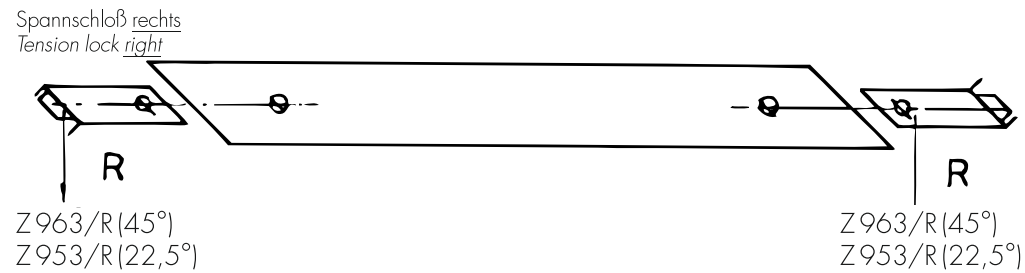


**Instructions for use
of tension locks 22.5°/45°**

Examples: *Miter-cut beams*
Tension lock versions L/R

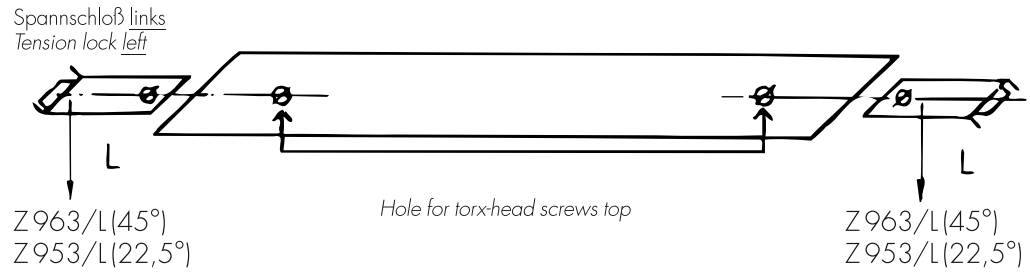

* Standard hole distance
applicable for tension
locks 22.5 and 45°

Z963
Tension lock 45°