Fabric/Panel Dimension WP 860-C...

Outside fabric width: outside frame dimension = **852 mm**
Outside fabric height: frame height = _____ **mm**

In the interior of the curved frame element, the fabric must be laminated onto the panel.

Outside panel width: outside frame dimension - 18 mm = **834 mm**
Outside panel height: frame height - 15 mm = _____ **mm**

Inside panel width: inside frame dimension - 1 mm = **724 mm**
Inside panel height: frame height - 5 mm = _____ **mm**
(possibly covered with fabric)

Panel thickness: recommended **2 mm** (max. 3 mm)

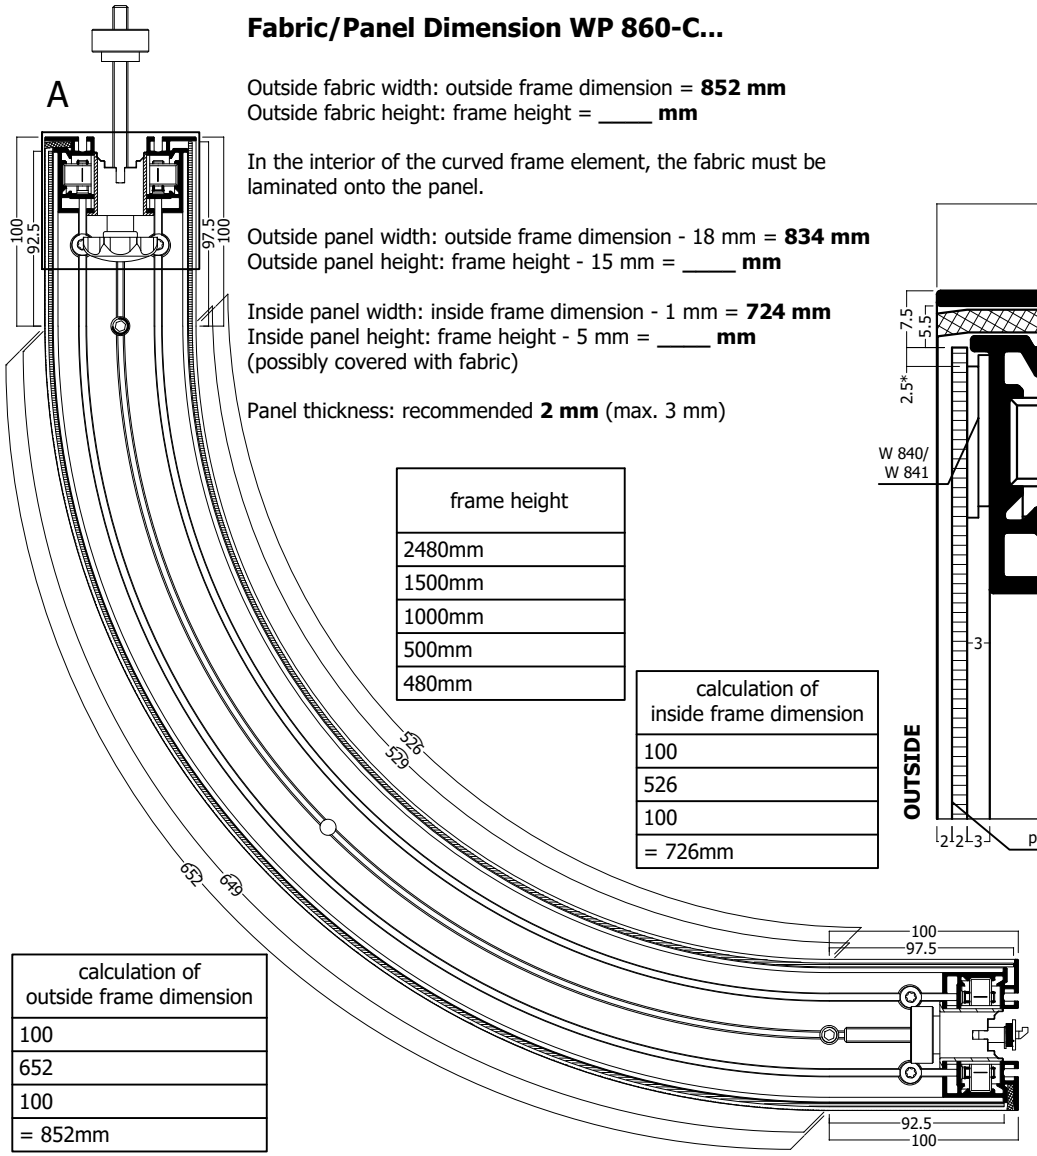

frame height
2480mm
1500mm
1000mm
500mm
480mm

calculation of inside frame dimension
100
526
100
= 726mm

calculation of outside frame dimension
100
652
100
= 852mm

A (1 : 1)

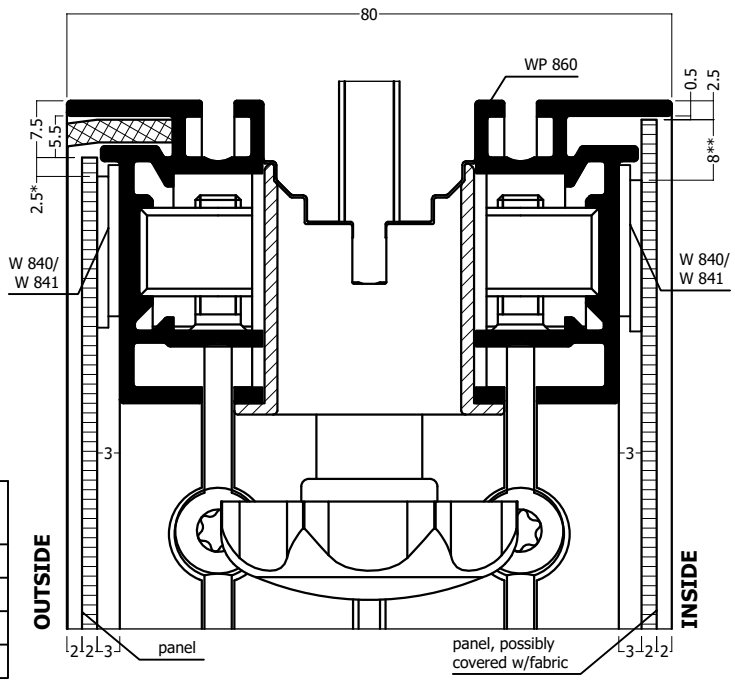

Detail Positioning of loop tape
*=edge distance loop tape outside
**=edge distance loop tape inside

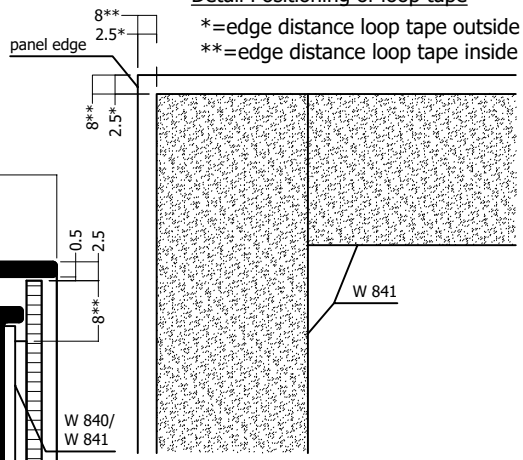

Backside view of panel

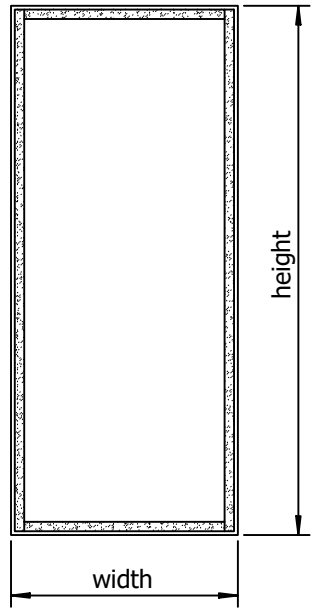

TIMBOWT940 E-000641-0692T-940 A Freigegeben 05.12.2023 ED

© OCTANORM Vertriebs GmbH für Bauelemente. Errors and technical modifications reserved.