



Frame type A

vertical U 1060
horizontal U 1060

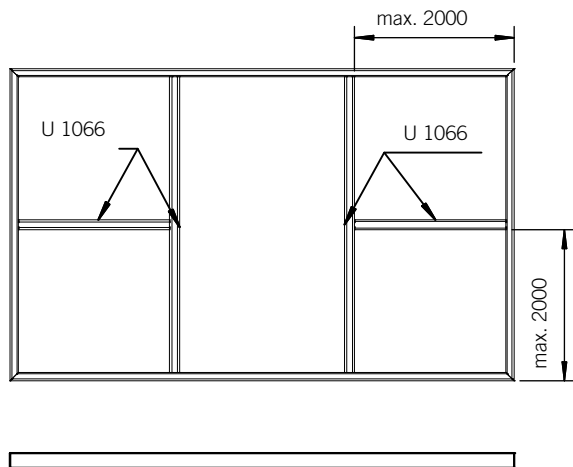





Frame type B

vertical U 1060 / U 1063
horizontal U 1060

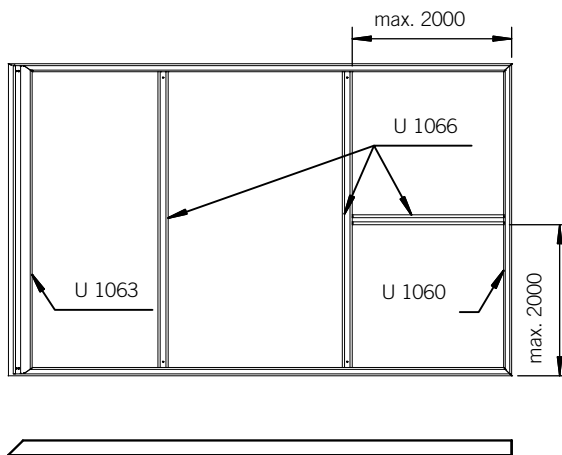


Frame type C


vertical U 1063
horizontal U 1060

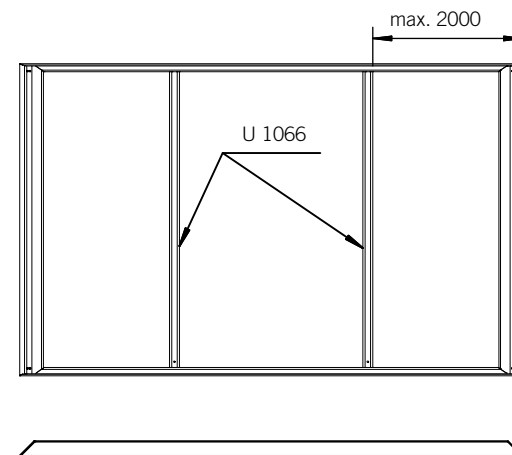


U 1060



U 1063



U 1066



The distance between reinforcements U 1066 must not exceed 2000mm max. Vertically mounted U 1063 extrusions do not require horizontal reinforcements when connected to other frames.

TI-OL-6.0 E-000622-0500A-000 A In Bearbeitung